

Monotone Circuit Lower Bounds from Resolution

Ankit Garg
Microsoft Research

Mika Göös
Harvard University

Pritish Kamath
MIT

Dmitry Sokolov
KTH

November 13, 2017

Abstract

For any unsatisfiable CNF formula F that is hard to refute in the *Resolution* proof system, we show that a gadget-composed version of F is hard to refute in any proof system whose lines are computed by efficient communication protocols—or, equivalently, that a monotone function associated with F has large monotone circuit complexity. Our result extends to monotone *real* circuits, which yields new lower bounds for the *Cutting Planes* proof system.

Contents

1	Appetizer	1
2	Dag-like models	1
2.1	Abstract dags	2
2.2	Concrete dags	2
3	Our results	3
3.1	Extension: Monotone real circuits	5
4	Subcubes from rectangles	5
4.1	Structured rectangles	5
4.2	Rectangle partition scheme	6
5	Lifting for rectangle-dags	7
5.1	Game semantics for dags	7
5.2	Simplified proof	8
5.3	Accounting for error	9
6	Lifting for triangle-dags	10
6.1	Triangle partition scheme	10
6.2	Simplified proof	11
7	Partitioning rectangles and triangles	12
7.1	Proof of Rectangle Lemma	12
7.2	Definition of Triangle Scheme	13
7.3	Properties of Triangle Scheme	14
7.4	Proof of Triangle Lemma	17
8	Translating between mKW/CNF	17
9	Open problems	19
A	Appendix: Proof of Lemma 4	19
	References	20

1 Appetizer

Dag-like communication protocols [Raz95, Pud10, Sok17], generalizing the usual notion of *tree-like* communication protocols [KN97, Juk12, RY17], provide a useful abstraction to study two kinds of objects in complexity theory:

- **Monotone circuits.** Let f be a monotone boolean function. The *monotone circuit complexity* of f can be characterized in the language of dag-like protocols. Namely, it equals the least size of a dag-like protocol that solves the *monotone Karchmer–Wigderson (mKW)* search problem associated with f .
- **Propositional proofs.** Let F be a CNF contradiction (an unsatisfiable CNF formula). Lower bounds for the *Resolution refutation size (aka length) complexity* of F —or indeed lower bounds for any propositional proof system whose lines are computed by efficient communication protocols—can be proved via dag-like protocols. Namely, a lower bound is given by the least size of a dag-like protocol that solves a certain CNF search problem associated with F .

In this paper, we prove a ***query-to-communication lifting theorem*** that escalates lower bounds for a dag-like query model (essentially Resolution) to lower bounds for dag-like communication protocols. In particular, this yields a new technique to prove size lower bounds for monotone circuits and several types of proof systems (including Cutting Planes).

The result can be interpreted as a ***converse*** to *monotone feasible interpolation* [BPR97, Kra97], which is a popular method to prove refutation size lower bounds for proof systems (such as Resolution and Cutting Planes) by reductions to monotone circuit lower bounds. A theorem of this type was conjectured by Beame, Pitassi, and Huynh [BHP10, §6]. We also note that lifting theory for deterministic *tree-like* protocols—with applications to monotone *formula size*, *tree-like refutation size*, and size–space tradeoffs—has been developed in quite some detail [RM99, HN12, GP14, GPW15, dRNV16, WYY17, CKLM17]. We import techniques from this line of work into the dag-like setting.

We formalize our result in [Section 3](#) after we have carefully defined our dag-like models in [Section 2](#).

2 Dag-like models

We define all computational models as solving *search problems*, defined by a relation $S \subseteq \mathcal{I} \times \mathcal{O}$ for some finite input and output sets \mathcal{I} and \mathcal{O} . On input $x \in \mathcal{I}$ the search problem is to find some output in $S(x) := \{o \in \mathcal{O} : (x, o) \in S\}$. We always assume S is *total* so that $S(x) \neq \emptyset$ for all $x \in \mathcal{I}$. We also define $S^{-1}(o) := \{x \in \mathcal{I} : (x, o) \in S\}$. For applications, the two most important examples of search problems, one associated with a monotone function $f: \{0, 1\}^n \rightarrow \{0, 1\}$, another with an n -variable CNF contradiction $F = \bigwedge_i D_i$ (where D_i are disjunctions of literals), are as follows.

mKW search problem S_f	=	<i>input:</i> a pair $(x, y) \in f^{-1}(1) \times f^{-1}(0)$
		<i>output:</i> a coordinate $i \in [n]$ such that $x_i > y_i$
CNF search problem S_F	=	<i>input:</i> an n -variable truth assignment $z \in \{0, 1\}^n$
		<i>output:</i> clause D of F unsatisfied by z , i.e., $D(z) = 0$

2.1 Abstract dags

We work with a *top-down* definition of dag-like models. A version of the following definition (with a specialized \mathcal{F}) was introduced by [Raz95] and subsequently simplified in [Pud10, Sok17].

Top-down definition. Let \mathcal{F} be a family of functions $\mathcal{I} \rightarrow \{0, 1\}$. An \mathcal{F} -dag solving $S \subseteq \mathcal{I} \times \mathcal{O}$ is a directed acyclic graph of fan-out ≤ 2 where each node v is associated with a function $f_v \in \mathcal{F}$ (we call $f_v^{-1}(1)$ the *feasible set* for v) satisfying the following:

1. *Root:* There is a distinguished root node r (fan-in 0), and $f_r \equiv 1$ is the constant 1 function.
2. *Non-leaves:* For each non-leaf node v with children u, u' , we have $f_v^{-1}(1) \subseteq f_u^{-1}(1) \cup f_{u'}^{-1}(1)$.
3. *Leaves:* Each leaf node v is labeled with an output $o_v \in \mathcal{O}$ such that $f_v^{-1}(1) \subseteq S^{-1}(o_v)$.

The *size* of an \mathcal{F} -dag is its number of nodes. If we specialize S to be a CNF search problem S_F , the above specializes to the familiar definition of refutations in a proof system whose lines are *negations* of functions in \mathcal{F} . Here is that dual definition, specialized to $S = S_F$.

Bottom-up definition. Let \mathcal{G} be a family of functions $\{0, 1\}^n \rightarrow \{0, 1\}$. (To match up with the top-down definition, one should take $\mathcal{G} := \{\neg f : f \in \mathcal{F}\}$.) A (semantic) \mathcal{G} -refutation of an n -variable CNF contradiction F is a directed acyclic graph of fan-out ≤ 2 where each node (or *line*) v is associated with a function $g_v \in \mathcal{G}$ satisfying the following:

1. *Root:* There is a distinguished root node r (fan-in 0), and $g_r \equiv 0$ is the constant 0 function.
2. *Non-leaves:* For each non-leaf node v with children u, u' , we have $g_v^{-1}(1) \supseteq g_u^{-1}(1) \cap g_{u'}^{-1}(1)$.
3. *Leaves:* Each leaf node v is labeled with a clause D of F such that $g_v^{-1}(1) \supseteq D^{-1}(1)$.

2.2 Concrete dags

We now instantiate the abstract model for the purposes of communication and query complexity.

Rectangle-dags (dag-like protocols). Consider a bipartite input domain $\mathcal{I} := \mathcal{X} \times \mathcal{Y}$ so that Alice holds $x \in \mathcal{X}$, Bob holds $y \in \mathcal{Y}$, and let \mathcal{F} be the set of all indicator functions of (*combinatorial*) *rectangles over* $\mathcal{X} \times \mathcal{Y}$ (sets of the form $X \times Y$ with $X \subseteq \mathcal{X}$, $Y \subseteq \mathcal{Y}$). Call such \mathcal{F} -dags simply *rectangle-dags*. For a search problem $S \subseteq \mathcal{X} \times \mathcal{Y} \times \mathcal{O}$ we define its *rectangle-dag complexity* by

$$\text{rect-dag}(S) := \text{least size of a rectangle-dag that solves } S.$$

In circuit complexity, a straightforward generalization of the Karchmer–Wigderson depth characterization [KW88] shows that the monotone circuit complexity of any monotone function f equals $\text{rect-dag}(S_f)$; see [Pud10, Sok17].

In proof complexity, a useful-to-study semantic proof system is captured by \mathcal{F}_c -dags solving CNF search problems S_F where \mathcal{F}_c is the family of all functions $\mathcal{X} \times \mathcal{Y} \rightarrow \{0, 1\}$ (where $\mathcal{X} \times \mathcal{Y} = \{0, 1\}^n$ is some bipartition of the input domain $\{0, 1\}^n$ of S_F) that can be computed by tree-like protocols of communication cost c , say for $c = \text{polylog}(n)$. Such a proof system can simulate other systems (such as Resolution and Cutting Planes with bounded coefficients), and hence lower bounds against \mathcal{F}_c -dags imply lower bounds for other concrete proof systems. Moreover, any \mathcal{F}_c -dag can be simulated by a rectangle-dag with at most a factor 2^c blow-up in size, and hence we do not lose much generality by studying only rectangle-dags.

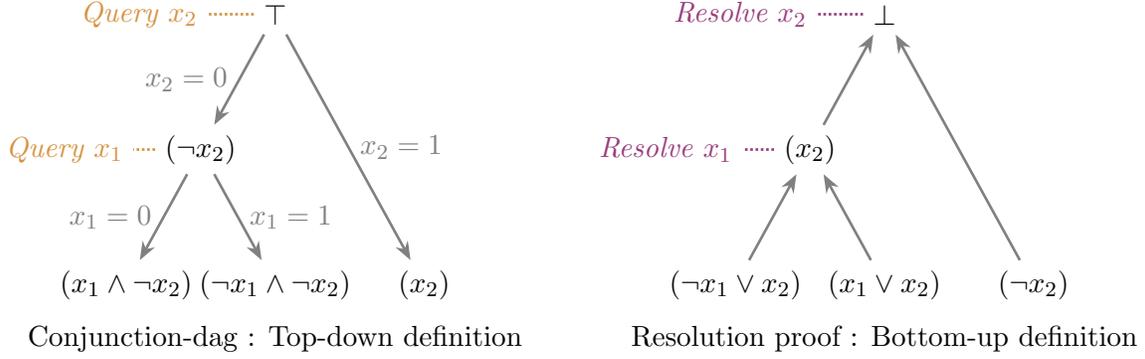


Figure 1: Two equivalent ways to view a Resolution refutation, illustrated in the tree-like case (see [Juk12, §18.2] for more discussion of the tree-like case).

Conjunction-dags (essentially Resolution). Consider the n -bit input domain $\mathcal{I} := \{0, 1\}^n$ and let \mathcal{F} be the set of all *conjunctions* of literals over the n input variables. Call such \mathcal{F} -dags simply *conjunction-dags*. We define the *width* of a conjunction-dag Π as the maximum width of a conjunction associated with a node of Π . For a search problem $S \subseteq \{0, 1\}^n \times \mathcal{O}$ we define

$$\begin{aligned} \text{conj-dag}(S) &:= \text{least size of a conjunction-dag that solves } S, \\ w(S) &:= \text{least width of a conjunction-dag that solves } S. \end{aligned}$$

In the context of CNF search problems $S = S_F$, conjunction-dags are equivalent to Resolution refutations; see also Figure 1. Indeed, $\text{conj-dag}(S_F)$ is just the Resolution refutation size complexity of F , and $w(S_F)$ is the Resolution width complexity of F [BW01].

The complexity measures introduced so far are related as follows; here S' is *any* two-party version of S obtained by choosing some bipartition $\mathcal{X} \times \mathcal{Y} = \{0, 1\}^n$ of the input domain of S :

$$\text{rect-dag}(S') \leq \text{conj-dag}(S) \leq n^{O(w(S))}. \quad (1)$$

The first inequality holds because each conjunction can be simulated by a rectangle. The second inequality holds since there are at most $n^{O(w)}$ many distinct width- w conjunctions, and we may assume wlog that any $f \in \mathcal{F}$ is associated with at most one node in an \mathcal{F} -dag (any incoming edge to a node v can be rewired to the *lowest* node u , in topological order, such that $f_v = f_u$).

3 Our results

Our first theorem is a characterization of the rectangle-dag complexity for *composed* search problems of the form $S \circ g^n$. Here $S \subseteq \{0, 1\}^n \times \mathcal{O}$ is an arbitrary n -bit search problem, and $g: \mathcal{X} \times \mathcal{Y} \rightarrow \{0, 1\}$ is some carefully chosen two-party *gadget* that helps to distribute each input bit of S between the two parties. More precisely, $S \circ g^n \subseteq \mathcal{X}^n \times \mathcal{Y}^n \times \mathcal{O}$ is the search problem where Alice holds $x \in \mathcal{X}^n$, Bob holds $y \in \mathcal{Y}^n$, and their goal is to find some $o \in S(z)$ for $z := g^n(x, y) = (g(x_1, y_1), \dots, g(x_n, y_n))$.

Our concrete choice for a gadget is the usual m -bit *index* function $\text{IND}_m: [m] \times \{0, 1\}^m \rightarrow \{0, 1\}$ mapping $(x, y) \mapsto y_x$. For large enough m , we show that the bounds (1) are tight.

Theorem 1. *Let $m = m(n) := n^\delta$ for a large enough constant δ . For any $S \subseteq \{0, 1\}^n \times \mathcal{O}$,*

$$\text{rect-dag}(S \circ \text{IND}_m^n) = n^{\Theta(w(S))}.$$

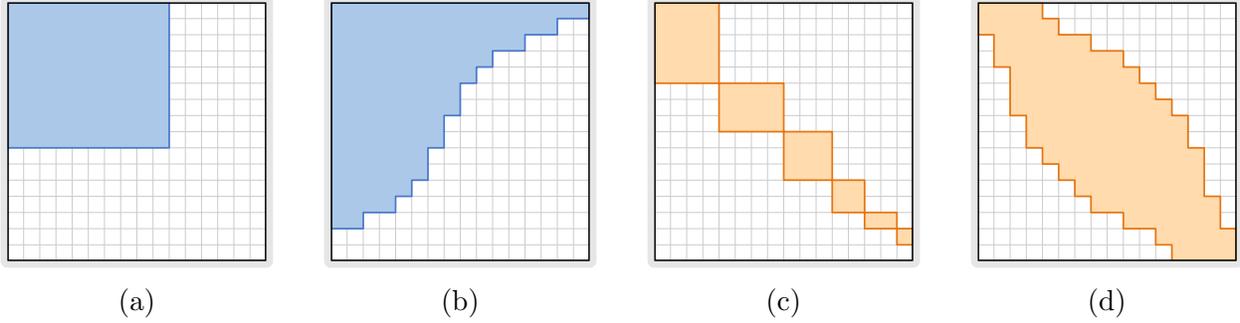


Figure 2: We show lifting theorems for dags whose feasible sets are (a) *rectangles* or (b) *triangles*. It remains open (see [Section 9](#)) to prove any lower bounds for explicit mKW/CNF search problems when the feasible sets are (c) *block-diagonal*, which is a special case of (d) *intersections of 2 triangles*.

Implications. The primary advantage of such a lifting theorem is that we obtain, in a generic fashion, a large class of hard (explicit) monotone functions and CNF contradictions. Indeed, let us see an example of how to apply our theorem. We can start with any n -variable k -CNF contradiction F of Resolution width w , and conclude from [Theorem 1](#) that the composed problem $S' := S_F \circ \text{IND}_m^n$ has rectangle-dag complexity $n^{\Theta(w)}$. Then we can use known reductions to translate S' back to a mKW/CNF search problem. We recall such reductions in [Section 8](#), but the upshot will be that:

- S' reduces to $S_{f'}$ where f' is some N -bit monotone function with $N := n^{O(k)}$.
- S' reduces to $S_{F'}$ where F' is some $n^{O(1)}$ -variable $2k$ -CNF contradiction.

A disadvantage, stemming from the large gadget size $m = \text{poly}(n)$, is that we get at best (using $w = \Theta(n)$) a monotone circuit lower bound of $\exp(N^\varepsilon)$ for a small constant $\varepsilon > 0$. This falls especially short of the current best record of $\exp(N^{1/3-o(1)})$ shown for an explicit monotone function by Harnik and Raz [[HR00](#)]. For this reason (and others), it is an important open problem to develop a lifting theory for gadgets of size $m = O(1)$. In particular, an optimal $2^{\Omega(N)}$ lower bound would follow from an appropriate constant-size-gadget version of [Theorem 1](#); see [Section 8](#) for details.

Techniques. We use tools developed in the context of tree-like lifting theorems, specifically from [[GLM⁺16](#), [GPW17](#)]. These tools allow us to relate large rectangles in the input domain of $S \circ \text{IND}_m^n$ with large subcubes in the input domain of S ; see [Section 4](#). Given these tools, the proof of [Theorem 1](#) is relatively short (two pages). The proof is extremely direct: from any rectangle-dag of size n^d solving $S \circ \text{IND}_m^n$ we extract a width- $O(d)$ conjunction-dag solving S .

Classical works on monotone circuit lower bounds have typically focused on specific monotone functions [[Raz85](#), [And85](#), [AB87](#), [Hak95](#), [Ros14](#)] and more generally on studying the power of the underlying proof methods [[Raz89](#), [Wig93](#), [Raz97](#), [ST97](#), [BU99](#), [AM04](#)]. A notable exception is Jukna’s criterion [[Juk97](#)], recently applied in [[HP17b](#), [FPPR17](#)], which is a general sufficient condition for a monotone function to require large monotone circuit complexity. Our perspective is seemingly even more abstract, as our result is phrased for arbitrary search problems (not just of mKW/CNF type). However, it remains unclear exactly how the power of our methods compare with the classical techniques; for example, can our result be rephrased in the language of Razborov’s method of approximations?

3.1 Extension: Monotone real circuits

Triangle-dags. Consider a bipartite input domain $\mathcal{I} := \mathcal{X} \times \mathcal{Y}$ and let \mathcal{F} be the set of all indicator functions of (*combinatorial*) *triangles over* $\mathcal{X} \times \mathcal{Y}$; here a *triangle* $T \subseteq \mathcal{X} \times \mathcal{Y}$ is a set that can be written as $T = \{(x, y) \in \mathcal{X} \times \mathcal{Y} : a_T(x) < b_T(y)\}$ for some labeling of the rows $a_T: \mathcal{X} \rightarrow \mathbb{R}$ and columns $b_T: \mathcal{Y} \rightarrow \mathbb{R}$ by real numbers; see [Figure 2b](#). In particular, every rectangle is a triangle. Call such \mathcal{F} -dags simply *triangle-dags*. For a search problem $S \subseteq \mathcal{X} \times \mathcal{Y} \times \mathcal{O}$ we define

$$\text{tri-dag}(S) := \text{least size of a triangle-dag that solves } S.$$

Hrubeš and Pudlák [[HP17a](#)] showed recently that the *monotone real circuit complexity* of an f equals $\text{tri-dag}(S_f)$. Monotone real circuits [[HC99](#), [Pud97](#)] generalize monotone circuits by allowing the wires to carry arbitrary real numbers and the binary gates to compute arbitrary monotone functions $\mathbb{R} \times \mathbb{R} \rightarrow \mathbb{R}$. The original motivation to study such circuits, and what interests us here, is that lower bounds for monotone real circuits imply lower bounds for the *Cutting Planes* proof system [[CCT87](#)]. In our language, semantic Cutting Planes refutations are equivalent to \mathcal{L} -dags solving CNF search problems, where \mathcal{L} is the family of linear threshold functions (each $f \in \mathcal{L}$ is defined by some $(n + 1)$ -tuple $a \in \mathbb{R}^{n+1}$ so that $f(x) = 1$ iff $\sum_{i \in [n]} a_i x_i > a_{n+1}$).

Our second theorem states that [Theorem 1](#) holds more generally with rectangle-dags replaced with triangle-dags. The proof is however more involved than the proof for [Theorem 1](#).

Theorem 2. *Let $m = m(n) := n^\delta$ for a large enough constant δ . For any $S \subseteq \{0, 1\}^n \times \mathcal{O}$,*

$$\text{tri-dag}(S \circ \text{IND}_m^n) = n^{\Theta(w(S))}.$$

A pithy corollary is that if we start with any CNF contradiction F that is hard for Resolution and compose F with a gadget (as described in [Section 8](#)), the formula becomes hard for Cutting Planes. Previously, only few examples of hard contradictions were known for Cutting Planes, all proved via feasible interpolation [[Pud97](#), [HC99](#), [HP17b](#), [FPPR17](#)]. A widely-asked question has been to improve this state-of-the-art by developing alternative lower bound methods; see the surveys [[BP01](#), §4] and [[Raz16b](#), §5]. In particular, Jukna [[Juk12](#), Research Problem 19.17] asked to find a more intuitive “combinatorial” proof method “explicitly showing what properties of [contradictions] force long derivations.” It is unclear how “combinatorial” our method is, but at least it does afford a simple intuition: the hardness is simply borrowed from the realm of Resolution (where we understand very well what makes formulas hard).

4 Subcubes from rectangles

In this section, as preparation, we recall some technical notions from [[GLM⁺16](#), [GPW17](#)] concerning the index gadget $g := \text{IND}_m$. Namely, writing $G := g^n: [m]^n \times \{0, 1\}^{mn} \rightarrow \{0, 1\}^n$ for n copies of g , we explain how large rectangles in G ’s domain are related with large subcubes in G ’s codomain.

4.1 Structured rectangles

For a partial assignment $\rho \in \{0, 1, *\}^n$ we let $\text{free } \rho := \rho^{-1}(*)$ denote its *free* coordinates, and $\text{fix } \rho := [n] \setminus \text{free } \rho$ denote its *fixed* coordinates. The number of fixed coordinates $|\text{fix } \rho|$ is the *width* of ρ . Width- d partial assignments are naturally in 1-to-1 correspondence with width- d conjunctions: for any ρ we define $C_\rho: \{0, 1\}^n \rightarrow \{0, 1\}$ as the width- $|\text{fix } \rho|$ conjunction that accepts an $x \in \{0, 1\}^n$ iff x is consistent with ρ . Thus $C_\rho^{-1}(1) = \{x \in \{0, 1\}^n : x_i = \rho_i \text{ for all } i \in \text{fix } \rho\}$ is a subcube. We

say that $R \subseteq [m]^n \times \{0, 1\}^{mn}$ is ρ -like if the image of R under G is precisely the subcube of n -bit strings consistent with ρ , that is, in short,

$$R \text{ is } \rho\text{-like} \iff G(R) = C_\rho^{-1}(1).$$

For a random variable \mathbf{x} we let $\mathbf{H}_\infty(\mathbf{x}) := \min_x \log(1/\Pr[\mathbf{x} = x])$ denote the usual *min-entropy* of \mathbf{x} . When $\mathbf{x} \in [m]^J$ for some index set J , we write $\mathbf{x}_I \in [m]^I$ for the marginal distribution of \mathbf{x} on a subset $I \subseteq J$ of blocks. For a set X we use the boldface \mathbf{X} to denote a random variable uniformly distributed over X .

Definition 1 ([GLM⁺16, GPW17]). A rectangle $R := X \times Y \subseteq [m]^n \times \{0, 1\}^{mn}$ is ρ -structured if

1. $\mathbf{X}_{\text{fix } \rho}$ is fixed, and every $z \in G(R)$ is consistent with ρ , that is, $G(R) \subseteq C_\rho^{-1}(1)$.
2. $\mathbf{X}_{\text{free } \rho}$ is 0.9-dense: for every nonempty $I \subseteq \text{free } \rho$, \mathbf{X}_I has *min-entropy rate* ≥ 0.9 , that is, $\mathbf{H}_\infty(\mathbf{X}_I) \geq 0.9 \cdot |I| \log m$.
3. Y is large enough: $\mathbf{H}_\infty(\mathbf{Y}) \geq mn - n^3$.

Lemma 3 ([GKPW17, GPW17]). *Every ρ -structured rectangle is ρ -like.*

In this work we need a slight strengthening of **Lemma 3**: for a ρ -structured R , there is a *single row* of R that is already ρ -like. The proof is given in [Appendix A](#).

Lemma 4. *Let $X \times Y$ be ρ -structured. There exists an $x \in X$ such that $\{x\} \times Y$ is ρ -like.*

4.2 Rectangle partition scheme

We claim that, given any rectangle $R := X \times Y \subseteq [m]^n \times \{0, 1\}^{mn}$, we can partition most of $X \times Y$ into ρ -structured subrectangles with $|\text{fix } \rho|$ bounded in terms of the size of $X \times Y$. Indeed, we describe a simple 2-round partitioning scheme from [GPW17] below; see also [Figure 3](#). In the 1st round of the algorithm, we partition the rows as $X = \bigsqcup_i X^i$ where each X^i will be fixed on some blocks $I_i \subseteq [n]$ and 0.95-dense on the remaining blocks $[n] \setminus I_i$. In the 2nd round, each $X^i \times Y$ is further partitioned along columns so as to fix the outputs of the gadgets on coordinates I_i .

Rectangle Scheme

Input: $R = X \times Y \subseteq [m]^n \times \{0, 1\}^{mn}$.

Output: A partition of R into subrectangles.

1: **1st round:** Iterate the following for $i = 1, 2, \dots$, until X becomes empty:

- (i) Let $I_i \subseteq [n]$ be a *maximal* subset (possibly $I_i = \emptyset$) such that \mathbf{X}_{I_i} has min-entropy rate < 0.95 , and let $\alpha_i \in [m]^{I_i}$ be an outcome witnessing this: $\Pr[\mathbf{X}_{I_i} = \alpha_i] > m^{-0.95|I_i|}$
- (ii) Define $X^i := \{x \in X : x_{I_i} = \alpha_i\}$
- (iii) Update $X \leftarrow X \setminus X^i$

2: **2nd round:** For each part X^i and $\gamma \in \{0, 1\}^{I_i}$, define $Y^{i,\gamma} := \{y \in Y : g^{I_i}(\alpha_i, y_{I_i}) = \gamma\}$

3: **return** $\{R^{i,\gamma} := X^i \times Y^{i,\gamma} : Y^{i,\gamma} \neq \emptyset\}$

All the properties of [Rectangle Scheme](#) that we will subsequently need are formalized below; see also [Figure 3](#). For terminology, given a subset $A' \subseteq A$ we define its *density* (inside A) as $|A'|/|A|$. The proof of the following lemma is postponed to [Section 7](#).

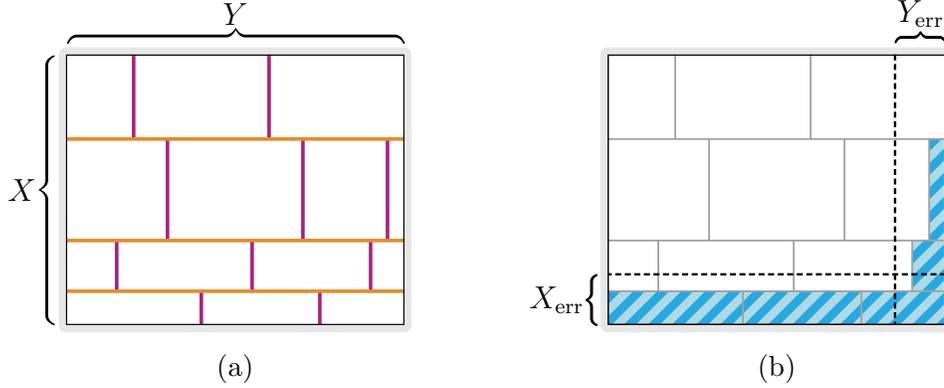


Figure 3: (a) **Rectangle Scheme** partitions $R = X \times Y$ first along rows, then along columns. (b) **Rectangle Lemma** illustrated: most subrectangles are ρ -structured for low-width ρ , except some error parts (highlighted in figure) that are contained in few error rows/columns $X_{\text{err}}, Y_{\text{err}}$.

Rectangle Lemma. Fix any parameter $k \leq n \log n$. Given a rectangle $R \subseteq [m]^n \times \{0, 1\}^{mn}$, let $R = \bigsqcup_i R^i$ be the output of **Rectangle Scheme**. Then there exist “error” sets $X_{\text{err}} \subseteq [m]^n$ and $Y_{\text{err}} \subseteq \{0, 1\}^{mn}$, both of density $\leq 2^{-k}$ (inside their respective sets), such that for each i , one of the following holds:

- **Structured case:** R^i is ρ^i -structured for some ρ^i of width at most $O(k/\log n)$. Moreover, every subrectangle $R' \subseteq R^i$ of density $\geq 1/2$ is also ρ^i -structured.
- **Error case:** R^i is covered by error rows/columns, i.e., $R^i \subseteq X_{\text{err}} \times \{0, 1\}^{mn} \cup [m]^n \times Y_{\text{err}}$.

Finally, a **query alignment** property holds: for every $x \in [m]^n \setminus X_{\text{err}}$, there exists a subset $I_x \subseteq [n]$ with $|I_x| \leq O(k/\log n)$ such that every “structured” R^i intersecting $\{x\} \times \{0, 1\}^{mn}$ has $\text{fix } \rho^i \subseteq I_x$.

5 Lifting for rectangle-dags

In this section we prove the nontrivial direction of **Theorem 1**: Let Π be a rectangle-dag solving $S \circ G$ of size n^d for some d . Our goal is to show that $w(S) \leq O(d)$.

5.1 Game semantics for dags

For convenience (and fun), we use the language of two-player competitive games, introduced in [Pud00, AD08], which provide an alternative way of thinking about conjunction-dags solving $S \subseteq \{0, 1\}^n \times \mathcal{O}$. The game involves two competing players, *Explorer* and *Adversary*, and proceeds in rounds. The state of the game in each round is modeled as a partial assignment $\rho \in \{0, 1, *\}^n$. At the start of the game, $\rho := *^n$. In each round, Explorer makes one of two moves:

- *Query a bit:* Explorer specifies an $i \in \text{free } \rho$, and Adversary responds with a bit $b \in \{0, 1\}$. The state ρ is updated by $\rho_i \leftarrow b$.
- *Forget a bit:* Explorer specifies an $i \in \text{fix } \rho$, and the state is updated by $\rho_i \leftarrow *$.

An important detail is that Adversary is allowed to choose $b \in \{0, 1\}$ freely even if the i -th bit was queried (with response different from b) and subsequently forgotten during past play. The game ends when a solution to S can be inferred from ρ , that is, when $C_\rho^{-1}(1) \subseteq S^{-1}(o)$ for some $o \in \mathcal{O}$.

Explorer’s goal is to end the game while keeping the width of the game state ρ as small as possible. Indeed, Atserias and Dalmau [AD08] prove that $w(S)$ is characterized (up to an additive ± 1) as the least w such that the Explorer has a strategy for ending the game that keeps the width of the game state at most w throughout the game. (A similar characterization exists for dag *size* [Pud00].) Hence our goal becomes to describe a Explorer-strategy for S such that the width of the game state never exceeds $O(d)$ regardless of how the Adversary plays.

5.2 Simplified proof

To explain the basic idea, we first give a simplified version of the proof: We assume that all rectangles R involved in Π —call them the *original* rectangles—can be partitioned *errorlessly* into ρ -structured subrectangles for ρ of width $O(d)$. That is, invoking **Rectangle Scheme** for each original R , we assume that

- (*) *Assumption:* All subrectangles in the partition $R = \bigsqcup_i R^i$ output by **Rectangle Scheme** satisfy the “structured” case of **Rectangle Lemma** for $k := 2d \log n$.


In **Section 5.3** we remove this assumption by explaining how the proof can be modified to work in the presence of some error rows/columns.

Overview. We extract a width- $O(d)$ Explorer-strategy for S by walking down the rectangle-dag Π , starting at the root. For each original rectangle R that is reached in the walk, we maintain a ρ -structured subrectangle $R' \subseteq R$ chosen from the partition of R . Note that ρ will have width $O(d)$ by our choice of k . The intention is that ρ will record the current state of the game. There are three issues to address: (1) Why is the starting condition of the game met? (2) How do we take a step from a node of Π to one of its children? (3) Why are we done once we reach a leaf?

(1) Root case. At start, the root of Π is associated with the original rectangle $R = [m]^n \times \{0, 1\}^{mn}$ comprising the whole domain. The partition of R computed by **Rectangle Scheme** is trivial: it contains a single part, the \ast^n -structured R itself. Hence we simply maintain the \ast^n -structured $R \subseteq R$, which meets the starting condition for the game.

(2) Internal step. This is the crux of the argument: Supposing the game has reached state $\rho_{R'}$ and we are maintaining some $\rho_{R'}$ -structured subrectangle $R' \subseteq R$ associated with an internal node v , we want to move to some $\rho_{L'}$ -structured subrectangle $L' \subseteq L$ associated with a child of v . Moreover, we must keep the width of the game state at most $O(d)$ during this move.

Let the two original rectangles associated with the children of v be L and L^* . Because $R' \subseteq L \cup L^*$ at least one of L and L^* , say L , covers at least half of R' . That is, the rectangle $X' \times Y' := R' \cap L$ has density $\geq 1/2$ inside R' . Since R' satisfies the “structured” case in **Rectangle Lemma**, $X' \times Y'$ is still $\rho_{R'}$ -structured. By **Lemma 4** there exists some $x^* \in X'$ such that $\{x^*\} \times Y'$ is $\rho_{R'}$ -like.

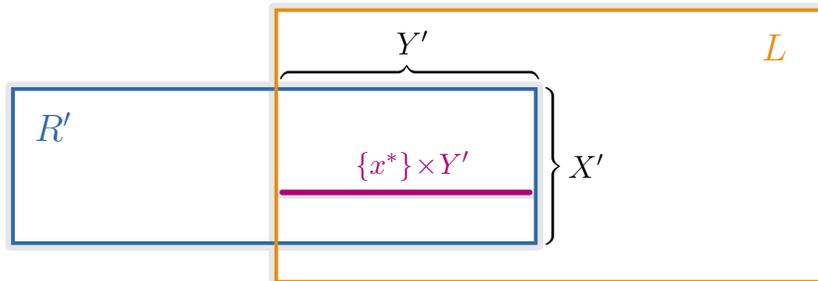

Let $\bigsqcup_i L^i$ be the partition of L output by **Rectangle Scheme**. By query alignment in **Rectangle Lemma**, there is some $I^* \subseteq [n]$, $|I^*| \leq O(d)$, such that all L^i that intersect the x^* -th row are ρ^i -structured with $\text{fix } \rho^i \subseteq I^*$. As Explorer, we now query the input bits in coordinates $J := I^* \setminus \text{fix } \rho_{R'}$ (in any order) obtaining some response string $z_J \in \{0, 1\}^J$ from the Adversary. As a result, the state of the game becomes the extension of $\rho_{R'}$ by z_J , call it ρ^* , which has width $|\text{fix } \rho^*| = |\text{fix } \rho_{R'} \cup J| \leq O(d)$.

Note that there is some $y^* \in Y'$ (and hence some $(x^*, y^*) \in R' \cap L$) such that $G(x^*, y^*)$ is consistent with ρ^* ; indeed, the whole row $\{x^*\} \times Y'$ is $\rho_{R'}$ -like and ρ^* extends $\rho_{R'}$. In the partition of L , let L' be the unique part such that $(x^*, y^*) \in L'$. Note that L' is $\rho_{L'}$ -like for some $\rho_{L'}$ that is consistent with $G(x^*, y^*)$ and $\text{fix } \rho_{L'} \subseteq I^*$ (by query alignment). Hence ρ^* extends $\rho_{L'}$. As Explorer, we now forget all queried bits in ρ^* except those queried in $\rho_{L'}$.

We have recovered our invariant: the game state is $\rho_{L'}$ and we maintain a $\rho_{L'}$ -structured subrectangle L' of an original rectangle L . Moreover, the width of the game state remained $O(d)$.

(3) Leaf case. Suppose the game state is ρ and we are maintaining an associated ρ -structured subrectangle $R' \subseteq R$ corresponding to a *leaf* node. The leaf node is labeled with some solution $o \in \mathcal{O}$ satisfying $R' \subseteq (S \circ G)^{-1}(o)$, that is, $G(R') \subseteq S^{-1}(o)$. But $G(R') = C_\rho^{-1}(1)$ by **Lemma 3** so that $C_\rho^{-1}(1) \subseteq S^{-1}(o)$. Therefore the game ends. This concludes the (simplified) proof.

5.3 Accounting for error

Next, we explain how to get rid of the assumption **(*)** by accounting for the rows and columns that are classified as error in **Rectangle Lemma** for $k := 2d \log n$. The partitioning of Π 's rectangles is done more carefully: We sort all original rectangles in *reverse topological order* R_1, R_2, \dots, R_{n^d} from leaves to root, that is, if R_i is a descendant of R_j then R_i comes before R_j in the order. Then we process the rectangles in this order:

Initialize cumulative error sets $X_{\text{err}}^* = Y_{\text{err}}^* := \emptyset$. Iterate for $i = 1, 2, \dots, n^d$ rounds:

1. Remove from R_i the rows/columns $X_{\text{err}}^*, Y_{\text{err}}^*$. That is, update

$$R_i \leftarrow R_i \setminus (X_{\text{err}}^* \times \{0, 1\}^{mn} \cup [m]^n \times Y_{\text{err}}^*).$$

2. Apply the **Rectangle Scheme** for R_i . Output all resulting subrectangles that satisfy the “structured” case of **Rectangle Lemma** for $k := 2d \log n$. (All non-structured subrectangles are omitted). Call the resulting error rows/columns X_{err} and Y_{err} .
3. Update $X_{\text{err}}^* \leftarrow X_{\text{err}}^* \cup X_{\text{err}}$ and $Y_{\text{err}}^* \leftarrow Y_{\text{err}}^* \cup Y_{\text{err}}$.

In words, an original rectangle R_i is processed only after all of its descendants are partitioned. Each descendant may contribute some error rows/columns, accumulated into sets $X_{\text{err}}^*, Y_{\text{err}}^*$, which are deleted from R_i before it is partitioned. The partitioning of R_i will in turn contribute its error rows/columns to its ancestors.

We may now repeat the proof of **Section 5.2** verbatim *using only the structured subrectangles output by the above process*. That is, we still maintain the same invariant: when the game state is ρ , we maintain a ρ -structured R' (output by the above process) of an original R . We highlight only the key points below.

(1) Root case. The cumulative error at the end of the process is tiny: $X_{\text{err}}^*, Y_{\text{err}}^*$ have density at most $n^d \cdot n^{-2d} \leq 1/4$ by a union bound over all rounds. In particular, the root rectangle R_{n^d} (with errors removed) still has density $\geq 1/2$ inside $[m]^n \times \{0, 1\}^{mn}$, and so the partition output by **Rectangle Scheme** is trivial, containing only the ρ -structured R_{n^d} itself. This meets the starting condition for the game.

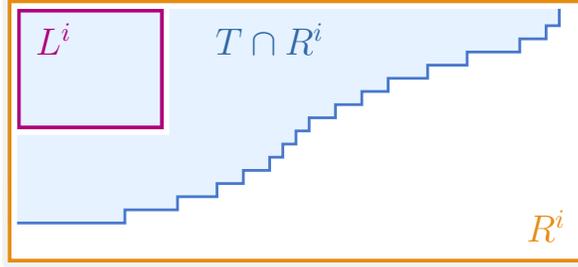


Figure 4: Structured case of **Triangle Lemma**: The subtriangle $T \cap R^i$ is sandwiched between two ρ^i -structured rectangles L^i and R^i .

(2) **Internal step.** By construction, the cumulative error sets *shrink* when we take a step from a node to one of its children. This means that our error handling does not interfere with the internal step: each structured subrectangle R' of an original rectangle R is wholly covered by the structured subrectangles of R 's children.

(3) **Leaf case.** This case is unchanged.

6 Lifting for triangle-dags

In this section we prove the nontrivial direction of **Theorem 2**: Let Π be a triangle-dag solving $S \circ G$ of size n^d for some d . Our goal is to show that $w(S) \leq O(d)$.

The proof is conceptually the same as for rectangle-dags. The only difference is that we need to replace **Rectangle Scheme** (and the associated **Rectangle Lemma**) with an algorithm that partitions a given triangle $T \subseteq [m]^n \times \{0, 1\}^{mn}$ into subtriangles that behave like conjunctions.

6.1 Triangle partition scheme

We introduce a triangle partitioning algorithm, **Triangle Scheme**. Its precise definition is postponed to **Section 7.2**. For now, we only need its high-level description: On input a triangle T , **Triangle Scheme** outputs a disjoint cover $\bigsqcup_i R^i \supseteq T$ where R^i are rectangles. This induces a partition of T into subtriangles $T \cap R^i$. Each (non-error) rectangle R^i is ρ^i -structured (for low-width ρ^i) and is associated with a ρ^i -structured “inner” subrectangle $L^i \subseteq R^i$ satisfying $L^i \subseteq T \cap R^i \subseteq R^i$; see **Figure 4**. Hence $T \cap R^i$ is ρ^i -like, as it is sandwiched between two ρ^i -like rectangles.

More formally, all the properties of **Triangle Scheme** that we will subsequently need are formalized below (note the similarity with **Rectangle Lemma**); see **Section 7.4** for the proof.

Triangle Lemma. Fix any parameter $k \leq n \log n$. Given a triangle $T \subseteq [m]^n \times \{0, 1\}^{mn}$, let $\bigsqcup_i R^i$ be the output of **Triangle Scheme**. Then there exist “error” sets $X_{\text{err}} \subseteq [m]^n$ and $Y_{\text{err}} \subseteq \{0, 1\}^{mn}$, both of density $\leq 2^{-k}$ (inside their respective sets), such that for each i , one of the following holds:

- **Structured case:** R^i is ρ^i -structured for some ρ^i of width at most $O(k/\log n)$. Moreover, there exists an “inner” rectangle $L^i \subseteq T \cap R^i$ such that L^i is also ρ^i -structured. Additionally, every subrectangle $L' \subseteq L^i$ of density $\geq 1/4$ is also ρ^i -structured.
- **Error case:** R^i is covered by error rows/columns, i.e., $R^i \subseteq X_{\text{err}} \times \{0, 1\}^{mn} \cup [m]^n \times Y_{\text{err}}$.

Finally, a **query alignment** property holds: for every $x \in [m]^n \setminus X_{\text{err}}$, there exists a subset $I_x \subseteq [n]$ with $|I_x| \leq O(k/\log n)$ such that every “structured” R^i intersecting $\{x\} \times \{0, 1\}^{mn}$ has $\text{fix } \rho^i \subseteq I_x$.

6.2 Simplified proof

As in the rectangle case, we give a simplified proof assuming no errors. That is, invoking **Triangle Scheme** for each triangle T involved in Π , we assume that


(†) *Assumption:* All rectangles in the cover $\bigsqcup_i R^i \supseteq T$ output by **Triangle Scheme** satisfy the “structured” case of **Triangle Lemma** for $k := 2d \log n$.

The argument for getting rid of the assumption (†) is the same as in the rectangle case, and hence we omit that step—one only needs to observe that removing cumulative error rows/columns from a triangle still leaves us with a triangle.

Overview. As before, we extract a width- $O(d)$ Explorer-strategy for S by walking down the triangle-dag Π , starting at the root. For each triangle T of Π that is reached in the walk, we maintain a ρ -structured inner rectangle $L \subseteq T$. Here ρ (of width $O(d)$ by the choice of k) will record the current state of the game. There are the three steps (1)–(3) to address, of which (1) and (3) remain exactly the same as in the rectangle case. So we only explain step (2), which requires us to replace the use of **Rectangle Lemma** with the new **Triangle Lemma**.

(2) Internal step. Supposing the game has reached state ρ_L and we are maintaining some ρ_L -structured inner rectangle $L \subseteq T$ associated with an internal node v , we want to move to some $\rho_{\tilde{T}}$ -structured inner rectangle $\tilde{L} \subseteq \tilde{T}$ associated with a child of v . Moreover, we must keep the width of the game state at most $O(d)$ during this move.

Let the two triangles associated with the children of v be T_1 and T_2 , so that $L \subseteq T_1 \cup T_2$. Sort the rows and columns of L according to the order determined by the row and column labels of T_1 , and partition L accordingly into four density-1/4 quadrants $L = L_1 \cup L_2 \cup L_3 \cup L_4$ as illustrated below. (If L has an odd number of rows or columns, then the L_i may intersect one another in a single row or column.)

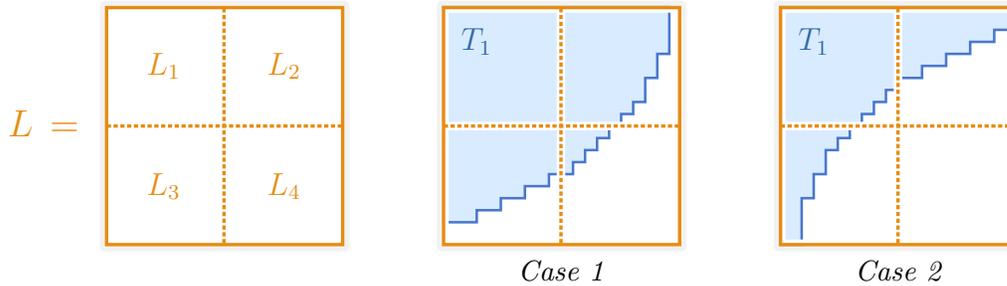

Two cases: either (1) the quadrant L_1 is contained in T_1 , or else (2) the quadrant L_4 is disjoint from T_1 , in which case $L_4 \subseteq T_2$. In either case there exists a triangle $\tilde{T} \in \{T_1, T_2\}$ and a density-1/4 subrectangle $L' := X' \times Y' \in \{L_1, L_4\}$ inside L such that $L' \subseteq \tilde{T}$. By the “structured” case of **Triangle Lemma**, we have that L' is ρ_L -structured. By **Lemma 4** there exists some $x^* \in X'$ such that $\{x^*\} \times Y'$ is ρ_L -like.

Let $\bigsqcup_i R^i$ be the rectangle cover of \tilde{T} output by **Triangle Scheme**. By query alignment in **Triangle Lemma**, there is some $I^* \subseteq [n]$, $|I^*| \leq O(d)$, such that all R^i that intersect the x^* -th row are ρ^i -structured with $\text{fix } \rho^i \subseteq I^*$. As Explorer, we now query the input bits in coordinates $J := I^* \setminus \text{fix } \rho_L$ (in any order) obtaining some response string $z_J \in \{0, 1\}^J$ from the Adversary. As a result, the state of the game becomes the extension of ρ_L by z_J , call it ρ^* , which has width $|\text{fix } \rho^*| = |\text{fix } \rho_L \cup J| \leq O(d)$.

Note that there is some $y^* \in Y'$ (and hence some $(x^*, y^*) \in L'$) such that $G(x^*, y^*)$ is consistent with ρ^* ; indeed, the whole row $\{x^*\} \times Y'$ is ρ_L -like and ρ^* extends ρ_L . In the rectangle covering of $\tilde{T} \supseteq L'$, let R be the unique part such that $(x^*, y^*) \in R$. Note that R is ρ_R -like for some ρ_R that is consistent with $G(x^*, y^*)$ and fix $\rho_R \subseteq I^*$ (by query alignment). Hence ρ^* extends ρ_R . As Explorer, we now forget all queried bits in ρ^* except those queried in ρ_R . Also we move to the inner rectangle $\tilde{L} \subseteq R$ promised by **Triangle Lemma** that satisfies $\tilde{L} \subseteq \tilde{T}$ and is $\rho_{\tilde{L}} = \rho_R$ structured.

We have recovered our invariant: the game state is $\rho_{\tilde{L}}$ and we maintain a $\rho_{\tilde{L}}$ -structured subrectangle \tilde{L} of a triangle \tilde{T} . Moreover, the width of the game state remained $O(d)$.

7 Partitioning rectangles and triangles

In this section, we prove **Rectangle Lemma**, define **Triangle Scheme**, and prove **Triangle Lemma**. We use repeatedly the following simple fact about min-entropy.

Fact 5. *Let \mathbf{X} be a random variable and E an event. Then $\mathbf{H}_\infty(\mathbf{X} \mid E) \geq \mathbf{H}_\infty(\mathbf{X}) - \log 1/\Pr[E]$.*

7.1 Proof of Rectangle Lemma

The proof is more-or-less implicit in [GLM⁺16, GPW17]. We start by recording a key property of the 1st round of **Rectangle Scheme**.

Claim 6. *Each part X^i obtained in 1st round of **Rectangle Scheme** satisfies:*

- Blockwise-density: $\mathbf{X}_{[n] \setminus I_i}^i$ is 0.95-dense.
- Relative size: $|X^{\geq i}| \leq m^{n-0.05|I_i|}$ where $X^{\geq i} := \bigcup_{j \geq i} X^j$.

Proof. By definition, $\mathbf{X}^i = (\mathbf{X}^{\geq i} \mid \mathbf{X}_{I_i}^{\geq i} = \alpha_i)$. Suppose for contradiction that $\mathbf{X}_{[n] \setminus I_i}^i$ is not 0.95-dense. Then there is some nonempty subset $K \subseteq [n] \setminus I_i$ and an outcome $\beta \in [m]^K$ violating the min-entropy condition, namely $\Pr[\mathbf{X}_K^i = \beta] > m^{-0.95|K|}$. But this contradicts the maximality of I_i since the larger set $I_i \cup K$ now violates the min-entropy condition for $\mathbf{X}^{\geq i}$:

$$\Pr[\mathbf{X}_{I_i \cup K}^{\geq i} = \alpha_i \beta] = \Pr[\mathbf{X}_{I_i}^{\geq i} = \alpha_i] \cdot \Pr[\mathbf{X}_K^i = \beta] > m^{-0.95|I_i|} \cdot m^{-0.95|K|} = m^{-0.95(|I_i \cup K|)}.$$

This shows the first property. For the second property, apply **Fact 5** for $\mathbf{X}^i = (\mathbf{X}^{\geq i} \mid \mathbf{X}_{I_i}^{\geq i} = \alpha_i)$ to find that $\mathbf{H}_\infty(\mathbf{X}^i) \geq \mathbf{H}_\infty(\mathbf{X}^{\geq i}) - 0.95|I_i| \log m$. On the other hand, since \mathbf{X}^i is fixed on I_i , we have $\mathbf{H}_\infty(\mathbf{X}^i) \leq (n - |I_i|) \log m$. Combining these two inequalities we get $\mathbf{H}_\infty(\mathbf{X}^{\geq i}) \leq (n - 0.05|I_i|) \log m$, which yields the second property. \square

Proof of Rectangle Lemma. *Identifying $Y_{\text{err}}, X_{\text{err}}$.* We define $Y_{\text{err}} := \bigcup_{i, \gamma} Y^{i, \gamma}$ subject to $|Y^{i, \gamma}| < 2^{mn-n^2}$. To bound the size of Y_{err} , we claim that there are at most $(4m)^n$ possible choices of i, γ . Indeed, each X^i is associated with a unique pair $(I_i \subseteq [n], \alpha_i \in [m]^{I_i})$, and there are at most 2^n choices of I_i and at most m^n choices of corresponding α_i . Also, for each X^i , there are at most 2^n possible assignments to $\gamma \in \{0, 1\}^{I_i}$. For each i, γ , we add at most 2^{mn-n^2} columns to Y_{err} . Thus, Y_{err} has density at most $(4m)^n \cdot 2^{-n^2} < 2^{-k}$ inside $\{0, 1\}^{mn}$.

We define $X_{\text{err}} := \bigsqcup_i X^i$ subject to $|I_i| > 20k/\log m$. Let i be the least index with $|I_i| > 20k/\log m$ so that $X_{\text{err}} \subseteq X^{\geq i}$. By **Claim 6**, $|X^{\geq i}| \leq m^{n-0.05|I_i|} < m^n \cdot 2^{-k}$ since $|I_i| > 20k/\log m$. In other words, $X^{\geq i}$, and hence X_{err} , has density at most 2^{-k} inside $[m]^n$.

Structured vs. error. Let $R^{i, \gamma} := X^i \times Y^{i, \gamma}$, where X_i is associated with (I_i, α_i) , be a rectangle not contained in the error rows/columns. By definition of $X_{\text{err}}, Y_{\text{err}}$, this means $|Y^{i, \gamma}| \geq 2^{mn-n^2}$ (so

Triangle Scheme

Input: Triangle $T \subseteq [m]^n \times \{0, 1\}^{mn}$ with labeling functions (a_T, b_T)

Output: A disjoint rectangle cover $\bigsqcup_i R^i \supseteq T$

- 1: $Y_{\text{err}} \leftarrow$ **Column Cleanup** on T
 - 2: Initialize $\mathcal{R}_{\text{alive}}^0 := \{[m]^n \times (\{0, 1\}^{mn} \setminus Y_{\text{err}})\}$; $\mathcal{R}_{\text{alive}}^r := \emptyset$ for all $r \geq 1$; $\mathcal{R}_{\text{final}} := \emptyset$
 - 3: **loop** for $r = 0, 1, 2, \dots$, rounds until $\mathcal{R}_{\text{alive}}^r$ is empty:
 - 4: **for all** $R \in \mathcal{R}_{\text{alive}}^r$ **do**
 - 5: $\bigsqcup_i R^i \leftarrow$ **Rectangle Scheme** on R relative to free coordinates
 - 6: **for all** parts R^i **do**
 - 7: **if** $|X^{T \cap R^i}| \geq |X^{R^i}|/2$ **then**
 - 8: Add R^i to $\mathcal{R}_{\text{final}}$
 - 9: **else**
 - 10: $R^{i, \text{top}} :=$ top half of R^i according to a_T (in particular $T \cap R^i \subseteq R^{i, \text{top}}$)
 - 11: Add $R^{i, \text{top}}$ to $\mathcal{R}_{\text{alive}}^{r+1}$ subject to $T \cap R^{i, \text{top}} \neq \emptyset$
 - 12: **return** $\mathcal{R}_{\text{final}} \cup \{[m]^n \times Y_{\text{err}}\}$
-

that $\mathbf{H}_{\infty}(\mathbf{Y}^{i, \gamma}) \geq mn - n^2$) and $|I_i| \leq 20k/\log m$. We have from [Claim 6](#) that $\mathbf{X}_{[n] \setminus I_i}^i$ is 0.95-dense. Hence, $R^{i, \gamma}$ is ρ^i -structured where ρ^i equals γ on I_i and consists of stars otherwise. Moreover, consider any density-1/2 subrectangle $R' := X' \times Y' \subseteq R^{i, \gamma}$. By [Fact 5](#), the min-entropies of \mathbf{X}'_J (for $J \subseteq [n]$) and \mathbf{Y}' can only be 1 bit smaller than the min-entropies of \mathbf{X}_J^i , $\mathbf{Y}^{i, \gamma}$. It follows that $\mathbf{X}'_{[n] \setminus I_i}$ is 0.9-dense, and $\mathbf{H}_{\infty}(\mathbf{Y}') \geq mn - n^2 - 1 > mn - n^3$. That is, R' is also ρ^i -structured.

Query alignment. For each $x \in [m]^n \setminus X_{\text{err}}$, we define $I_x = I_i$ where X^i is the unique part that contains x . It follows that any ρ -structured rectangle that intersects the x -th row is of the form $X^i \times Y^{i, \gamma}$ and hence has $\text{fix } \rho = I_i$. Since $X^i \not\subseteq X_{\text{err}}$, we have $|I_i| \leq O(k/\log n)$.

7.2 Definition of Triangle Scheme

In the description of [Triangle Scheme](#), we denote projections of a set $S \subseteq [m]^n \times \{0, 1\}^{mn}$ by

$$\begin{aligned} X^S &:= \{x \in [m]^n : \exists y \in \{0, 1\}^{mn} \text{ such that } (x, y) \in S\}, \\ Y^S &:= \{y \in \{0, 1\}^{mn} : \exists x \in [m]^n \text{ such that } (x, y) \in S\}. \end{aligned}$$

Overview. [Triangle Scheme](#) computes a disjoint rectangle cover $\bigsqcup_i R^i$ of T . Starting with a trivial cover of the whole communication domain by a single part, the algorithm progressively *refines* this cover over several rounds as guided by the input triangle T . As outlined in [Section 6.1](#), the goal is to end up with ρ -structured rectangles R^i that contain a large enough portion of T so that we may sandwich $L^i \subseteq T \cap R^i \subseteq R^i$ where L^i is a ρ -structured “inner” rectangle.

The main idea is as follows. The algorithm maintains a pool of *alive* rectangles. In a single round, for each alive rectangle R , we first invoke [Rectangle Scheme](#) in order to restore ρ -structuredness for the resulting subrectangles R^i . Then for each R^i we check if the subtriangle $T \cap R^i$ occupies at least half the rows of R^i . If *yes*, we add it to the *final* pool, which will eventually form the output of the algorithm. If *no*, we discard the “lower” half of R^i as determined by the labeling a_T , that is, the half that does not intersect T . The “top” half (containing $T \cap R^i$) will enter the alive pool for next round.

Column Clean-up

Input: Triangle $T \subseteq [m]^n \times \{0, 1\}^{mn}$ with labeling functions (a_T, b_T)

Output: Error columns $Y_{\text{err}} \subseteq \{0, 1\}^{mn}$

- 1: $Y_{\text{err}} \leftarrow \emptyset$
 - 2: For $I \subseteq [n]$, $\alpha \in [m]^I$, $\gamma \in \{0, 1\}^I$, define $Y_{I, \alpha, \gamma} := \{y \in \{0, 1\}^{mn} : g^I(\alpha, y_I) = \gamma\}$
 - 3: **while** there exists I, α, γ, x such that $0 < |T \cap (\{x\} \times (Y_{I, \alpha, \gamma} \setminus Y_{\text{err}}))| < 2^{mn-n^2}$ **do**
 - 4: $Y_{\text{err}} \leftarrow Y_{\text{err}} \cup Y^{T \cap (\{x\} \times Y_{I, \alpha, \gamma})}$
 - 5: **return** Y_{err}
-

Column Cleanup. One detail is the subroutine **Column Cleanup**, run at the start of **Triangle Scheme**, which computes a small set of columns that will eventually be declared as Y_{err} . By discarding the columns Y_{err} , we ensure that whatever subrectangle R^i is output by **Rectangle Scheme**, the rows of $T \cap R^i$ will satisfy an *empty-or-weighty dichotomy*: for every $x \in X^{R^i}$, the x -th row of $T \cap R^i$ is either empty, or “weighty”, that is, of size at least 2^{mn-n^2} . Having many weighty rows helps towards satisfying the 3rd item in **Definition 1** of ρ -structuredness, and hence in finding the inner rectangle L^i . This property of **Column Cleanup** is formalized in **Claim 7** below.

Free coordinates. Another detail to explain is the underlined phrase *relative to free coordinates*. For each alive rectangle R we tacitly associate a subset of *free coordinates* $J_R \subseteq [n]$ and *fixed coordinates* $[n] \setminus J_R$. At start, the single alive rectangle has $J_R := [n]$, and whenever we invoke **Rectangle Scheme** for a rectangle R *relative to free coordinates*, the understanding is that in line (i) of **Rectangle Scheme**, the choice of I_i is made among subsets of J_R alone. The resulting subrectangle $R^i = X^i \times Y^i$, obtained by fixing the coordinates I_i in X^i , will have its free coordinates $J_{R^i} := J_R \setminus I_i$. (Restricting a rectangle to its top half on line 10 does not modify the free coordinates.)

7.3 Properties of Triangle Scheme

Claim 7. *For a triangle $T \subseteq [m]^n \times \{0, 1\}^{mn}$, let Y_{err} be the output of **Column Cleanup**. Then:*

- Empty-or-weighty: *For every triple $(I \subseteq [n], \alpha \in [m]^I, \gamma \in \{0, 1\}^I)$, and every $x \in [m]^n$, it holds that $T \cap (\{x\} \times (Y_{I, \alpha, \gamma} \setminus Y_{\text{err}}))$ is either empty or has size at least 2^{mn-n^2} .*
- Size bound: $|Y_{\text{err}}| \leq 2^{mn-\Omega(n^2)}$.

Proof. The first property is immediate by definition of **Column Cleanup**. For the second property, in each while-iteration, at most 2^{mn-n^2} columns get added to Y_{err} . Moreover, there are no more than $2^n \cdot m^n \cdot 2^n \cdot m^n = (2m)^{2n}$ choices of $I \subseteq [n]$, $\alpha \in [m]^I$, $\gamma \in \{0, 1\}^I$ and $x \in [m]^n$, and the loop executes at most once for each choice of I, α, γ, x . Thus, $|Y_{\text{err}}| \leq (2m)^{2n} \cdot 2^{mn-n^2} \leq 2^{mn-\Omega(n^2)}$. \square

Next, we list some key invariants that hold for **Triangle Scheme**.

Lemma 8. *For every $r \geq 0$, there exists a partition $\mathcal{X}^r := \{X^i\}_i$ of $[m]^n$ satisfying the following.*

- (P1) *For every $R \in \mathcal{R}_{\text{alive}}^r$ we have $X^R \in \mathcal{X}^r$.*
- (P2) *Each $X^i \in \mathcal{X}^r$ is labeled by a pair $(I_i \subseteq [n], \alpha_i \in [m]^{I_i})$ such that $\mathbf{X}_{I_i}^i = \alpha_i$ is fixed.*
- (P3) *The partition \mathcal{X}^{r+1} is a refinement of \mathcal{X}^r . The labels respect this: if $X^j \in \mathcal{X}^{r+1}$ is a subset of $X^i \in \mathcal{X}^r$, then $I_j \supseteq I_i$ and α_j agrees with α_i on coordinates I_i .*

Moreover, let $\mathcal{X} := \mathcal{X}^{r^*}$ be the final partition assuming **Triangle Scheme** completes in r^* rounds.

- (P4) For every $R \in \mathcal{R}_{\text{final}}$ the row set X^R is a union of parts of \mathcal{X} . If $X^i \in \mathcal{X}$, labeled (I_i, α_i) , is such that $X^R \supseteq X^i$, then the fixed coordinates of R are a subset of I_i .
- (P5) For every $r \geq 0$, \mathcal{X}^r and \mathcal{X} agree on a fraction $\geq 1 - 2^{-r}$ of rows, that is, there is a subset of “final” parts $\mathcal{X}_{\text{final}}^r \subseteq \mathcal{X}^r$ such that $\bigcup \mathcal{X}_{\text{final}}^r$ has density $\geq 1 - 2^{-r}$ inside $[m]^n$, and $\mathcal{X}_{\text{final}}^r \subseteq \mathcal{X}$.

Proof. Let us define the row partitions \mathcal{X}^r . The partition \mathcal{X}^1 contains only a single part, $[m]^n$, labeled by $I_1 := \emptyset$. Supposing \mathcal{X}^r has been defined, the next partition \mathcal{X}^{r+1} is obtained by refining each old part $X^i \in \mathcal{X}^r$. Consider one such old part $X^i \in \mathcal{X}^r$ with label (I_i, α_i) . If there is no rectangle $R \in \mathcal{R}_{\text{alive}}^r$ with $X^R = X^i$ then we need not partition X^i any further; we simply include X^i in \mathcal{X}^{r+1} as a whole. Otherwise, let $R \in \mathcal{R}_{\text{alive}}^r$ be any rectangle such that $X^R = X^i$; we emphasize that there can be many such choices for R , but the upcoming refinement of X^i will not depend on that choice. The r -th round of the algorithm first computes $R = \bigsqcup_i R^i$ using **Rectangle Scheme**, and then each R^i might be horizontally split in half. We interpret this as a refinement of X^i according to the 1st round of **Rectangle Scheme** on R (which only depends on $X^R = X^i$), with each part adding more fixed coordinates to the label (I_i, α_i) . Letting $X^i = \bigsqcup_j X^{i,j}$ denote the resulting row partition, we then split each $X^{i,j}$ into two halves $X^{i,j,\text{top}}$ and $X^{i,j,\text{bot}}$. This completes the definition of \mathcal{X}^{r+1} .

The properties (P1)–(P5) are straightforward to verify. For (P5), we only note that when the algorithm horizontally splits a rectangle (inducing $X^{i,j} = X^{i,j,\text{top}} \cup X^{i,j,\text{bot}}$), the bottom halves are discarded, and never again touched in future rounds. That is, $X^{i,j,\text{bot}} \in \mathcal{X}^{r'}$ for all $r' > r$. This cuts the number of “alive” rows $\bigcup_{R \in \mathcal{R}_{\text{alive}}^r} X^R$ in half each round. \square

Lemma 9 (Error rows). *Let $\mathcal{X} = \{X^i\}_i$ be the final row partition in Lemma 8. Fix any parameter $k < n \log n$. There is a density- 2^{-k} subset $X_{\text{err}} \subseteq [m]^n$ (which is a union of parts of \mathcal{X}) such that for any part $X^i \not\subseteq X_{\text{err}}$, we have $|I_i| \leq O(k/\log n)$.*

Proof. Our strategy is as follows (cf. [GPW17, Lemma 7]). For $x \in [m]^n$, let $i(x)$ be the unique index such that $x \in X^{i(x)} \in \mathcal{X}$; recall that $X^{i(x)}$ is labeled by some $(I_{i(x)}, \alpha_{i(x)})$. We will study a uniform random $\mathbf{x} \sim [m]^n$ and show that the distribution of the number of fixed coordinates $|I_{i(\mathbf{x})}|$ has an exponentially decaying tail. This allows us to define X_{err} as the set of outcomes of \mathbf{x} for which $|I_{i(\mathbf{x})}|$ is exceptionally large. More quantitatively, it suffices to show for a large constant C ,

$$\Pr[|I_{i(\mathbf{x})}| > C \cdot k/\log n] \leq 2^{-k}. \quad (2)$$

Recall that \mathcal{X} and \mathcal{X}^ℓ , where $\ell := k + 1$, agree on all but a fraction $2^{-k}/2$ of rows by (P5). Hence by a union bound, it suffices to show a version of (2) truncated at level ℓ :

$$\Pr[|I_{i'(\mathbf{x})}| > C' \cdot \ell/\log n] \leq 2^{-\ell} \quad (= 2^{-k}/2), \quad (3)$$

where $i'(x)$ is defined as the unique index with $x \in X^{i'(x)} \in \mathcal{X}^\ell$.

Partitions as a tree. The sequence $\mathcal{X}^0, \dots, \mathcal{X}^\ell$, of row partitions can be visualized as a depth- ℓ tree where the nodes at depth r corresponds to parts of \mathcal{X}^r , and there is an edge from $X \in \mathcal{X}^r$ to $X' \in \mathcal{X}^{r+1}$ iff $X' \subseteq X$. A way to generate a uniform random $\mathbf{x} \sim [m]^n$ is to take a random walk down this tree, starting at the root:

- At a non-leaf node $X \in \mathcal{X}^r$ we take a tree edge (X, X') with probability $|X'|/|X|$.
- Once at a leaf node $X \in \mathcal{X}^\ell$, we output a uniform random $\mathbf{x} \sim X$.

Potential function. We define a nonnegative potential function on the nodes of the tree. For each part $X \in \mathcal{X}^r$, labeled $(I \subseteq [n], \alpha \in \{0, 1\}^I)$, we define

$$D(X) := (n - |I|) \log m - \log |X| \geq 0.$$

How does the potential change as we take a step starting at node $X \in \mathcal{X}^r$ labeled (J, α) ? If X has one child, the value of D remains unchanged. Otherwise, we move to a child of X in two substeps.

- *Substep 1:* Recall that we partition $X = \bigsqcup_i X^i$ according to the 1st round of **Rectangle Scheme** relative to free coordinates. That is, X^i is further restricted on $I_i \subseteq [n] \setminus J$ to some value $\alpha_i \in [m]^{I_i}$. For a child X^i labeled $(J \sqcup I_i, \alpha \sqcup \alpha_i)$ the potential change is

$$\begin{aligned}
D(X^i) - D(X) &= (n - |J \cup I_i|) \log m - \log |X^i| - (n - |J|) \log m + \log |X| \\
&= \log |X| - \log |X^i| - |I_i| \log m \\
&= \log(|X|/|X^{\geq i}|) - \log(|X^i|/|X^{\geq i}|) - |I_i| \log m \\
&= \log(|X|/|X^{\geq i}|) - \log \Pr[\mathbf{X}_{I_i}^{\geq i} = \alpha_i] - |I_i| \log m \\
&\leq \log(|X|/|X^{\geq i}|) + 0.95|I_i| \log m - |I_i| \log m \\
&= \delta(i) - 0.05|I_i| \log m. \quad (\text{where } \delta(i) := \log(|X|/|X^{\geq i}|))
\end{aligned}$$

- *Substep 2:* Each X^i gets split into two halves, $X^{i,\text{top}}$ and $X^{i,\text{bot}}$. Moving to either child makes the potential increase by exactly 1 bit.

In summary, when we take a step to a random child in our random walk, the overall change in potential is itself a random variable, which is at most

$$\delta - 0.05|\mathbf{I}| \log m + 1, \quad (4)$$

where (\mathbf{I}, \cdot) is the label of the random child, and $\delta := \delta(\mathbf{i})$ is the random variable generated by choosing \mathbf{i} with $\Pr[\mathbf{i} = i] = |X^i|/|X|$. Summing (4) over ℓ many rounds, we see that ℓ steps of the random walk takes us to a node $X^{\mathbf{j}} \in \mathcal{X}^\ell$ with random index \mathbf{j} , which is labeled $(I_{\mathbf{j}}, \alpha_{\mathbf{j}})$, and which satisfies $D(X^{\mathbf{j}}) \leq \sum_{r \in [\ell]} (\delta_r + 1) - 0.05|I_{\mathbf{j}}| \log m$ where δ_r is the “ δ ” variable corresponding to the r -th step. Since the potential is nonnegative, we get that

$$|I_{\mathbf{j}}| \leq \frac{20}{\log n} \cdot \sum_{r \in [\ell]} (\delta_r + 1). \quad (5)$$

Bounding this quantity is awkward since, in general, the variables δ_r are not mutually independent. However, a standard trick to overcome this is to define mutually independent random variables \mathbf{d}_r and couple them with δ_r so that $\delta_r \leq \mathbf{d}_r$ with probability 1.

- *Definition of \mathbf{d}_r :* Sample a uniform real $\mathbf{p}_r \in [0, 1)$ and define $\mathbf{d}_r := \log(1/(1 - \mathbf{p}_r))$ and let $\delta_r := \delta(\mathbf{i})$ where \mathbf{i} is such that \mathbf{p}_r falls in the \mathbf{i} -th interval, assuming we have partitioned $[0, 1)$ into half-open intervals with lengths $|X^i|/|X|$ (where X^1, X^2, \dots are the sets from Substep 1) in the natural left-to-right order. Now δ_r is correctly distributed and $\delta_r \leq \mathbf{d}_r$ with probability 1.

Note that $\mathbf{E}[2^{\mathbf{d}_j/2}] = \int_0^1 p/(1-p)^{1/2} dp = 4/3 \leq 2$. For a large enough constant $C > 0$, we calculate

$$\begin{aligned}
\Pr\left[\sum_{r \in [\ell]} \mathbf{d}_r > C\ell\right] &= \Pr\left[2^{\sum_{r \in [\ell]} (\mathbf{d}_r/2)} > 2^{C\ell/2}\right] \\
&\leq \mathbf{E}\left[2^{\sum_{r \in [\ell]} (\mathbf{d}_r/2)}\right] / 2^{C\ell/2} \\
&= \left(\prod_{r \in [\ell]} \mathbf{E}\left[2^{\mathbf{d}_r/2}\right]\right) / 2^{C\ell/2} \\
&\leq 2^\ell / 2^{C\ell/2} \\
&\leq 2^{-C\ell/3}.
\end{aligned}$$

Plugging this estimate in (5) (using $\delta_r \leq \mathbf{d}_r$) we get that $\Pr[|I_{\mathbf{j}}| > C' \cdot \ell / \log n] < 2^{-\ell}$ for a sufficiently large C' . This proves (3) and concludes the proof of the lemma. \square

7.4 Proof of Triangle Lemma

Identifying $Y_{\text{err}}, X_{\text{err}}$. The column error set Y_{err} is already defined by [Triangle Scheme](#). Note that only one rectangle, $[m]^n \times Y_{\text{err}}$, is covered by the error columns. [Claim 7](#) ensures that Y_{err} has density at most $2^{-\Omega(n^2)} < 2^{-k}$. The row error set X_{err} is defined by [Lemma 9](#) (for the given k).

Structured vs. error. Let $\sqcup_i R^i$ be the output of [Triangle Scheme](#), and consider an $R^i = X^i \times Y^i$ which is not covered by error rows/columns; in particular $R^i \in \mathcal{R}_{\text{final}}$. Let $I_i \subseteq [n]$ denote the fixed coordinates of R^i such that $\mathbf{X}_{I_i}^i = \alpha_i$ for some $\alpha_i \in \{0, 1\}^{I_i}$. From [Claim 6](#) we have that $\mathbf{X}_{[n] \setminus I_i}^i$ is 0.95-dense. From [\(P4\)](#) and [Lemma 9](#) we have $|I_i| \leq O(k/\log n)$. Moreover, we observe that $Y^i = Y_{I_i, \alpha_i, \gamma_i} \setminus Y_{\text{err}}$ for some $\gamma_i \in \{0, 1\}^{I_i}$ (notation from [Column Cleanup](#)) since [Rectangle Scheme](#), and hence [Triangle Scheme](#) by extension, only partitions columns by fixing individual gadget outputs. We have $|Y_{I_i, \alpha_i, \gamma_i}| \geq 2^{mn-n}$ by definition, and so $|Y^i| \geq 2^{mn-2n}$ is large enough: we conclude that R^i is ρ^i -structured for ρ^i that equals γ_i on I_i and consists of stars otherwise.

Next, we locate the associated inner rectangle $L^i \subseteq R^i$. All final rectangles output by [Triangle Scheme](#) are such that $|X^{(T \cap R^i)}| \geq |X^i|/2$. That is, every top row in $R^{i, \text{top}}$ has a nonempty intersection with T . Hence the empty-vs-weighty property of [Claim 7](#) says that for all $x \in X^{i, \text{top}}$, we have $|T \cap (\{x\} \times Y^i)| \geq 2^{mn-n^2}$. Moreover, note that $\mathbf{X}^{i, \text{top}}$ is 0.94-dense on its free coordinates $[n] \setminus I_i$ (we lose 1 bit of min-entropy compared to \mathbf{X}^i by [Fact 5](#)). We can now define $L^i := X^{i, \text{top}} \times Y' \subseteq T \cap R^i$ where Y' is the set of the first (according to b_T) 2^{mn-n^2} columns of Y^i ; see [Figure 4](#). This L^i meets all the conditions for being ρ^i -structured.

Moreover, consider any density-1/4 subrectangle $L' \subseteq L^i$. Such an L' is still ρ^i -structured, since, by [Fact 5](#) we only lose at most 2 bits of min-entropy (which we can afford) in the relevant parameters for L' as compared to L^i .

Query alignment. For $x \in [m]^n \setminus X_{\text{err}}$, we define (I_x, α_x) as the label of the unique part $i(x)$ such that $x \in X^{i(x)} \in \mathcal{X}$. By [Lemma 9](#), $|I_x| \leq O(k/\log n)$. Every ρ -structured rectangle $R^j := X^j \times Y^j$ with $X^j \supseteq X^{i(x)}$ is, by [\(P4\)](#), such that $\text{fix } \rho \subseteq I_x$.

8 Translating between mKW/CNF

In this section, for exposition, we recall some known reductions between mKW and CNF search problems. These reductions can be combined with our main theorems to yield applications in proof and monotone circuit complexity (as outlined in [Section 3](#)).

Certificates. The key property of an n -bit search problem $S \subseteq \{0, 1\}^n \times \mathcal{O}$ that facilitates an efficient reduction to a mKW/CNF search problem is having a low *certificate* (aka nondeterministic) complexity. A *certificate for $(x, o) \in S$* is a partial assignment $\rho \in \{0, 1, *\}^n$ such that x is consistent with ρ and o is a valid output for every input consistent with ρ ; in short, $x \in C_\rho^{-1}(1) \subseteq S^{-1}(o)$. A *certificate for x* is a certificate for $(x, o) \in S$ for some $o \in S(x)$. The *certificate complexity of x* is the least width of a certificate for x . The *certificate complexity of S* is the maximum over all $x \in \{0, 1\}^n$ of the certificate complexity of x .

For any search problem S one can associate a ‘‘certification’’ search problem S_{cert} : on input x to S , output a certificate for x in S . Algorithmically speaking, such an S_{cert} is clearly at least as hard as S : if we solve S_{cert} by finding a certificate for $(x, o) \in S$, we can solve S by outputting o .

CNF search \Leftrightarrow low certificate complexity. For any k -CNF contradiction F , the associated CNF search problem S_F has certificate complexity at most k . Conversely [[LNNW95](#)], for any

total search problem $S \subseteq \{0, 1\}^n \times \mathcal{O}$, we can construct a k -CNF contradiction F , where k is the certificate complexity of S , such that S_F is a type of certification problem for S (and hence at least as hard as S). Namely, we can pick a collection \mathcal{C} of width- k certificates, one for each $x \in \{0, 1\}^n$. The k -CNF formula F is then defined as $\bigwedge_{\rho \in \mathcal{C}} \neg C_\rho$.

Gadget composition. For the purposes of query complexity, there are two ways to represent the first argument $x \in [m]$ to the index function $\text{IND}_m: [m] \times \{0, 1\}^m$ as a binary string. The simplest is to write x as a $\log m$ -bit string. Under this convention, IND_m has certificate complexity $\log m + 1$. If $S \subseteq \{0, 1\}^n \times \mathcal{O}$ has certificate complexity k , the composed problem $S \circ \text{IND}_m^n$ has certificate complexity $k(\log m + 1)$ (by composing certificates). For applications, this means that if we start with a k -CNF contradiction F , we may reduce $S_F \circ \text{IND}_m^n$ to solving $S_{F'}$ where F' is a $k(\log m + 1)$ -CNF contradiction over $O(mn)$ variables.

A better representation [BHP10, dRNV16], which does not blow up the certificate complexity (or CNF width), is to write x as an m -bit string of Hamming weight 1 (the index of the unique 1-entry encodes $x \in [m]$). Under this convention, $\text{IND}_m^n: \{0, 1\}^m \times \{0, 1\}^m \rightarrow \{0, 1\}$ becomes a *partial* function of certificate complexity 2. Hence, if S has certificate complexity k , the *partial* composed problem $S' := S \circ \text{IND}_m^n$ has certificate complexity $2k$.

Moreover, the partial problem S' can be extended into a *total* problem S_{tot} without making it any easier to solve for rectangle-dags. Indeed, we introduce new variables/certificates allowing us to say that an input (x, y) to S' is trivially solved with output $\perp \notin \mathcal{O}$, if for some $i \in [n]$, $x_i \in \{0, 1\}^m$ is *not* of Hamming weight 1. Specifically, Alice will receive new input bits $x' \in (\{0, 1\}^m)^n$ (in addition to the original $x \in (\{0, 1\}^m)^n$) and we say that an Alice input xx' is *good* if for each $i \in [n]$, the string $x'_i \in \{0, 1\}^m$ describes a non-decreasing sequence

$$0 = x'_{i,1} \leq x'_{i,2} \leq \dots \leq x'_{i,m} \leq x'_{i,m+1} := 1$$

(the last value being hardcoded by convention), and moreover $x_{i,j} = 1$ iff $x'_{i,j} < x'_{i,j+1}$. Note that if xx' is *not* good, there is a width-3 certificate witnessing this. Our total search problem $S_{\text{tot}} \subseteq \{0, 1\}^{2mn} \times \{0, 1\}^{mn} \times (\mathcal{O} \cup \{\perp\})$ is defined by all these width-3 certificates (for output \perp) together with all the original certificates of S' . To see that S_{tot} is at least as hard as S' for rectangle-dags, we note that for any input (x, y) to S' , Alice can compute a unique x' so that xx' is *good*. Now any output $o \in S_{\text{tot}}(xx', y)$ is also such that $o \in S'(x, y)$.

In summary, we can reduce (in the context of rectangle-dags) $S_F \circ \text{IND}_m^n$ to solving $S_{F'}$ where F' is a $2k$ -CNF contradiction over $O(mn)$ variables.

mKW problems. A rectangle $R \subseteq \mathcal{X} \times \mathcal{Y}$ is *monochromatic* for a search problem $S \subseteq \mathcal{X} \times \mathcal{Y} \times \mathcal{O}$ if $R \subseteq S^{-1}(o)$ for some $o \in \mathcal{O}$. The nondeterministic communication complexity of S is the logarithm of the least number of monochromatic rectangles that cover the whole input domain $\mathcal{X} \times \mathcal{Y}$. If S has nondeterministic communication complexity $\log N$, then by a standard reduction (e.g., [Gal01, Lemma 2.3]) S reduces to S_f for some monotone $f: \{0, 1\}^N \rightarrow \{0, 1\}$.

Consider a composed search problem $S_F \circ g^n$ obtained from a k -CNF contradiction with ℓ clauses. Its nondeterministic communication complexity is at most $\log \ell + k \cdot (\log m + 1)$; intuitively, it takes $\log \ell$ bits to specify an unsatisfied clause C , and $\log m + 1$ bits to verify the output of a single gadget, and there are k gadgets relevant to C . Suppose for a moment that a version of [Theorem 1](#), proving a $2^{\Omega(w)}$ lower bound, held for a gadget of constant size $m = O(1)$. Then we could lift any of the known CNF contradictions with parameters $k = O(1)$, $\ell = O(n)$, $w = \Omega(n)$, to obtain an explicit monotone function on $N = \Theta(n)$ variables, with essentially maximal monotone circuit complexity $2^{\Omega(N)}$. This gives some motivation to further develop lifting tools for small gadgets.

9 Open problems

If the long line of work on *tree-like* lifting theory is of any indication, there should be much to explore also in the *dag-like* setting. We propose a few concrete directions.

Can our methods be extended to prove lower bounds for dags whose feasible sets are *intersections of k triangles* for $k \geq 2$? See [Figure 2](#). This would imply lower bounds for proofs systems such as width- k Resolution over Cutting Planes [[Kra98](#)] and Resolution over linear equations [[RT08](#), [IS14](#)].

Question 1. *Prove a lifting theorem for \mathcal{F} -dags where $\mathcal{F} := \{\text{intersections of } k \text{ triangles}\}$.*

One of the most important open problems (e.g., [[Raz16b](#), §5]) regarding semi-algebraic proof systems that manipulate low-degree polynomials—where \mathcal{F} is, say, degree- d polynomial threshold functions—is to prove lower bounds on their *dag-like* refutation length (*tree-like* lower bounds are known [[BPS07](#), [GP14](#)]). Since degree- d polynomials can be efficiently evaluated by $(d + 1)$ -party number-on-forehead (NOF) protocols, one might hope to prove a dag-like NOF lifting theorem. However, we currently lack a good understanding of NOF lifting even in the tree-like case. We believe the first necessary step should be to settle the following (a two-party analogue of which was proved in [[GLM⁺16](#)]).

Question 2. *Prove a nondeterministic lifting theorem for NOF protocols.*

The proof of [Theorem 1](#), which extracts a width- $O(d)$ conjunction-dag from a size- n^d rectangle-dag, has the additional property of preserving the dag *depth* (up to an $O(d)$ factor). This raises the question of whether one could investigate size–depth tradeoffs for monotone circuits via lifting.

Question 3. *Does there exist, for any $d \geq 1$, an $f: \{0, 1\}^n \rightarrow \{0, 1\}$ computable with monotone circuits of size n^d such that any subexponential-size monotone circuit computing f has depth $n^{\Omega(d)}$?*

Razborov [[Raz16a](#)] has recently obtained related results for Resolution, but the parameters in his construction seem not to be good enough for a direct application of [Theorem 1](#).

A Appendix: Proof of [Lemma 4](#)

Define $\chi(z) := (-1)^{\sum_i z_i}$. To prove [Lemma 4](#), we recall two claims from [[GPW17](#)] (which were used to prove [Lemma 3](#)). We need the first claim in a slightly strengthened form.

Claim 10 (Strengthening [[GPW17](#), §4.2]). *For any ρ -structured $X \times Y$ with free $\rho =: J \subseteq [n]$,*

$$\forall I \subseteq J, I \neq \emptyset : \quad \mathbf{E}_X \left| \mathbf{E}_Y [\chi(g^I(\mathbf{X}_I, \mathbf{Y}_I))] \right| \leq 2^{-5|I| \log n}.$$

Proof. Fix any $I \subseteq J, I \neq \emptyset$. Define subsets

$$X^+ := \{x \in X : \mathbf{E}_Y [\chi(g^I(x_I, \mathbf{Y}_I))] > 0\} \quad \text{and} \quad X^- := \{x \in X : \mathbf{E}_Y [\chi(g^I(x_I, \mathbf{Y}_I))] < 0\}$$

so that

$$\mathbf{E}_X \left| \mathbf{E}_Y [\chi(g^I(x_I, \mathbf{Y}_I))] \right| = \frac{|X^+|}{|X|} \cdot \mathbf{E}_{\mathbf{X}^+} \mathbf{E}_Y [\chi(g^I(\mathbf{X}_I^+, \mathbf{Y}_I))] + \frac{|X^-|}{|X|} \cdot \mathbf{E}_{\mathbf{X}^-} \mathbf{E}_Y [-\chi(g^I(\mathbf{X}_I^-, \mathbf{Y}_I))] .$$

It suffices to show that each of the two terms is at most $0.5 \cdot 2^{-5|I| \log n}$. Let us focus only on the first term (a similar argument takes care of the second term). If $|X^+| \leq 0.5 \cdot 2^{-5|I| \log n} \cdot |X|$, then we are already done, so assume the contrary so that $\mathbf{H}_\infty(\mathbf{X}_I^+) \geq \mathbf{H}_\infty(\mathbf{X}_I) - 5|I| \log n - 1 \geq 0.8|I| \log m$;

here recall that $\mathbf{H}_\infty(\mathbf{X}_I) \geq 0.9|I| \log m$ and we may assume $m \geq n^{60}$. To complete the proof, we rely on a calculation from [GPW17, §4.2]. There, the following is proved for constant 0.9 in place of 0.8, but this is inconsequential, as one can always increase the exponent in $m = n^\delta$ if necessary.

Calculation from [GPW17, §4.2]: If $\mathbf{H}_\infty(\mathbf{X}_I^+) \geq 0.8|I| \log m$ and $\mathbf{H}_\infty(\mathbf{Y}) \geq mn - n^3$ then

$$|\mathbf{E}_{\mathbf{X}^+} \mathbf{E}_{\mathbf{Y}}[\chi(g^I(\mathbf{X}_I^+, \mathbf{Y}_I))]| \leq 0.5 \cdot 2^{-5|I| \log n}. \quad \square$$

Claim 11 ([GPW17, §4.6]). *If a random variable z_J over $\{0, 1\}^J$ satisfies $|\mathbf{E}[\chi(z_I)]| \leq 2^{-3|I| \log n}$ for every nonempty $I \subseteq J$, then z_J has full support over $\{0, 1\}^J$.* \square

Say that $x \in X$ is *good* if $|\mathbf{E}_{\mathbf{Y}}[\chi(g^I(x_I, \mathbf{Y}_I))]| \leq 2^{-3|I| \log n}$ for all $\emptyset \neq I \subseteq J$. By applying Markov's inequality to Claim 10, we have for a uniform random $\mathbf{x} \sim X$ and any $\emptyset \neq I \subseteq J$ that

$$\Pr_{\mathbf{x} \sim X} \left[|\mathbf{E}_{\mathbf{Y}}[\chi(g^I(\mathbf{x}_I, \mathbf{Y}_I))]| > 2^{-3|I| \log n} \right] \leq 2^{-2|I| \log n}.$$

Taking a union bound over all $\emptyset \neq I \subseteq J$, we get

$$\begin{aligned} \Pr_{\mathbf{x} \sim X} [\mathbf{x} \text{ is not good}] &\leq \sum_{\emptyset \neq I \subseteq J} \Pr_{\mathbf{x} \sim X} [|\mathbf{E}_{\mathbf{Y}}[\chi(g^I(\mathbf{x}_I, \mathbf{Y}_I))]| > 2^{-3|I| \log n}] \\ &\leq \sum_{\emptyset \neq I \subseteq J} 2^{-2|I| \log n} = \sum_{d=1}^{|J|} \binom{|J|}{d} \cdot 2^{-2d \log n} \\ &\leq \sum_{d=1}^{|J|} 2^{-d \log n} \leq 2/n. \end{aligned}$$

Hence most $x \in X$ are *good*. Finally, observe that for any *good* x , the random variable z_J defined as $g^J(x, \mathbf{y})$ for a random $\mathbf{y} \sim Y$, satisfies the Fourier condition in Claim 11. Therefore, such a z_J has full support over $\{0, 1\}^J$, which means that $\{x\} \times Y$ is ρ -like.

Acknowledgements

We thank Jakob Nordström for extensive feedback on an early draft of this work. Also, thanks to Toniann Pitassi and Thomas Watson for discussions.

References

- [AB87] Noga Alon and Ravi Boppana. The monotone circuit complexity of boolean functions. *Combinatorica*, 7(1):1–22, 1987. doi:10.1007/BF02579196.
- [AD08] Albert Atserias and Víctor Dalmau. A combinatorial characterization of resolution width. *Journal of Computer and System Sciences*, 74(3):323–334, 2008. doi:10.1016/j.jcss.2007.06.025.
- [AM04] Kazuyuki Amano and Akira Maruoka. The potential of the approximation method. *SIAM Journal on Computing*, 33(2):433–447, 2004. doi:10.1137/S009753970138445X.
- [And85] Alexander Andreev. On a method for obtaining lower bounds for the complexity of individual monotone functions. *Doklady Akademii Nauk USSR*, 281(2):1033–1037, 1985.
- [BHP10] Paul Beame, Trinh Huynh, and Toniann Pitassi. Hardness amplification in proof complexity. In *Proceedings of the 42nd Symposium on Theory of Computing (STOC)*, pages 87–96. ACM, 2010. doi:10.1145/1806689.1806703.

- [BP01] Paul Beame and Toniann Pitassi. Propositional proof complexity: Past, present, and future. In *Current Trends in Theoretical Computer Science: Entering the 21st Century*, pages 42–70. World Scientific, 2001. doi:10.1142/9789812810403_0001.
- [BPR97] Maria Bonet, Toniann Pitassi, and Ran Raz. Lower bounds for cutting planes proofs with small coefficients. *The Journal of Symbolic Logic*, 62(3):708–728, 1997. doi:10.2307/2275569.
- [BPS07] Paul Beame, Toniann Pitassi, and Nathan Segerlind. Lower bounds for Lovász–Schrijver systems and beyond follow from multiparty communication complexity. *SIAM Journal on Computing*, 37(3):845–869, 2007. doi:10.1137/060654645.
- [BU99] Christer Berg and Staffan Ulfberg. Symmetric approximation arguments for monotone lower bounds without sunflowers. *Computational Complexity*, 8(1):1–20, 1999. doi:10.1007/s000370050017.
- [BW01] Eli Ben-Sasson and Avi Wigderson. Short proofs are narrow—resolution made simple. *Journal of the ACM*, 48(2):149–169, 2001. doi:10.1145/375827.375835.
- [CCT87] William Cook, Collette Coullard, and György Turán. On the complexity of cutting-plane proofs. *Discrete Applied Mathematics*, 18(1):25–38, 1987. doi:10.1016/0166-218X(87)90039-4.
- [CKLM17] Arkadev Chattopadhyay, Michal Koucký, Bruno Loff, and Sagnik Mukhopadhyay. Simulation theorems via pseudorandom properties. Technical report, arXiv, 2017. arXiv:1704.06807.
- [dRNV16] Susanna de Rezende, Jakob Nordström, and Marc Vinyals. How limited interaction hinders real communication (and what it means for proof and circuit complexity). In *Proceedings of the 57th Symposium on Foundations of Computer Science (FOCS)*, pages 295–304. IEEE, 2016. doi:10.1109/FOCS.2016.40.
- [FPPR17] Noah Fleming, Denis Pankratov, Toniann Pitassi, and Robert Robere. Random CNFs are hard for cutting planes. In *Proceedings of the 58th Symposium on Foundations of Computer Science (FOCS)*, 2017. doi:10.2307/2275569.
- [Gál01] Anna Gál. A characterization of span program size and improved lower bounds for monotone span programs. *Computational Complexity*, 10(4):277–296, 2001. doi:10.1007/s000370100001.
- [GKPW17] Mika Göös, Pritish Kamath, Toniann Pitassi, and Thomas Watson. Query-to-communication lifting for P^{NP} . In *Proceedings of the 32nd Computational Complexity Conference (CCC)*, pages 12:1–12:16. Schloss Dagstuhl, 2017. doi:10.4230/LIPIcs.CCC.2017.12.
- [GLM⁺16] Mika Göös, Shachar Lovett, Raghu Meka, Thomas Watson, and David Zuckerman. Rectangles are nonnegative juntas. *SIAM Journal on Computing*, 45(5):1835–1869, 2016. doi:10.1137/15M103145X.
- [GP14] Mika Göös and Toniann Pitassi. Communication lower bounds via critical block sensitivity. In *Proceedings of the 46th Symposium on Theory of Computing (STOC)*, pages 847–856. ACM, 2014. doi:10.1145/2591796.2591838.
- [GPW15] Mika Göös, Toniann Pitassi, and Thomas Watson. Deterministic communication vs. partition number. In *Proceedings of the 56th Symposium on Foundations of Computer Science (FOCS)*, pages 1077–1088. IEEE, 2015. doi:10.1109/FOCS.2015.70.

- [GPW17] Mika Göös, Toniann Pitassi, and Thomas Watson. Query-to-communication lifting for BPP. In *Proceedings of the 58th Symposium on Foundations of Computer Science (FOCS)*. IEEE, 2017. To appear.
- [Hak95] Armin Haken. Counting bottlenecks to show monotone $P \neq NP$. In *Proceedings of the 36th Symposium on Foundations of Computer Science (FOCS)*, pages 36–40, 1995. doi:10.1109/SFCS.1995.492460.
- [HC99] Armin Haken and Stephen Cook. An exponential lower bound for the size of monotone real circuits. *Journal of Computer and System Sciences*, 58(2):326–335, 1999. doi:10.1006/jcss.1998.1617.
- [HN12] Trinh Huynh and Jakob Nordström. On the virtue of succinct proofs: Amplifying communication complexity hardness to time–space trade-offs in proof complexity. In *Proceedings of the 44th Symposium on Theory of Computing (STOC)*, pages 233–248. ACM, 2012. doi:10.1145/2213977.2214000.
- [HP17a] Pavel Hrubeš and Pavel Pudlák. A note on monotone real circuits. Technical Report TR17-048, Electronic Colloquium on Computational Complexity (ECCC), 2017. URL: <https://eccc.weizmann.ac.il/report/2017/048/>.
- [HP17b] Pavel Hrubeš and Pavel Pudlák. Random formulas, monotone circuits, and interpolation. In *Proceedings of the 58th Symposium on Foundations of Computer Science (FOCS)*, 2017. To appear.
- [HR00] Danny Harnik and Ran Raz. Higher lower bounds on monotone size. In *Proceedings of the 32nd Symposium on Theory of Computing (STOC)*, pages 378–387. ACM, 2000. doi:10.1145/335305.335349.
- [IS14] Dmitry Itsykson and Dmitry Sokolov. Lower bounds for splittings by linear combinations. In *Proceedings of the 39th Mathematical Foundations of Computer Science (MFCS)*, pages 372–383. Springer, 2014. doi:10.1007/978-3-662-44465-8_32.
- [Juk97] Stasys Jukna. Finite limits and monotone computations: The lower bounds criterion. In *Proceedings of the 12th Computational Complexity Conference (CCC)*, pages 302–313, 1997. doi:10.1109/CCC.1997.612325.
- [Juk12] Stasys Jukna. *Boolean Function Complexity: Advances and Frontiers*, volume 27 of *Algorithms and Combinatorics*. Springer, 2012.
- [KN97] Eyal Kushilevitz and Noam Nisan. *Communication Complexity*. Cambridge University Press, 1997.
- [Kra97] Jan Krajčiek. Interpolation theorems, lower bounds for proof systems, and independence results for bounded arithmetic. *Journal of Symbolic Logic*, 62(2):457–486, 1997. doi:10.2307/2275541.
- [Kra98] Jan Krajčiek. Discretely ordered modules as a first-order extension of the cutting planes proof system. *Journal of Symbolic Logic*, 63(4):1582–1596, 1998. doi:10.2307/2586668.
- [KW88] Mauricio Karchmer and Avi Wigderson. Monotone circuits for connectivity require super-logarithmic depth. In *Proceedings of the 20th Symposium on Theory of Computing (STOC)*, pages 539–550. ACM, 1988. doi:10.1145/62212.62265.
- [LNNW95] László Lovász, Moni Naor, Ilan Newman, and Avi Wigderson. Search problems in the decision tree model. *SIAM Journal on Discrete Mathematics*, 8(1):119–132, 1995. doi:10.1137/S0895480192233867.

- [Pud97] Pavel Pudlák. Lower bounds for resolution and cutting plane proofs and monotone computations. *The Journal of Symbolic Logic*, 62(3):981–998, 1997. doi:10.2307/2275583.
- [Pud00] Pavel Pudlák. Proofs as games. *The American Mathematical Monthly*, 107(6):541–550, 2000. doi:10.2307/2589349.
- [Pud10] Pavel Pudlák. On extracting computations from propositional proofs (a survey). In *Proceedings of the 30th Foundations of Software Technology and Theoretical Computer Science (FSTTCS)*, volume 8, pages 30–41. Schloss Dagstuhl, 2010. doi:10.4230/LIPIcs.FSTTCS.2010.30.
- [Raz85] Alexander Razborov. Lower bounds on the monotone complexity of some Boolean functions. *Doklady Akademii Nauk USSR*, 285:798–801, 1985.
- [Raz89] Alexander Razborov. On the method of approximations. In *Proceedings of the 21st Symposium on Theory of Computing (STOC)*, pages 167–176, 1989. doi:10.1145/73007.73023.
- [Raz95] Alexander Razborov. Unprovability of lower bounds on circuit size in certain fragments of bounded arithmetic. *Izvestiya of the RAN*, pages 201–224, 1995.
- [Raz97] Alexander Razborov. On small size approximation models. In *The Mathematics of Paul Erdős I*, pages 385–392. Springer, 1997. doi:10.1007/978-3-642-60408-9_28.
- [Raz16a] Alexander Razborov. A new kind of tradeoffs in propositional proof complexity. *Journal of the ACM*, 63(2):16:1–16:14, 2016. doi:10.1145/2858790.
- [Raz16b] Alexander Razborov. Proof complexity and beyond. *SIGACT News*, 47(2):66–86, 2016. doi:10.1145/2951860.2951875.
- [RM99] Ran Raz and Pierre McKenzie. Separation of the monotone NC hierarchy. *Combinatorica*, 19(3):403–435, 1999. doi:10.1007/s004930050062.
- [Ros14] Benjamin Rossman. The monotone complexity of k -clique on random graphs. *SIAM Journal on Computing*, 43(1):256–279, 2014. doi:10.1137/110839059.
- [RT08] Ran Raz and Iddo Tzameret. Resolution over linear equations and multilinear proofs. *Annals of Pure and Applied Logic*, 155(3):194–224, 2008. doi:10.1016/j.apal.2008.04.001.
- [RY17] Anup Rao and Amir Yehudayoff. *Communication Complexity*. In preparation, 2017.
- [Sok17] Dmitry Sokolov. Dag-like communication and its applications. In *Proceedings of the 12th Computer Science Symposium in Russia (CSR)*, pages 294–307. Springer, 2017. doi:10.1007/978-3-319-58747-9_26.
- [ST97] Janos Simon and Shi-Chun Tsai. A note on the bottleneck counting argument. In *Proceedings of the 12th Computational Complexity Conference (CCC)*, pages 297–301, 1997. doi:10.1109/CCC.1997.612324.
- [Wig93] Avi Wigderson. The fusion method for lower bounds in circuit complexity. In *Combinatorics, Paul Erdős is Eighty*, pages 453–468. János Bolyai Mathematical Society, 1993.
- [WYY17] Xiaodi Wu, Penghui Yao, and Henry Yuen. Raz–McKenzie simulation with the inner product gadget. Technical Report TR17-010, Electronic Colloquium on Computational Complexity (ECCC), 2017. URL: <https://eccc.weizmann.ac.il/report/2017/010/>.