

# QCDCL with Cube Learning or Pure Literal Elimination – What is best?

Benjamin Böhm<sup>1</sup>, Tomáš Peitl<sup>2</sup>, Olaf Beyersdorff<sup>1</sup>

<sup>1</sup>Friedrich Schiller University Jena, Jena, Germany, <sup>2</sup>TU Wien, Vienna, Austria

## Abstract

Quantified conflict-driven clause learning (QCDCL) is one of the main approaches for solving quantified Boolean formulas (QBF). We formalise and investigate several versions of QCDCL that include cube learning and/or pure-literal elimination, and formally compare the resulting solving models via proof complexity techniques. Our results show that almost all of the QCDCL models are exponentially incomparable with respect to proof size (and hence solver running time), pointing towards different orthogonal ways how to practically implement QCDCL.

## 1 Introduction

SAT solving has revolutionised the way we perceive computationally hard problems. Determining the satisfiability of propositional formulas (SAT) has traditionally been viewed as intractable due to its NP completeness. In contrast, modern SAT solvers today routinely solve huge industrial instances of SAT from a wide variety of application domains [Biere *et al.*, 2021a]. This success of solving has not stopped at SAT, but in the last two decades was lifted to increasingly more challenging computational settings, with solving quantified Boolean formulas (QBF)—a PSPACE-complete problem—receiving key attention [Beyersdorff *et al.*, 2021].

*Conflict driven clause learning* (CDCL) is the main paradigm of modern SAT solving [Marques Silva *et al.*, 2021]. Based on the classic DPLL algorithm from the 1960s, it combines a number of advanced features, including clause learning, efficient Boolean constraint propagation, decision heuristics, restart strategies, and many more. In QBF there exist several competing approaches to solving, with lifting CDCL to the quantified level in the form of QCDCL as one of the main paradigms [Zhang and Malik, 2002], implemented e.g. in the state-of-the-art solvers DepQBF [Lonsing and Egly, 2017] and Qute [Peitl *et al.*, 2019].

For SAT/QBF solving, two questions of prime theoretical and practical importance are: (1) why are SAT/QBF solvers so effective and on which formulas do they fail? (2) Which solving ingredients are most important for their performance?

For (1), proof complexity offers the main theoretical approach to analyse the strength of solving [Buss and Nord-

ström, 2021]. In a breakthrough result, Pipatsrisawat and Darwiche [2011] and Atserias *et al.* [2011] established that CDCL on unsatisfiable formulas is equivalent to the resolution proof system, in the sense that from a CDCL run a resolution proof can be efficiently extracted [Beame *et al.*, 2004], and conversely, each resolution proof can be efficiently simulated by CDCL [Pipatsrisawat and Darwiche, 2011]. Hence the well-developed proof-complexity machinery for proof size lower bounds in resolution [Krajíček, 2019] is directly applicable to show lower bounds for running time in CDCL.

The latter simulation of resolution by CDCL assumes a strong ‘non-deterministic’ version of CDCL, whereas practical CDCL (using decision heuristics such as VSIDS) has been recently proved to be exponentially weaker than resolution [Vinyals, 2020]. In contrast, an analogous proof-theoretic characterisation is not known for QCDCL, and in particular QCDCL has recently been shown to be incomparable to Q-Resolution [Beyersdorff and Böhm, 2021], the QBF analogue of propositional resolution [Kleine Büning *et al.*, 1995].

Regarding question (2) above, there are some experimental studies [Sakallah and Marques-Silva, 2011; Elffers *et al.*, 2018; Kokkala and Nordström, 2020], but no rigorous theoretical results are known on which (Q)CDCL ingredients are most crucial for performance. Of course, gaining such a theoretical understanding would also be very valuable in guiding future solving developments.

In this paper, we contribute towards question (2) in QBF.

**Our contributions.** Following the approach of Beyersdorff and Böhm [2021], we model QCDCL as rigorously defined proof systems that are amenable to a proof-complexity analysis. This involves formalising individual QCDCL ingredients, such as clause and cube learning and different variants of Boolean constraint propagation. These can then be ‘switched’ on or off, resulting in a number of different QCDCL solving models that we can formally investigate. Our results can be summarised as follows.

(a) **QCDCL with or without cube learning.** In contrast to SAT solving, where there is somewhat of an asymmetry between satisfiable and unsatisfiable formulas, QCDCL implements a dual approach for false and true QBFs. In addition to learning clauses (as in CDCL) when running into a conflict under the current assignment, QCDCL also learns terms (or cubes) in the case a satisfying assignment is found (or a previously learned cube is satisfied). While cube learning is

necessary to make QCDCL solving complete on true QBFs, it is less clear what the effect of cube learning is on false QBFs (and we only consider those throughout the paper as we cast all our models in terms of refutational proof systems, in accordance with the proof complexity analysis of SAT [Buss and Nordström, 2021]).

Here we establish the perhaps surprising result that even for false QBFs, cube learning can be advantageous, in the sense that QCDCL without cube learning (as a proof system for false QBFs) is exponentially weaker than QCDCL with cube learning.

**(b) QCDCL with or without pure-literal elimination.** In its simplest form, Boolean constraint propagation, used to construct trails in (Q)CDCL, implements unit propagation. However, further methods can be additionally employed (and are considered in pre- and in-processing [Biere *et al.*, 2021b]). One of the classic mechanisms is pure-literal elimination, setting a pure literal (which occurs in only one polarity) to the obvious value. This is e.g. implemented in DepQBF and an efficient implementation is described by Lonsing [2012].

We show that QCDCL with or without pure-literal elimination results in incomparable proof systems, i.e., there are QBFs that are easy in QCDCL with pure literal elimination, but hard in plain QCDCL, and vice versa (the latter is perhaps more surprising).

**(c) Comparing QCDCL extensions.** Given the preceding results, it is natural (and possibly most interesting for practice) to ask how the different QCDCL extensions compare with each other. We consider QCDCL with cube learning, QCDCL with pure-literal elimination but without cube learning, and QCDCL with both cube learning and pure-literal elimination. Except for the simulation of the second by the third system, we again obtain incomparability results between the systems with exponential separations. We further show that all these systems are incomparable to Q-Resolution, again via exponential separations. An overview of the systems and their relations is given in Figure 1.

Technically, our results rest on formalising QCDCL systems as proof calculi and exhibiting specific QBFs for their separations. The latter includes both the explicit construction of short QCDCL runs and proving exponential proof size lower bounds for the relevant calculi. For the lower bounds, we identify a property of proofs (called primitivity here) that allows to use proof-theoretic machinery of Böhm and Beyersdorff [2021] in the context of our QCDCL systems.

Our theoretical results on the strength of different QCDCL models are empirically confirmed by experiments with state-of-the-art QCDCL solvers (cf. Section 8).

**Organisation.** We start in Section 2 by reviewing QBFs and Q-Resolution. In Section 3 we model variants of QCDCL as formal proof systems and develop a lower technique for such systems in Section 4. Sections 5 to 8 then contain our results on the relative strength of QCDCL variants. We conclude in Section 9 with an outlook on future research.

## 2 Preliminaries

We will use standard notions from propositional logic, such as *variables, literals, (propositional) formulas, clauses, con-*

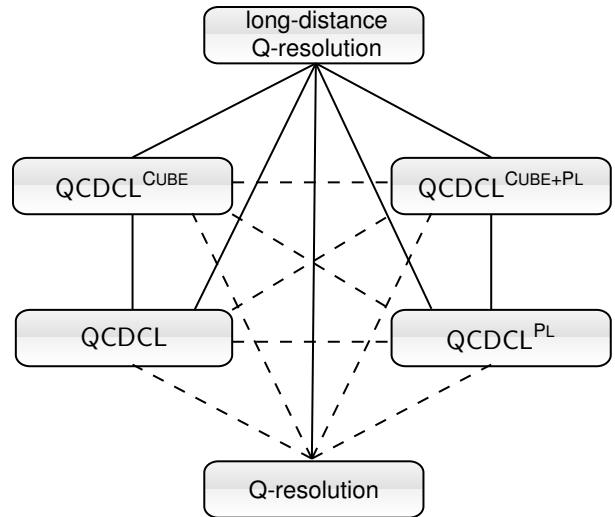


Figure 1: Hasse diagram of the simulation order of QCDCL proof systems. Solid lines represent p-simulations and exponential separations (where the system depicted above is the stronger one). Dashed lines represent separations in both directions (i.e., incomparability).

*junctive normal form (CNF), disjunctive normal form (DNF), assignments, satisfiability or restrictions.* A *cube* (or *term*) is a conjunction of literals. A literal  $\ell$  in a formula  $\Phi$  is *pure*, if it only appears in one polarity (i.e., if  $\ell$  is contained in  $\Phi$ , but  $\bar{\ell}$  is not). We define two “empty” literals  $\perp$  and  $\top$ . For a more detailed explanation of these notions, see the appendix.

A *QBF* (quantified Boolean formula)  $\Phi = Q \cdot \phi$  consists of a propositional formula  $\phi$ , called the *matrix* (denoted by  $\mathcal{C}(\Phi)$ ), and a *prefix*  $Q$ . A *prefix*  $Q = Q'_1 V_1 \dots Q'_s V_s$  consists of non-empty and pairwise disjoint sets of variables  $V_1, \dots, V_s$  and quantifiers  $Q'_1, \dots, Q'_s \in \{\exists, \forall\}$  with  $Q'_i \neq Q'_{i+1}$  for  $i \in [s-1]$ . For a variable  $x$  in  $Q$ , the *quantifier level* is  $\text{lv}(x) := \text{lv}_\Phi(x) := i$ , if  $x \in V_i$ . For  $\text{lv}_\Phi(\ell_1) < \text{lv}_\Phi(\ell_2)$  we write  $\ell_1 <_\Phi \ell_2$ .

We use the proof systems Q-resolution [Kleine Büning *et al.*, 1995] and long-distance Q-resolution [Balabanov and Jiang, 2012], containing resolution and reduction rules. In general, a clause  $C$  can be reduced universally, while a cube  $D$  can be reduced existentially. We denote the maximally universally (resp. existentially) reduced clause (resp. cube) by  $\text{red}_\Phi^\forall(C)$  (resp.  $\text{red}_\Phi^\exists(D)$ ). Cf. the appendix for details.

## 3 Formal calculi for QCDCL versions

In this section we model different versions of QCDCL as formal proof systems (we sketch this only here, full details are contained in the appendix; for background on QCDCL cf. [Beyersdorff *et al.*, 2021]). For this we need to formalise QCDCL ingredients. We start with trails. A *trail*  $\mathcal{T}$  for a QCNF  $\Phi$  is a finite sequence of literals from  $\Phi$ , including the empty literals  $\perp$  and  $\top$ . In general, a trail has the form

$$\mathcal{T} = (p_{(0,1)}, \dots, p_{(0,g_0)}; \mathbf{d}_1, p_{(1,1)}, \dots, p_{(1,g_1)}; \dots; \mathbf{d}_r, p_{(r,1)}, \dots, p_{(r,g_r)}), \quad (3.1)$$

where the  $d_i$  are *decision literals* and  $p_{(i,j)}$  are *propagated literals*. Decision literals are written in **boldface**. We use a

semicolon before each decision to mark the end of a decision level. We write  $x <_{\mathcal{T}} y$  if  $x, y \in \mathcal{T}$  and  $x$  is left of  $y$  in  $\mathcal{T}$ .

Trails can be interpreted as non-tautological sets of literals, and therefore as (partial) assignments. If  $\mathcal{T}$  is a trail, then  $\mathcal{T}[i, j]$ , for  $i \in \{0, \dots, r\}$  and  $j \in \{0, \dots, g_i\}$ , is defined as the *subtrail* that contains all literals from  $\mathcal{T}$  left of (and excluding)  $p_{(i,j)}$  (resp.  $d_i$ , if  $j = 0$ ). A trail  $\mathcal{T}$  has *run into conflict* if  $\perp \in \mathcal{T}$  or  $\top \in \mathcal{T}$ .

Simply put, our QCDCL proof systems can be interpreted as sequences of trails. These trails cannot be created arbitrary, but have to follow special rules, depending on the model. We consider the following four QCDCL variants:

- QCDCL, which can be seen as the plain model where we can only make decisions following the level order of the quantifier prefix, make propagations using clauses and use classic clause learning. We will never learn or use cubes and pure-literal elimination is turned off.
- QCDCL<sup>CUBE</sup> is an extension of QCDCL in which we can learn cubes and use them for propagations. Decisions are still level-ordered and pure-literal elimination is turned off.
- QCDCL<sup>PL</sup> is an extension of QCDCL, where we decide literals out of order if they are pure in the current configuration (pure-literal elimination). All other decisions (which we call regular decisions) are still level ordered. Cube learning is turned off.
- QCDCL<sup>CUBE+PL</sup> is an extension of QCDCL<sup>PL</sup>, in which cube learning is now allowed (as in QCDCL<sup>CUBE</sup>).

Note that decisions can only be made if there are no more propagations possible and pure literal decisions always have a higher priority than regular decisions. Also, conflicts have a higher priority than propagations of proper (existential or universal) literals. Hence, we will never skip conflicts, propagations or pure literal decisions. For each propagated literal  $p_{(i,j)}$  in a trail  $\mathcal{T}$  the formula must contain a clause or a cube that caused this propagation by becoming a unit clause/cube. We denote such a clause/cube by  $\text{ante}_{\mathcal{T}}(p_{(i,j)})$ .

After a trail has run into a conflict, or if all variables were assigned, we can start the learning process.

**Definition 3.1** (learnable constraints). *Let  $\mathcal{T}$  be a trail for  $\Phi$  of the form (3.1) with  $p_{(r,g_r)} \in \{\perp, \top\}$ . Starting with  $\text{ante}_{\mathcal{T}}(\perp)$  (resp.  $\text{ante}_{\mathcal{T}}(\top)$ ) we reversely resolve over the antecedent clauses (cubes) that propagated the existential (universal) variables, until we stop at some arbitrarily chosen point. The clause (cube) we so derive is a learnable constraint. We denote the set of learnable constraints by  $\mathcal{L}(\mathcal{T})$ .*

*We can also learn cubes from trails that did not run into conflict. If  $\mathcal{T}$  is a total assignment of the variables from  $\Phi$ , then we define the set of learnable constraints as the set of cubes  $\mathcal{L}(\mathcal{T}) := \{\text{red}_{\Phi}^{\perp}(D) \mid D \subseteq \mathcal{T} \text{ and } D \text{ satisfies } \mathcal{C}(\Phi)\}$ .*

**Definition 3.2** (QCDCL proof systems). *Let  $S$  be one of QCDCL, QCDCL<sup>CUBE</sup>, QCDCL<sup>PL</sup>, QCDCL<sup>CUBE+PL</sup>. An  $S$  proof  $\iota$  from a QCNF  $\Phi = \mathcal{Q} \cdot \phi$  of a clause or cube  $C$  is a sequence of triples*

$$\iota := [(\mathcal{T}_i, C_i, \pi_i)]_{i=1}^m,$$

where  $C_m = C$ , each  $\mathcal{T}_i$  is a trail, each  $C_i \in \mathcal{L}(\mathcal{T}_i)$  is one of the constraints we can learn from the trail, and  $\pi_i$  is the long-distance Q-resolution or long-distance Q-consensus proof of  $C_i$  we get by performing the steps in Definition 3.1. We define  $\mathfrak{R}(\iota)$  as the proof of  $C$  we get by sticking together suitable  $\pi_i$ . We denote the set of trails in  $\iota$  as  $\mathfrak{T}(\iota)$ .

*If  $C = (\perp)$ , then  $\iota$  is called an  $S$  refutation of  $\Phi$ . If  $C = [\top]$ , then  $\iota$  is an  $S$  verification of  $\Phi$ . The proof ends once we have learned  $(\perp)$  or  $[\top]$ . The size of  $\iota$  is  $|\iota| := \sum_{i=1}^m |\mathcal{T}_i|$ .*

**Theorem 3.3.** QCDCL, QCDCL<sup>CUBE</sup>, QCDCL<sup>PL</sup>, and QCDCL<sup>CUBE+PL</sup> are sound and complete proof systems.

We highlight that these systems formally model QCDCL solving as used in practice (cf. [Beyersdorff et al., 2021]).

## 4 Proving lower bounds for QCDCL systems

Throughout the paper we will concentrate on  $\Sigma_3^b$  QCNFs which we always assume to have the form  $\Phi = \exists X \forall U \exists T \cdot \phi$  for non-empty blocks of variables  $X$ ,  $U$ , and  $T$ .

A literal  $\ell$  is an  $X$ -literal, if  $\text{var}(\ell) \in X$ . Analogously, we get  $U$ - and  $T$ -literals and variables. A clause  $C \in \mathcal{C}(\Phi)$  is an  $X$ -clause, if all its literals are  $X$ -literals. The empty clause  $(\perp)$  is also an  $X$ -clause. Analogously, we define  $T$ -clauses. A clause  $C \in \mathcal{C}(\Phi)$  is an  $XT$ -clause, if it contains at least one  $X$ -literal, at least one  $T$ -literal, but no  $U$ -literals; analogously we define  $UT$ -clauses. A clause  $C \in \mathcal{C}(\Phi)$  is an  $XUT$ -clause if it contains at least one  $X$ -,  $U$ - and  $T$ -literal.

**Definition 4.1.** *We say that  $\Phi$  fulfils the  $XT$ -property, if  $\mathcal{C}(\Phi)$  contains no  $XT$ -clauses, no  $T$ -clauses that are unit (or empty) and no two  $T$ -clauses from  $\mathcal{C}(\Phi)$  are resolvable.*

As shown by Böhm and Beyersdorff [2021], clause learning does not affect the  $XT$ -property, i.e., a formula  $\Phi$  with the  $XT$ -property will still fulfil it during the whole QCDCL run even after having added new clauses to  $\mathcal{C}(\Phi)$ .

Next we recall the definition of formula gauge from [Böhm and Beyersdorff, 2021], which represents a measure that can be used for lower bounds.

**Definition 4.2** ([Böhm and Beyersdorff, 2021]). *For a QCNF  $\Phi$  as above let  $W_{\Phi}$  be the set of all Q-resolution derivations  $\pi$  from  $\Phi$  of some  $X$ -clause such that  $\pi$  only contains resolutions over  $T$ -variables and reduction steps. We set  $\text{gauge}(\Phi) := \min\{|C| : C \text{ is the root of some } \pi \in W_{\Phi}\}$ .*

We now define fully reduced and primitive proofs. Our lower bound technique will then work for fully reduced primitive refutations of formulas that fulfil the  $XT$ -property.

**Definition 4.3.** *A long-distance Q-resolution refutation  $\pi$  of a QCNF  $\Phi$  is called fully reduced, if the following holds: For each clause  $C \in \pi$  that contains universal literals that are reducible, the reduction step has to be performed immediately and  $C$  cannot be used otherwise in the proof.*

Each proof  $\mathfrak{R}(\iota)$  that was extracted from a QCDCL proof  $\iota$  is automatically fully reduced, as we perform reduction steps as soon as possible during clause learning. On the other hand, primitivity does not hold for proofs  $\mathfrak{R}(\iota)$  in general. In fact, the main work in proving our hardness results will be to show that specific extracted proofs are primitive.

**Definition 4.4.** A long-distance Q-resolution proof  $\pi$  from a  $\Sigma_3^b$  formula with the XT-property is primitive, if there are no two XUT-clauses in  $\pi$  that are resolved over an X-variable.

Since it is not possible to derive tautological clauses in fully reduced primitive proofs, we may also refer to them as (fully reduced) primitive Q-resolution proofs.

It follows from [Böhm and Beyersdorff, 2021], that these two conditions suffice to show lower bounds via gauge.

**Theorem 4.5** ([Böhm and Beyersdorff, 2021]). *Each fully reduced primitive Q-resolution refutation of a  $\Sigma_3^b$  QCNF  $\Phi$  that fulfils the XT-property has size  $2^{\Omega(\text{gauge}(\Phi))}$ .*

The next two results represent the main methodology for most of our hardness results throughout the paper.

**Lemma 4.6.** *Let  $\mathcal{T}$  be a trail in a QCDCL, QCDCL<sup>CUBE</sup>, QCDCL<sup>PL</sup> or QCDCL<sup>CUBE+PL</sup> proof from a QCNF  $\Phi$  with the XT-property. Then for each T-literal  $t_1 \in \mathcal{T}$ , which was not decided by pure literal elimination, there is a U-literal  $u \in \mathcal{T}$  with  $u <_{\mathcal{T}} t_1$ .*

**Proposition 4.7.** *Let  $\iota$  be a QCDCL, QCDCL<sup>CUBE</sup>, QCDCL<sup>PL</sup> or QCDCL<sup>CUBE+PL</sup> refutation of a QCNF  $\Phi$  that fulfils the XT-property. If  $\mathfrak{R}(\iota)$  is not primitive, then there exists a trail  $\mathcal{T} \in \mathfrak{L}(\iota)$  such that there is a U-literal  $u \in \mathcal{T}$  and an X-literal  $x \in \mathcal{T}$  with  $u <_{\mathcal{T}} x$ . Additionally,  $u$  cannot be a regular decision literal.*

Basically, this result tells us that for a non-primitive proof  $\mathfrak{R}(\iota)$  of some  $S$  proof  $\iota$ , where  $S$  is one of our four QCDCL variants,  $\iota$  needs to consist of a trail that assigns a U-literal out-of-order (i.e., before we have assigned all X-literals).

Since neither cube learning nor pure literal elimination is allowed in QCDCL, we can immediately conclude:

**Corollary 4.8.** *Let  $\iota$  be a QCDCL refutation of a QCNF  $\Phi$  that fulfils the XT-property. Then  $\mathfrak{R}(\iota)$  is primitive.*

We remark that some of the QBFs we introduce in the paper are not minimally false, i.e., we have added extra clauses to formulas that were false already. Although this is unusual in proof complexity, practical (false) instances are not guaranteed to be minimally false. Therefore it is natural to also consider these QBFs when investigating QCDCL systems. These algorithmic proof systems have to utilize all clauses, even if they are redundant for Q-resolution refutations.

## 5 Plain QCDCL vs. extensions with cubes/PL

We start by examining the influence of cube learning on our QCDCL model. For false formulas we can always prevent learning cubes by just deciding the universal variables according to a winning strategy for the universal player, which will cause a conflict on the current trail. Thus cube learning will never be disadvantageous in principle.

**Proposition 5.1.** *QCDCL<sup>CUBE</sup> p-simulates QCDCL and QCDCL<sup>CUBE+PL</sup> p-simulates QCDCL<sup>PL</sup>.*

We recall the equality formulas  $\text{Eq}_n$  of Beyersdorff et al. [2019a]. These are QCNFs with prefix  $\exists x_1 \dots x_n \forall u_1 \dots u_n \exists t_1 \dots t_n$  and matrix

$$(\bar{t}_1 \vee \dots \vee \bar{t}_n) \wedge \bigwedge_{i=1}^n ((\bar{x}_i \vee \bar{u}_i \vee t_i) \wedge (x_i \vee u_i \vee t_i)).$$

The formulas are known to be hard for Q-resolution [Beyersdorff et al., 2019a] and also for QCDCL [Beyersdorff and Böhm, 2021]. In contrast, we show that they are easy in QCDCL with cube learning.

**Proposition 5.2.** *There exist polynomial-size QCDCL<sup>CUBE</sup> refutations of  $\text{Eq}_n$ .*

*Proof Sketch.* First we learn the cubes  $x_i \wedge \bar{u}_i$  and  $\bar{x}_i \wedge u_i$  for  $i \in [n-1]$ . E.g., to learn  $x_1 \wedge \bar{u}_1$ , we use the trail

$$\mathcal{T}_1 := (\mathbf{x}_1; \dots; \mathbf{x}_n; \bar{\mathbf{u}}_1; \dots; \bar{\mathbf{u}}_n; \bar{\mathbf{t}}_1; \mathbf{t}_2; \dots; \mathbf{t}_n).$$

Then the partial assignment  $x_1 \wedge \bar{u}_1 \wedge \bar{t}_1 \wedge t_2 \wedge \dots \wedge t_n$  satisfies the matrix of  $\text{Eq}_n$ . Reducing this cube existentially results in  $x_1 \wedge \bar{u}_1$ , hence  $x_1 \wedge \bar{u}_1 \in \mathfrak{L}(\mathcal{T}_1)$ .

Having learnt all these  $2n-2$  cubes, we learn the clauses  $L_i := \bar{x}_i \vee \bar{u}_i \vee \bigvee_{j=i+1}^n (u_j \vee \bar{u}_j) \vee \bigvee_{k=1}^{i-1} \bar{t}_k$  and  $R_i := x_i \vee u_i \vee \bigvee_{j=i+1}^n (u_j \vee \bar{u}_j) \vee \bigvee_{k=1}^{i-1} \bar{t}_k$ , starting with  $i = n-1$  and down to  $i = 2$ . E.g., to learn  $L_{n-1}$  we use the trail

$$\mathcal{U}_{n-1} := (\mathbf{x}_1, u_1, t_1; \dots; \mathbf{x}_{n-1}, u_{n-1}, t_{n-1}, \bar{t}_n, x_n, \perp),$$

where  $u_i$  are propagated directly after  $x_i$  by the learnt cubes. We resolve over  $x_n, \bar{t}_n$ , and  $t_{n-1}$  to get  $L_{n-1}$ .

Having finally learnt  $L_2$  and  $R_2$ , we form the trail  $\mathcal{U}_1 := (\mathbf{x}_1, u_1, t_1, x_2, \perp)$  with  $\text{ante}_{\mathcal{U}_1}(x_2) = R_2$  and  $\text{ante}_{\mathcal{U}_1}(\perp) = L_2$  and learn  $(\bar{x}_1)$ . Then the last trail  $(\bar{x}_1, \bar{u}_1, t_1, x_2, \perp)$  yields the empty clause.  $\square$

As the formulas  $\text{Eq}_n$  require exponential-sized QCDCL refutations [Beyersdorff and Böhm, 2021] we obtain:

**Theorem 5.3.** *QCDCL<sup>CUBE</sup> is exponentially stronger than QCDCL.*

Next we will look at the influence of pure literal elimination. Now, the effect of pure literal elimination is similar to cube learning: they enable out-of-order decisions that can shorten the refutations. This again manifests in  $\text{Eq}_n$ .

**Proposition 5.4.**  *$\text{Eq}_n$  has poly-size QCDCL<sup>PL</sup> (and QCDCL<sup>CUBE+PL</sup>) refutations.*

Although pure literal elimination helps to refute  $\text{Eq}_n$ , it turns out that pure literal elimination can also be disadvantageous. It might be a fallacy to think that pure existential literals should be satisfied in the same way as unit clauses in unit propagation. We will construct formulas in which pure literal elimination thwarts finding a convenient conflict and therefore short refutations.

We construct these formulas in stages, starting with  $\text{MirrorCR}_n$ . In turn, these QBFs are based on the Completion Principle  $\text{CR}_n$  of Janota [2016], known to be hard for QCDCL [Janota, 2016; Böhm and Beyersdorff, 2021]. The ‘‘Mirror’’-modification adds new symmetries to the formula, causing pure literals to appear too late to make a difference.

**Definition 5.5.** *The QCNF  $\text{MirrorCR}_n$  consists of the prefix  $\exists x_{(1,1)}, \dots, x_{(n,n)} \forall u \exists a_1, \dots, a_n, b_1, \dots, b_n$  and the matrix  $x_{(i,j)} \vee u \vee a_i, \bar{a}_1 \vee \dots \vee \bar{a}_n, \bar{x}_{(i,j)} \vee \bar{u} \vee b_j, \bar{b}_1 \vee \dots \vee \bar{b}_n, x_{(i,j)} \vee \bar{u} \vee \bar{a}_i, a_1 \vee \dots \vee a_n, \bar{x}_{(i,j)} \vee u \vee \bar{b}_j, b_1 \vee \dots \vee b_n$  for  $i, j \in [n]$ .*

It is easy to see that  $\text{MirrorCR}_n$  fulfil the XT-property. Additionally, we can show:

**Proposition 5.6.** *The CNF  $\mathcal{C}(\text{MirrorCR}_n)$  is unsatisfiable and  $\text{gauge}(\text{MirrorCR}_n) \geq n - 1$ .*

Applying Theorem 4.5 we infer:

**Corollary 5.7.**  *$\text{MirrorCR}_n$  needs exponential-size fully reduced primitive Q-resolution refutations.*

All we have to do now is to show that all  $\text{QCDCL}^{\text{PL}}$  refutations of  $\text{MirrorCR}_n$  are primitive. Then the gauge lower bound applies. We will show that for a non-primitive refutation of  $\text{MirrorCR}_n$  we would need to decide literals by pure literal elimination, and before each pure literal elimination we have to perform another one, which is a contradiction.

**Proposition 5.8.** *From each  $\text{QCDCL}^{\text{PL}}$  refutation of  $\text{MirrorCR}_n$  we can extract a fully reduced primitive Q-resolution refutation of the same size.*

*Proof Sketch.* We show that  $\mathfrak{R}(\iota)$  is primitive if  $\iota$  is a  $\text{QCDCL}^{\text{PL}}$  refutation of  $\text{MirrorCR}_n$ . Assume that some  $\mathfrak{R}(\iota)$  is not primitive. Therefore, by Proposition 4.7, a  $U$ -literal was decided as a pure literal before all  $X$ -variables were assigned. However, such a situation is impossible due to the formula structure, resulting in a contradiction.  $\square$

**Corollary 5.9.** *The QBFs  $\text{MirrorCR}_n$  require exponential-size  $\text{QCDCL}^{\text{PL}}$  refutations.*

Next we embed this formula into a new QCNF  $\text{PLTrap}_n$ .

**Definition 5.10.** *The QCNF  $\text{PLTrap}_n$  has the prefix  $\exists y, x_{(1,1)}, \dots, x_{(n,n)} \forall u \exists a_1, \dots, a_n, b_1, \dots, b_n, a, b$ . Its matrix contains all clauses from  $\text{MirrorCR}_n$  and additionally  $(y \vee a)$ ,  $(\bar{a} \vee b)$ ,  $(\bar{a} \vee \bar{b})$ ,  $(a \vee b)$ , and  $(a \vee \bar{b})$ .*

**Proposition 5.11.**  *$\text{PLTrap}_n$  needs exponential-size  $\text{QCDCL}^{\text{PL}}$  and  $\text{QCDCL}^{\text{CUBE+PL}}$  refutations.*

Not having to follow the PLD rule, we can construct short proofs of  $\text{PLTrap}_n$  by focusing on the new clauses over  $a, b$ .

**Proposition 5.12.**  *$\text{PLTrap}_n$  has polynomial-size  $\text{QCDCL}$  refutations.*

We conclude that pure literal elimination is advantageous for  $\text{Eq}_n$ , but not for  $\text{PLTrap}_n$ . Therefore we obtain:

**Theorem 5.13.**  *$\text{QCDCL}^{\text{PL}}$  and  $\text{QCDCL}$  are incomparable as well as  $\text{QCDCL}^{\text{CUBE+PL}}$  and  $\text{QCDCL}$ .*

## 6 Cube learning vs. pure literal elimination

As shown in Section 5, cube learning improves  $\text{QCDCL}$ , while adding pure literal elimination leads to incomparable systems. Thus it is natural to directly compare cube learning and pure literal elimination. Because of the results above, we cannot use  $\text{Eq}_n$  for a potential separation. However, we can modify the QBFs such that they remain easy for  $\text{QCDCL}^{\text{PL}}$ , while eliminating the benefits from cube learning.

**Definition 6.1.** *The QCNF  $\text{TwinEq}_n$  has the prefix  $\exists x_1, \dots, x_n \forall u_1, \dots, u_n, w_1, \dots, w_n \exists t_1, \dots, t_n$ . Its matrix contains the clauses from  $\text{Eq}_n$  together with  $x_i \vee w_i \vee t_i$  and  $\bar{x}_i \vee \bar{w}_i \vee t_i$  for  $i \in [n]$ .*

The main idea of this twin construction is to ensure that all potential cubes consist of at least two universal variables. We can do the same construction for other QCNFs.

Obviously,  $\text{TwinEq}_n$  fulfils the XT-property. We compute  $\text{gauge}(\text{TwinEq}_n) = n$  and hence infer by Theorem 4.5:

**Proposition 6.2.** *Fully reduced primitive Q-resolution refutations of  $\text{TwinEq}_n$  have exponential size.*

We show that  $\text{QCDCL}^{\text{CUBE}}$  refutations of  $\text{TwinEq}_n$  are primitive by proving that it is impossible to propagate  $U$ -literals before having assigned all  $X$ -literals.

**Proposition 6.3.** *Each  $\text{QCDCL}^{\text{CUBE}}$  refutation of  $\text{TwinEq}_n$  has at least exponential size.*

Having shown that  $\text{TwinEq}_n$  is hard for  $\text{QCDCL}^{\text{CUBE}}$ , it remains to prove that it is easy for  $\text{QCDCL}^{\text{PL}}$ .

**Proposition 6.4.**  *$\text{TwinEq}_n$  has polynomial-size  $\text{QCDCL}^{\text{PL}}$  refutations.*

For the other separation we use  $\text{PLTrap}_n$ , which is hard for  $\text{QCDCL}^{\text{PL}}$ , but still easy for  $\text{QCDCL}^{\text{CUBE}}$  by Proposition 5.1. Therefore we conclude:

**Theorem 6.5.**  *$\text{QCDCL}^{\text{CUBE}}$  is incomparable to  $\text{QCDCL}^{\text{PL}}$ .*

We have seen earlier that the  $\text{QCDCL}$  system including pure literal elimination is incomparable to the system without. Now we will prove that this incomparability still holds with cube learning turned on. By Proposition 5.1, we obtain that  $\text{QCDCL}^{\text{CUBE+PL}}$  p-simulates  $\text{QCDCL}^{\text{PL}}$ . Therefore we get from Proposition 6.4:

**Corollary 6.6.**  *$\text{TwinEq}_n$  has poly-size  $\text{QCDCL}^{\text{CUBE+PL}}$  refutations.*

Since  $\text{TwinEq}_n$  is hard for  $\text{QCDCL}^{\text{CUBE}}$ , this gives us the first separation between  $\text{QCDCL}^{\text{CUBE+PL}}$  and  $\text{QCDCL}^{\text{CUBE}}$ . The other direction can be shown with  $\text{PLTrap}_n$ .

**Proposition 6.7.**  *$\text{PLTrap}_n$  has poly-size  $\text{QCDCL}^{\text{CUBE}}$  refutations.*

Hence we get:

**Theorem 6.8.**  *$\text{QCDCL}^{\text{CUBE+PL}}$  and  $\text{QCDCL}^{\text{CUBE}}$  are incomparable.*

We now consider the relation between  $\text{QCDCL}^{\text{CUBE+PL}}$  and  $\text{QCDCL}^{\text{PL}}$ . We introduce another modification of  $\text{Eq}_n$ , which we call  $\text{BulkyEq}_n$ , where we add two clauses.

**Definition 6.9.** *The QCNF  $\text{BulkyEq}_n$  is obtained from  $\text{Eq}_n$  by adding the clauses  $u_1 \vee \dots \vee u_n \vee t_1 \vee \dots \vee t_n$  and  $\bar{u}_1 \vee \dots \vee \bar{u}_n \vee t_1 \vee \dots \vee t_n$  to the matrix.*

As  $\text{Eq}_n$ , this formula fulfils the XT-property and has a high gauge value ( $\geq n - 1$ ). By Theorem 4.5 we infer that  $\text{BulkyEq}_n$  needs exponential-size fully reduced primitive Q-resolution refutations. Similarly to  $\text{MirrorCR}_n$ , we can then show that pure literal elimination does not shorten proofs because of the two additional ‘bulky’ clauses that prevent pure literals to occur early in trails. Therefore  $\text{BulkyEq}_n$  is hard for  $\text{QCDCL}^{\text{PL}}$ . On the other hand, we can explicitly construct short proofs in  $\text{QCDCL}^{\text{CUBE+PL}}$ . Therefore we get:

**Proposition 6.10.** *BulkyEq<sub>n</sub> has poly-size QCDCL<sup>CUBE+PL</sup> refutations, but needs exponential-size QCDCL<sup>PL</sup> refutations.*

As for the systems without pure literal elimination, we get:

**Theorem 6.11.** *QCDCL<sup>CUBE+PL</sup> is exponentially stronger than QCDCL<sup>PL</sup>.*

## 7 The QCDCL systems vs. Q-resolution

Beyersdorff and Böhm [2021] showed incomparability of Q-resolution and QCDCL. We now lift this to the other QCDCL variants introduced here. For one separation, we can use the QCNF QParity<sub>n</sub> from [Beyersdorff *et al.*, 2019b], which have short QCDCL refutations. These formulas have prefix  $\exists x_1 \dots x_n \forall u \exists t_1 \dots t_n$  and clauses

$$\begin{aligned} x_1 \vee \bar{t}_1, \quad \bar{x}_1 \vee t_1, \quad u \vee t_n, \quad \bar{u} \vee \bar{t}_n, \\ x_i \vee t_{i-1} \vee \bar{t}_i, \quad x_i \vee \bar{t}_{i-1} \vee t_i, \\ \bar{x}_i \vee t_{i-1} \vee t_i, \quad \bar{x}_i \vee \bar{t}_{i-1} \vee \bar{t}_i \quad \text{for } i \in \{2, \dots, n\}. \end{aligned}$$

**Theorem 7.1.** *QCDCL, QCDCL<sup>CUBE</sup>, QCDCL<sup>PL</sup> and QCDCL<sup>CUBE+PL</sup> are all incomparable to Q-resolution.*

*In detail, the QBFs QParity<sub>n</sub> have polynomial-size QCDCL, QCDCL<sup>CUBE</sup>, QCDCL<sup>PL</sup>, and QCDCL<sup>CUBE+PL</sup> refutations, but need exponential-size Q-resolution refutations. On the other hand, MirrorCR<sub>n</sub> have polynomial-size Q-resolution refutations, but need exponential-size QCDCL, QCDCL<sup>CUBE</sup>, QCDCL<sup>PL</sup>, and QCDCL<sup>CUBE+PL</sup> refutations.*

## 8 Experiments

We study proof systems in the hope that proof-complexity results will translate to running-time complexity for solvers. In this section we do our reality check to see whether this hypothesis holds up experimentally.

We picked the solver DepQBF [Lonsing and Egly, 2017], as it is the only one that supports pure-literal elimination (PLE) and also has the ability to turn cube learning (SDCL) off.<sup>1</sup> We additionally ran Qute [Peitl *et al.*, 2019] when we wanted to confirm DepQBF’s surprising behaviour. Though, Qute only supports QCDCL<sup>CUBE</sup> of the systems discussed above, and so is poorly suited for most of our experiments.

We ran DepQBF on each of the formulas used for separations in this paper, as well as on the PCNF track of the QBF Evaluation 2020.<sup>2</sup> We report on selected results here, the full results are in the appendix (including a larger copy of Figure 2). We set the time limit on each formula to 10 minutes (no memory limit). The computation was performed on a machine with two 16-core Intel® Xeon® E5-2683 v4@2.10GHz CPUs and 512GB RAM running Ubuntu 20.04.3 LTS on Linux 5.4.0-48, and organized with the help of GNU Parallel [Tange, 2021].

We discovered that *heuristics* have a significant impact on performance on theoretically easy formulas (theoretically

<sup>1</sup>In order to obtain vanilla QCDCL in DepQBF, we set `--traditional-qcdcl --long-dist-res --dep-man=simple --no-dynamic-nenofex --no-trivial-truth --no-trivial-falsity`.

<sup>2</sup><http://www.qbflib.org/qbfeval20.php>

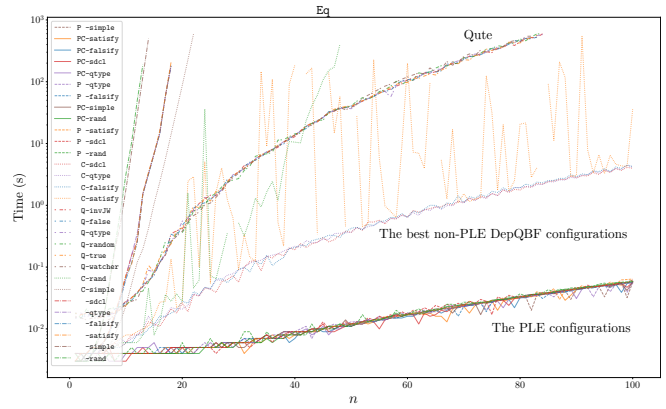


Figure 2: Labels indicate whether PLE (“P\*”) and SDCL (“\*C”) are on, configurations of one kind have the same line style. Lines for Qute start with “Q”, the remaining lines are for DepQBF. The rest of the label is the heuristic; configurations with the same heuristic share colour. Gaps in lines indicate time-outs at 10 minutes. The legend is sorted in descending order of performance.

hard formulas must be hard for solvers as well, and we confirm this in every case). We thus decided to run DepQBF with each available heuristic, in order to paint a full picture. In total, we evaluated 24 configurations of DepQBF—with and without PLE and with and without SDCL, and for each of these four, with each of the 6 possible heuristics.<sup>3</sup>

Figure 2 shows the results on Equality. While the formulas are easy using PLE regardless of the heuristic, without PLE DepQBF’s performance fluctuates depending on the heuristic, even though the formulas are ‘easy’ as long as SDCL is on. Qute’s performance is stabler, but still much worse than DepQBF with PLE. The formulas get hard without both PLE and SDCL, in line with [Beyersdorff and Böhm, 2021].

While both PLE and SDCL make Eq easy, PLE seems easier to exploit. Perhaps there is simply less room for error in applying PLE than in learning the right cubes. A mild advantage from PLE is also confirmed by DepQBF’s results on QBF Eval formulas (cf. Figure 6 in the appendix). This suggests that in spite of conceptual simplicity PLE can be quite useful, and perhaps should appear on Qute’s feature roadmap.

## 9 Conclusion

While this paper only studies false formulas (in accordance with proof complexity conventions), we expect similar phenomena of incomparability on true formulas, which we leave for future work to explore. Interestingly, while cube learning is primarily needed for true QBFs, we have shown that it can also improve the running time on false instances.

Technically, we believe that our new notion of primitive proofs has further potential for showing QCDCL lower bounds, also for QBFs of higher quantifier complexity. While previous results tried to lift lower bounds from Q-Resolution [Beyersdorff and Böhm, 2021], primitivity also applies to QBFs easy for Q-Resolution, thus supplying new reasons for QCDCL hardness.

<sup>3</sup>Using `--dec-heur=(--phase-heuristic for Qute)`.

## References

- [Atserias *et al.*, 2011] Albert Atserias, Johannes Klaus Fichte, and Marc Thurley. Clause-learning algorithms with many restarts and bounded-width resolution. *J. Artif. Intell. Res.*, 40:353–373, 2011.
- [Balabanov and Jiang, 2012] Valeriy Balabanov and Jie-Hong R. Jiang. Unified QBF certification and its applications. *Form. Methods Syst. Des.*, 41(1):45–65, 2012.
- [Beame *et al.*, 2004] Paul Beame, Henry A. Kautz, and Ashish Sabharwal. Towards understanding and harnessing the potential of clause learning. *J. Artif. Intell. Res. (JAIR)*, 22:319–351, 2004.
- [Beyersdorff and Böhm, 2021] Olaf Beyersdorff and Benjamin Böhm. Understanding the Relative Strength of QBF CDCL Solvers and QBF Resolution. In *12th Innovations in Theoretical Computer Science Conference (ITCS 2021)*, volume 185 of *Leibniz International Proceedings in Informatics (LIPIcs)*, pages 12:1–12:20, 2021.
- [Beyersdorff *et al.*, 2019a] Olaf Beyersdorff, Joshua Blinkhorn, and Luke Hinde. Size, cost, and capacity: A semantic technique for hard random QBFs. *Logical Methods in Computer Science*, 15(1), 2019.
- [Beyersdorff *et al.*, 2019b] Olaf Beyersdorff, Leroy Chew, and Mikolás Janota. New resolution-based QBF calculi and their proof complexity. *ACM Transactions on Computation Theory*, 11(4):26:1–26:42, 2019.
- [Beyersdorff *et al.*, 2021] Olaf Beyersdorff, Mikolás Janota, Florian Lonsing, and Martina Seidl. Quantified boolean formulas. In Armin Biere, Marijn Heule, Hans van Maaren, and Toby Walsh, editors, *Handbook of Satisfiability*, Frontiers in Artificial Intelligence and Applications, pages 1177–1221. IOS Press, 2021.
- [Biere *et al.*, 2021a] Armin Biere, Marijn Heule, Hans van Maaren, and Toby Walsh, editors. *Handbook of Satisfiability*, Frontiers in Artificial Intelligence and Applications. IOS Press, 2021.
- [Biere *et al.*, 2021b] Armin Biere, Matti Järvisalo, and Benjamin Kiesl. Preprocessing in sat solving. In Armin Biere, Marijn Heule, Hans van Maaren, and Toby Walsh, editors, *Handbook of Satisfiability*, Frontiers in Artificial Intelligence and Applications, pages 291–436. IOS Press, 2021.
- [Böhm and Beyersdorff, 2021] Benjamin Böhm and Olaf Beyersdorff. Lower bounds for QCDCL via formula gauge. In *Theory and Applications of Satisfiability Testing (SAT 2021)*, pages 47–63. Springer, 2021.
- [Buss and Nordström, 2021] Sam Buss and Jakob Nordström. Proof complexity and sat solving. In Armin Biere, Marijn Heule, Hans van Maaren, and Toby Walsh, editors, *Handbook of Satisfiability*, Frontiers in Artificial Intelligence and Applications, pages 233–350. IOS Press, 2021.
- [Elffers *et al.*, 2018] Jan Elffers, Jesús Giráldez-Cru, Stephan Gocht, Jakob Nordström, and Laurent Simon. Seeking practical CDCL insights from theoretical SAT benchmarks. In *Proceedings of the Twenty-Seventh International Joint Conference on Artificial Intelligence (IJCAI)*, pages 1300–1308. ijcai.org, 2018.
- [Janota, 2016] Mikolás Janota. On Q-Resolution and CDCL QBF solving. In *Proc. International Conference on Theory and Applications of Satisfiability Testing (SAT)*, pages 402–418, 2016.
- [Kleine Büning *et al.*, 1995] Hans Kleine Büning, Marek Karpinski, and Andreas Flögel. Resolution for quantified Boolean formulas. *Inf. Comput.*, 117(1):12–18, 1995.
- [Kokkala and Nordström, 2020] Janne I. Kokkala and Jakob Nordström. Using resolution proofs to analyse CDCL solvers. In *Principles and Practice of Constraint Programming - 26th International Conference (CP)*, pages 427–444. Springer, 2020.
- [Krajíček, 2019] Jan Krajíček. *Proof complexity*, volume 170 of *Encyclopedia of Mathematics and Its Applications*. Cambridge University Press, 2019.
- [Lonsing and Egly, 2017] Florian Lonsing and Uwe Egly. DepQBF 6.0: A search-based QBF solver beyond traditional QCDCL. In *Proc. International Conference on Automated Deduction (CADE)*, pages 371–384, 2017.
- [Lonsing, 2012] Florian Lonsing. *Dependency Schemes and Search-Based QBF Solving: Theory and Practice*. PhD thesis, Johannes Kepler University Linz, 2012.
- [Marques Silva *et al.*, 2021] João P. Marques Silva, Inês Lynce, and Sharad Malik. Conflict-driven clause learning SAT solvers. In Armin Biere, Marijn Heule, Hans van Maaren, and Toby Walsh, editors, *Handbook of Satisfiability*, Frontiers in Artificial Intelligence and Applications. IOS Press, 2021.
- [Peitl *et al.*, 2019] Tomás Peitl, Friedrich Slivovsky, and Stefan Szeider. Dependency learning for QBF. *J. Artif. Intell. Res.*, 65:180–208, 2019.
- [Pipatsrisawat and Darwiche, 2011] Knot Pipatsrisawat and Adnan Darwiche. On the power of clause-learning SAT solvers as resolution engines. *Artif. Intell.*, 175(2):512–525, 2011.
- [Sakallah and Marques-Silva, 2011] Karem A. Sakallah and João Marques-Silva. Anatomy and empirical evaluation of modern SAT solvers. *Bull. EATCS*, 103:96–121, 2011.
- [Tange, 2021] Ole Tange. GNU Parallel 20211222 (‘Støjberg’), December 2021. GNU Parallel is a general parallelizer to run multiple serial command line programs in parallel without changing them.
- [Vinyals, 2020] Marc Vinyals. Hard examples for common variable decision heuristics. In *Proceedings of the AAAI Conference on Artificial Intelligence (AAAI)*, 2020.
- [Zhang and Malik, 2002] Lintao Zhang and Sharad Malik. Conflict driven learning in a quantified Boolean satisfiability solver. In *Proc. IEEE/ACM International Conference on Computer-aided Design (ICCAD)*, pages 442–449, 2002.

## Appendix

In addition to further explanations and definitions the appendix contains all proofs and details omitted from the main part.

### Additional material for Section 2 (Preliminaries)

**Propositional and quantified formulas.** Variables  $x$  and negated variables  $\bar{x}$  are called *literals*. We denote the corresponding variable as  $\text{var}(x) := \text{var}(\bar{x}) := x$ .

A *clause* is a disjunction of literals, interpreted as a set of literals. A *unit clause* ( $\ell$ ) contains only one literal. The *empty clause* consists of zero literals, denoted ( $\perp$ ). A clause  $C$  is called *tautological* if  $\{\ell, \bar{\ell}\} \subseteq C$  for some literal  $\ell$ .

A *cube* is a conjunction of literals. We define a *unit cube* of a literal  $\ell$ , denoted by  $[\ell]$ , and the *empty cube*  $[\top]$  with ‘empty literal’  $\top$ . A cube  $D$  is *contradictory* if  $\{\ell, \bar{\ell}\} \subseteq D$  for some literal  $\ell$ . If  $C$  is a clause or a cube, we define  $\text{var}(C) := \{\text{var}(\ell) : \ell \in C\}$ . The negation of a clause  $C = \ell_1 \vee \dots \vee \ell_m$  is the cube  $\neg C := \bar{\ell}_1 \wedge \dots \wedge \bar{\ell}_m$ .

A *(total) assignment*  $\sigma$  of a set of variables  $V$  is a non-tautological set of literals such that for all  $x \in V$  there is some  $\ell \in \sigma$  with  $\text{var}(\ell) = x$ . A *partial assignment*  $\sigma$  of  $V$  is an assignment of a subset  $W \subseteq V$ . A clause  $C$  is *satisfied* by an assignment  $\sigma$  if  $C \cap \sigma \neq \emptyset$ . A cube  $D$  is *falsified* by  $\sigma$  if  $\neg D \cap \sigma \neq \emptyset$ . A clause  $C$  not satisfied by  $\sigma$  can be *restricted* by  $\sigma$ , defined as  $C|_\sigma := \bigvee_{\ell \in C, \bar{\ell} \notin \sigma} \ell$ . Similarly we can restrict a non-falsified cube  $D$  as  $D|_\sigma := \bigwedge_{\ell \in D \cap \sigma} \ell$ .

A *CNF* (conjunctive normal form) is a conjunction of clauses and a *DNF* (disjunctive normal form) is a disjunction of cubes. We restrict a CNF (DNF)  $\phi$  by an assignment  $\sigma$  as  $\phi|_\sigma := \bigwedge_{C \in \phi \text{ non-satisfied}} C|_\sigma$  (resp.  $\phi|_\sigma := \bigvee_{D \in \phi \text{ non-falsified}} D|_\sigma$ ). For a CNF (DNF)  $\phi$  and an assignment  $\sigma$ , if  $\phi|_\sigma = \emptyset$ , then  $\phi$  is *satisfied (falsified)* by  $\sigma$ .

A literal  $\ell$  is called *pure* in a CNF  $\phi$ , if there exists some  $C \in \phi$  such that  $\ell \in C$ , but for all  $C' \in \phi$  we have  $\bar{\ell} \notin C'$ .

A *QBF* (quantified Boolean formula)  $\Phi = \mathcal{Q} \cdot \phi$  consists of a propositional formula  $\phi$ , called the *matrix*, and a *prefix*  $\mathcal{Q}$ . A *prefix*  $\mathcal{Q} = \mathcal{Q}'_1 V_1 \dots \mathcal{Q}'_s V_s$  consists of non-empty and pairwise disjoint sets of variables  $V_1, \dots, V_s$  and quantifiers  $\mathcal{Q}'_1, \dots, \mathcal{Q}'_s \in \{\exists, \forall\}$  with  $\mathcal{Q}'_i \neq \mathcal{Q}'_{i+1}$  for  $i \in [s-1]$ . For a variable  $x$  in  $\mathcal{Q}$ , the *quantifier level* is  $\text{lv}(x) := \text{lv}_\Phi(x) := i$ , if  $x \in V_i$ . For  $\text{lv}_\Phi(\ell_1) < \text{lv}_\Phi(\ell_2)$  we write  $\ell_1 <_\Phi \ell_2$ .

For a QBF  $\Phi = \mathcal{Q} \cdot \phi$  with  $\phi$  a CNF (DNF), we call  $\Phi$  a *QCNF (QDNF)*. We write  $\mathcal{C}(\Phi) := \phi$  (resp.  $\mathcal{D}(\Phi) := \phi$ ).  $\Phi$  is an *AQBF* (augmented QBF), if  $\phi = \psi \vee \chi$  with CNF  $\psi$  and DNF  $\chi$ . Again we write  $\mathcal{C}(\Phi) := \psi$  and  $\mathcal{D}(\Phi) := \chi$ .

We restrict a QCNF (QDNF)  $\Phi = \mathcal{Q} \cdot \phi$  by an assignment  $\sigma$  as  $\Phi|_\sigma := \mathcal{Q}|_\sigma \cdot \phi|_\sigma$ , where  $\mathcal{Q}|_\sigma$  is obtained by deleting all variables from  $\mathcal{Q}$  that appear in  $\sigma$ . Analogously, we restrict an AQBF  $\Phi = \mathcal{Q} \cdot (\psi \vee \chi)$  as  $\Phi|_\sigma := \mathcal{Q}|_\sigma \cdot (\psi|_\sigma \vee \chi|_\sigma)$ .

**(Long-distance) Q-resolution and Q-consensus.** Let  $C_1$  and  $C_2$  be two clauses (cubes) from a QCNF (QDNF) or AQBF  $\Phi$ . Let  $\ell$  be an existential (universal) literal with  $\text{var}(\ell) \notin \text{var}(C_1) \cup \text{var}(C_2)$ . The *resolvent* of  $C_1 \vee \ell$  and  $C_2 \vee \bar{\ell}$  over  $\ell$  is defined as

$$(C_1 \vee \ell) \stackrel{\ell}{\bowtie}_\Phi (C_2 \vee \bar{\ell}) := C_1 \vee C_2$$

(resp.  $(C_1 \wedge \ell) \stackrel{\ell}{\bowtie}_\Phi (C_2 \wedge \bar{\ell}) := C_1 \wedge C_2$ ).

Let  $C := \ell_1 \vee \dots \vee \ell_m$  be a clause from a QCNF or AQBF  $\Phi$  such that  $\ell_i \leq_\Phi \ell_j$  for all  $i < j$ ,  $i, j \in [m]$ . Let  $k$  be minimal such that  $\ell_k, \dots, \ell_m$  are universal. Then we can perform a *universal reduction* step and obtain

$$\text{red}_\Phi^\forall(C) := \ell_1 \vee \dots \vee \ell_{k-1}.$$

Analogously, we perform *existential reduction* on cubes. Let  $D := \ell_1 \wedge \dots \wedge \ell_m$  be a cube of a QDNF or AQBF  $\Phi$  with  $\ell_i \leq_\Phi \ell_j$  for all  $i < j$ ,  $i, j \in [m]$ . Let  $k$  be minimal such that  $\ell_k, \dots, \ell_m$  are existential. Then  $\text{red}_\Phi^\exists(D) := \ell_1 \wedge \dots \wedge \ell_{k-1}$ .

As defined by Kleine Büning et al. [1995], a Q-resolution (Q-consensus) proof  $\pi$  from a QCNF (QDNF) or AQBF  $\Phi$  of a clause (cube)  $C$  is a sequence of clauses (cubes)  $\pi = (C_i)_{i=1}^m$ , such that  $C_m = C$  and for each  $C_i$  one of the following holds:

- *Axiom:*  $C_i \in \mathcal{C}(\Phi)$  (resp.  $C_i \in \mathcal{D}(\Phi)$ );
- *Resolution:*  $C_i = C_j \stackrel{x}{\bowtie}_\Phi C_k$  with  $x$  existential (univ.),  $j, k < i$ , and  $C_i$  non-tautological (non-contradictory);
- *Reduction:*  $C_i = \text{red}_\Phi^\forall(C_j)$  (resp.  $C_i = \text{red}_\Phi^\exists(C_j)$ ) for some  $j < i$ .

We call  $C$  the *root* of  $\pi$ . Balabanov and Jiang [2012] introduced an extension of Q-resolution (Q-consensus) proofs to long-distance Q-resolution (long-distance Q-consensus) proofs by replacing the resolution rule by

- *Resolution (long-distance):*  $C_i = C_j \stackrel{x}{\bowtie} C_k$  with  $x$  existential (universal) and  $j, k < i$ . The resolvent  $C_i$  is allowed to contain tautologies such as  $u \vee \bar{u}$  (resp.  $u \wedge \bar{u}$ ), if  $u$  is universal (existential). If there is a universal (existential)  $u \in \text{var}(C_j) \cap \text{var}(C_k)$ , then we require  $x <_\Phi u$ .

A Q-resolution (Q-consensus) or long-distance Q-resolution (long-distance Q-consensus) proof from  $\Phi$  of the empty clause ( $\perp$ ) (the empty cube  $[\top]$ ) is called a *refutation (verification)* of  $\Phi$ . In that case,  $\Phi$  is called *false (true)*.

A proof system  $S$  *p-simulates* a system  $S'$ , if every  $S'$  proof can be transformed in polynomial time into an  $S$  proof of the same formula.

### Full version of Section 3 with further details (Formal calculi for QCDCL versions)

In this section we model different versions of QCDCL as formal proof systems (for background on QCDCL cf. [Beyersdorff et al., 2021]). For this we need to formalise QCDCL ingredients. We start with trails. A *trail*  $\mathcal{T}$  for a QCNF or AQBF  $\Phi$  is a finite sequence of literals from  $\Phi$ , including the empty literals  $\perp$  and  $\top$ . In general, a trail has the form

$$\mathcal{T} = (p_{(0,1)}, \dots, p_{(0,g_0)}; \mathbf{d}_1, p_{(1,1)}, \dots, p_{(1,g_1)}; \dots; \mathbf{d}_r, p_{(r,1)}, \dots, p_{(r,g_r)}), \quad (3.1)$$

where the  $d_i$  are *decision literals* and  $p_{(i,j)}$  are *propagated literals*. Decision literals are written in **boldface**. We use a



semicolon before each decision to mark the end of a decision level. We write  $x <_{\mathcal{T}} y$  if  $x, y \in \mathcal{T}$  and  $x$  is left of  $y$  in  $\mathcal{T}$ .

Trails can be interpreted as non-tautological sets of literals, and therefore as (partial) assignments. If  $\mathcal{T}$  is a trail, then  $\mathcal{T}[i, j]$ , for  $i \in \{0, \dots, r\}$  and  $j \in \{0, \dots, g_i\}$ , is defined as the *subtrail* that contains all literals from  $\mathcal{T}$  left of (and excluding)  $p_{(i,j)}$  (resp.  $d_i$ , if  $j = 0$ ).

In solving, trails cannot be arbitrary, but are constructed by the rules of Boolean constraint propagation, defined next.

**(Existential propagation rule) EP:** Each  $p_{(i,j)}$  is either an existential literal from  $\Phi$  or the empty literal  $\perp$ . For each  $p_{(i,j)}$  there exists a clause  $\text{ante}_{\mathcal{T}}(p_{(i,j)}) \in \mathcal{C}(\Phi)$  such that  $\text{red}_{\Phi}^{\forall}(\text{ante}_{\mathcal{T}}(p_{(i,j)})|_{\mathcal{T}[i,j]}) = (p_{(i,j)})$ .

**(Arbitrary propagation rule) AP:** Each  $p_{(i,j)}$  is some literal from  $\Phi$  or one of the empty literals  $\perp$  or  $\top$ . If  $p_{(i,j)}$  is existential or  $\perp$ , then the condition from EP applies. If  $p_{(i,j)}$  is universal or  $\top$ , then there exists a cube  $\text{ante}_{\mathcal{T}}(p_{(i,j)}) \in \mathcal{D}(\Phi)$  such that  $\text{red}_{\Phi}^{\exists}(\text{ante}_{\mathcal{T}}(p_{(i,j)})|_{\mathcal{T}[i,j]}) = [\bar{p}_{(i,j)}]$ .

We call such a clause (cube)  $\text{ante}_{\mathcal{T}}(p_{(i,j)})$  an *antecedent clause* (antecedent cube). The next rules specify how decisions are made.

**(Level-ordered decision rule) LOD:** For each  $d_i$  we have that  $\Phi|_{\mathcal{T}[i,0]}$  does not contain unit or empty clauses or cubes. Also,  $\text{lv}_{\Phi|_{\mathcal{T}[i,0]}}(d_i) = 1$ , i.e., decisions are level-ordered.

**(Pure literal decision rule) PLD:** For each  $d_i$  we have that  $\Phi|_{\mathcal{T}[i,0]}$  does not contain any unit or empty clauses or cubes. Also, if there are pure literals in  $\mathcal{C}(\Phi|_{\mathcal{T}[i,0]})$ , then the following holds: If  $d_i$  is existential, then  $d_i$  has to be pure in  $\mathcal{C}(\Phi|_{\mathcal{T}[i,0]})$ . Otherwise, if  $d_i$  is universal, then  $\bar{d}_i$  has to be pure in  $\mathcal{C}(\Phi|_{\mathcal{T}[i,0]})$ . In that case we will underline  $d_i$  in  $\mathcal{T}$ . However, if  $\mathcal{C}(\Phi|_{\mathcal{T}[i,0]})$  does not contain any pure literals, then  $\text{lv}_{\Phi|_{\mathcal{T}[i,0]}}(d_i) = 1$ , i.e., decision literals which are not pure have to be level-ordered.

From now on, we will distinguish *regular* decisions (not underlined) and decisions via *pure literal elimination* (underlined). The last pair of rules will determine how we handle conflicts in trails.

**(Clause conflict rule) CC:** If  $\perp \in \mathcal{T}$ , then  $\perp = p_{(r,g_r)}$  and there is no point  $[i, j]$  except  $[r, g_r]$  such that there exists some  $C \in \mathcal{C}(\Phi|_{\mathcal{T}[i,j]})$  with  $\text{red}_{\Phi}^{\forall}(C) = (\perp)$ , i.e., we are not allowed to skip any conflicts.

**(Arbitrary conflict rule) AC:** If  $\perp \in \mathcal{T}$ , then  $\top \notin \mathcal{T}$  and vice versa. If there is an  $\ell \in \{\perp, \top\}$  with  $\ell \in \mathcal{T}$ , then  $\ell = p_{(r,g_r)}$  and there is no point  $[i, j]$  except  $[r, g_r]$  such that there exists some  $C \in \mathcal{C}(\Phi|_{\mathcal{T}[i,j]})$  or  $D \in \mathcal{D}(\Phi|_{\mathcal{T}[i,j]})$  with  $\text{red}_{\Phi}^{\forall}(C) = (\perp)$  or  $\text{red}_{\Phi}^{\exists}(D) = [\top]$ .

A trail  $\mathcal{T}$  has *run into conflict* if  $\perp \in \mathcal{T}$  or  $\top \in \mathcal{T}$ .

We now explain clause/cube learning and how QCDCL proofs are constructed.

**Definition 3.1** (learnable constraints). *Let  $\mathcal{T}$  be a trail for  $\Phi$  such that either EP or AP holds. Furthermore, let  $\mathcal{T}$  be of the form (3.1) with  $p_{(r,g_r)} \in \{\perp, \top\}$ . Then we will denote the*

*sequence of learnable constraints  $\mathcal{L}(\mathcal{T})$  as*

$$\mathcal{L}(\mathcal{T}) := (C_{(r,g_r)}, \dots, C_{(r,1)}, \dots, C_{(0,g_0)}, \dots, C_{(0,1)}),$$

*in which the clauses or cubes  $C_{(i,j)}$  are recursively defined as:*

*If  $p_{(r,g_r)} = \perp$ , then*

- $C_{(r,g_r)} := \text{red}_{\Phi}^{\forall}(\text{ante}(\perp))$ .

- *For  $i \in \{0, \dots, r\}$ ,  $j \in \{1, \dots, g_i - 1\}$ , if  $\bar{p}_{(i,j)} \in C_{(i,j+1)}$  and  $p_{(i,j)}$  existential, then*

$$C_{(i,j)} := \text{red}_{\Phi}^{\forall} \left( C_{(i,j+1)} \stackrel{p_{(i,j)}}{\boxtimes} \text{red}_{\Phi}^{\forall}(\text{ante}(p_{(i,j)})) \right),$$

*otherwise  $C_{(i,j)} := C_{(i,j+1)}$ .*

- *For  $i \in \{0, \dots, r - 1\}$ , if  $\bar{p}_{(i,g_i)} \in C_{(k,1)}$  and  $p_{(i,g_i)}$  existential, then*

$$C_{(i,g_i)} := \text{red}_{\Phi}^{\forall} \left( C_{(k,1)} \stackrel{p_{(i,g_i)}}{\boxtimes} \text{red}_{\Phi}^{\forall}(\text{ante}(p_{(i,g_i)})) \right)$$

*otherwise  $C_{(i,g_i)} := C_{(k,1)}$  where  $k := \min\{i < h \leq r \mid g_h > 0\}$  (note that always  $g_r > 0$ ).*

*If  $p_{(r,g_r)} = \top$ , then*

- $C_{(r,g_r)} := \text{red}_{\Phi}^{\exists}(\text{ante}(\top))$ .

- *For  $i \in \{0, \dots, r\}$ ,  $j \in \{1, \dots, g_i - 1\}$ , if  $p_{(i,j)} \in C_{(i,j+1)}$  and  $p_{(i,j)}$  universal, then*

$$C_{(i,j)} := \text{red}_{\Phi}^{\exists} \left( C_{(i,j+1)} \stackrel{p_{(i,j)}}{\boxtimes} \text{red}_{\Phi}^{\exists}(\text{ante}(p_{(i,j)})) \right),$$

*otherwise  $C_{(i,j)} := C_{(i,j+1)}$ .*

- *For  $i \in \{0, \dots, r - 1\}$ , if  $p_{(i,g_i)} \in C_{(k,1)}$  and  $p_{(i,g_i)}$  universal, then*

$$C_{(i,g_i)} := \text{red}_{\Phi}^{\exists} \left( C_{(k,1)} \stackrel{p_{(i,g_i)}}{\boxtimes} \text{red}_{\Phi}^{\exists}(\text{ante}(p_{(i,g_i)})) \right),$$

*otherwise  $C_{(i,g_i)} := C_{(k,1)}$  where  $k := \min\{i < h \leq r \mid g_h > 0\}$ .*

*We can also learn cubes from trails that did not run into conflict. If  $\mathcal{T}$  is a total assignment of the variables from  $\Phi$ , then  $\mathcal{L}(\mathcal{T})$  is defined as the following set of cubes*

$$\mathcal{L}(\mathcal{T}) := \{\text{red}_{\Phi}^{\exists}(D) \mid D \subseteq \mathcal{T} \text{ and } D \text{ satisfies } \mathcal{C}(\Phi)\}.$$

We will now define four different QCDCL proof systems. All of these are proof systems for false QBFs and use trails. The systems QCDCL and QCDCL<sup>PL</sup> work with trails using QCNFs, while trails of QCDCL<sup>CUBE</sup> and QCDCL<sup>CUBE+PL</sup> work with AQBFs (the input is still a QCNF). The trails have to meet the conditions specified in the next table.

QCDCL	QCDCL <sup>CUBE</sup>	QCDCL <sup>PL</sup>	QCDCL <sup>CUBE+PL</sup>
EP	AP	EP	AP
LOD	LOD	PLD	PLD
CC	AC	CC	AC

If  $S$  is one of QCDCL, QCDCL<sup>CUBE</sup>, QCDCL<sup>PL</sup>, QCDCL<sup>CUBE+PL</sup>, then a trail  $\mathcal{T}$  of some QCNF or AQBF  $\Phi$  is called a *natural  $S$  trail*, if it follows the specified rules.

**Definition 3.2** (QCDCL proof systems). Let  $S$  be one of QCDCL, QCDCL<sup>CUBE</sup>, QCDCL<sup>PL</sup>, QCDCL<sup>CUBE+PL</sup>. An  $S$  proof  $\iota$  from a QCNF  $\Phi = \mathcal{Q} \cdot \phi$  of a clause or cube  $C$  is a sequence of triples

$$\iota := [(\mathcal{T}_i, C_i, \pi_i)]_{i=1}^m,$$

where  $C_m = C$ , each  $\mathcal{T}_i$  is a trail of  $\Phi_i$ , each  $C_i \in \mathcal{L}(\mathcal{T}_i)$  is one of the constraints we can learn from each trail and  $\pi_i$  is the long-distance Q-resolution or long-distance Q-consensus proofs from  $\Phi_i$  of  $C_i$  we obtain by performing the steps in Definition 3.1. If necessary, we set  $\pi_i := \emptyset$ . We will denote the set of trails in  $\iota$  as  $\mathcal{T}(\iota)$ .

The QCNF or AQBFB  $\Phi_i$  is defined as follows: We set  $\Phi_1 := \Phi$ . If  $S$  is one of QCDCL or QCDCL<sup>PL</sup>, then we set  $\Phi_1 := \Phi$  and

$$\Phi_{j+1} := \mathcal{Q} \cdot (\mathcal{C}(\Phi_j) \wedge C_j).$$

However, if  $S \in \{\text{QCDCL}^{\text{CUBE}}, \text{QCDCL}^{\text{CUBE+PL}}\}$ , then the  $\Phi_i$  are AQBFBs defined as  $\Phi_1 := \mathcal{Q} \cdot (\mathcal{C}(\Phi) \vee \emptyset)$  and

$$\Phi_{j+1} := \begin{cases} \mathcal{Q} \cdot ((\mathcal{C}(\Phi_j) \wedge C_j) \vee \mathcal{D}(\Phi_j)) & \text{if } C_j \text{ is a clause,} \\ \mathcal{Q} \cdot (\mathcal{C}(\Phi_j) \vee (\mathcal{D}(\Phi_j) \vee C_j)) & \text{if } C_j \text{ is a cube,} \end{cases}$$

for  $j = 1, \dots, m-1$ .

Furthermore, we require that  $\mathcal{T}_1$  is a natural  $S$  trail and for each  $2 \leq i \leq m$  there is a point  $[a_i, b_i]$  such that  $\mathcal{T}_i[a_i, b_i] = \mathcal{T}_{i-1}[a_i, b_i]$  and  $\mathcal{T}_i \setminus \mathcal{T}_i[a_i, b_i]$  has to be a natural  $S$  trail for  $\Phi_i|_{\mathcal{T}_i[a_i, b_i]}$ . This process is called backtracking. We will also say that after  $\mathcal{T}_{i-1}$  we backtrack back to the point  $[a_i, b_i]$ . If  $\mathcal{T}_{i-1}[a_i, b_i] = \emptyset$ , then this is also called a restart.

Note that we only require  $\mathcal{T}_i \setminus \mathcal{T}_i[a_i, b_i]$  to be natural. However, since the first part always belongs to a previous trail, and the first trail in the proof is always natural, we can nevertheless use the notion of antecedent clauses for the whole trail  $\mathcal{T}_i$ . In particular, for all  $\mathcal{T}_i$  either EP or AP holds, which we need for the learning process.

Unfortunately we cannot claim the same for LOD and PLD, because for a decision  $d_i$  in a trail  $\mathcal{T}_k \in \mathcal{T}(\iota)$  it might happen that  $\Phi_k|_{\mathcal{T}_k[i,0]}$  contains unit or empty clauses or literals after clause learning and backtracking. However, we can still assume that the decisions are level-ordered, since the condition  $lv_{\Phi_k|_{\mathcal{T}_k[i,0]}}(d_i) = 1$  is not affected by new clauses. Also, it could happen that a literal  $d_i$  that was originally decided by pure literal elimination in some trail  $\mathcal{T}_k$  might not pure in  $\mathcal{C}(\Phi_{k+1}|_{\mathcal{T}_{k+1}[i,0]})$  anymore because of a new clause  $C_k$ . Nevertheless, this will not cause too much difficulties since we can always find the original trail (here:  $\mathcal{T}_k$ ) in which  $d_i$  was in fact decided as a pure literal. Thus, when we say that a literal was decided by pure literal elimination in a trail  $\mathcal{T}$ , we will always refer to this original trail.

If  $C = C_m = (\perp)$ , then  $\iota$  is called an  $S$  refutation of  $\Phi$ . If  $C = C_m = [\top]$ , then  $\iota$  is called an  $S$  verification of  $\Phi$ . The proof ends once we have learned  $(\perp)$  or  $[\top]$ .

If  $C$  is a clause, we can stick together the long-distance Q-resolution derivations from  $\{\pi_1, \dots, \pi_m\}$  and obtain a long-distance Q-resolution proof from  $\Phi$  of  $C$ , which we call  $\mathfrak{R}(\iota)$ . Similarly, if  $C$  is a cube, we can stick together the long-distance Q-consensus derivations and obtain a long-distance Q-consensus proof  $\mathfrak{R}(\iota)$  from  $\Phi$  of  $C$ .

The size of  $\iota$  is defined as  $|\iota| := \sum_{i=1}^m |\mathcal{T}_i|$ . Obviously, we have  $|\mathfrak{R}(\iota)| \in \mathcal{O}(|\iota|)$ .

We say that  $S$  p-simulates another system  $S'$ , if every  $S'$  proof  $\iota'$  can be transformed in polynomial time into an  $S$  proof  $\iota$  of the same formula.

**Theorem 3.3.** QCDCL, QCDCL<sup>CUBE</sup>, QCDCL<sup>PL</sup> and QCDCL<sup>CUBE+PL</sup> are sound and complete proof systems.

*Proof.* We start with the soundness. All  $\Phi_i$  have the same truth value. In fact, either the newly added clauses (cubes) are derived from already known clauses (cubes) by long-distance Q-resolution (long-distance Q-consensus), which is a sound proof system, or we have added a cube  $D \in \mathcal{L}(\mathcal{T}_j)$  that can be extended to an assignment  $\sigma$  which satisfies  $\mathcal{C}(\Phi_j)$  and  $\text{red}_{\Phi}^{\exists}(\sigma) = D$ . If adding such a  $D$  to  $\mathcal{D}(\Phi_j)$  would have changed the truth value from false for  $\Phi_j$  to true for  $\Phi_{j+1}$ , then there would be a strategy for the universal player that falsifies  $\mathcal{C}(\Phi_j) \vee \mathcal{D}(\Phi_j)$  and the existential player would have a strategy that satisfies  $\mathcal{C}(\Phi_j) \vee \mathcal{D}(\Phi_j) \vee D$ . If both players play their strategy on  $\Phi_{j+1}$ , then this would not satisfy  $\mathcal{C}(\Phi_j)$ , but would satisfy  $D$  (and w.l.o.g. also  $\sigma$ ). But then  $\mathcal{C}(\Phi_j)$  would be satisfied, contradiction.

For the completeness, we refer to [Beyersdorff and Böhm, 2021] for a more detailed argumentation, in which the completeness of QCDCL is proven. Because each QCDCL refutation can be interpreted as QCDCL<sup>CUBE</sup> refutation, we immediately gain completeness for QCDCL<sup>CUBE</sup>.

For the two systems with pure literal elimination, we will argue similarly as in [Beyersdorff and Böhm, 2021]. There it was shown that we can always learn clauses that become unit after backtracking (so-called *asserting* clauses) and that these clauses are always new, hence they cannot be contained in the current matrix. We claim that the same can be done in QCDCL<sup>PL</sup>.

First, it is always possible to let a trail run into a conflict by deciding the universal literals according to a winning strategy for the universal player. We can assume that in this winning strategy universal pure literals are immediately set to false, since this will never be disadvantageous for the universal player. At some point, we will falsify the matrix and receive a conflict, from which we can start clause learning.

In [Beyersdorff and Böhm, 2021] we described how one can find asserting clauses in a conflicting trail for a particular QCDCL variant (which we have not defined here) in which we are allowed to decide universal literals earlier than it would be allowed with the LOD rule. This construction can be transferred to QCDCL<sup>PL</sup> because universal pure literals are decided earlier, as well. We can ignore pure literal elimination for existential literals because they will always occur at a dead end (we cannot use them for further propagations). That means even if a trail contains existential literals that are decided out-of-order as pure literals, they will not interfere with finding asserting clauses as they will simply be ignored by clause learning.

We conclude that from each trail we will be able to learn asserting clauses that are always new. Since we only have a finite number of literals, there are also only a finite number of clauses to learn. At some point, we will learn the empty

clause ( $\perp$ ) and our QCDCL<sup>PL</sup> proof ends. Due to the fact that QCDCL<sup>PL</sup> proofs can be interpreted as QCDCL<sup>CUBE+PL</sup> proofs, we conclude that both systems are complete.  $\square$

We highlight that these systems formally model QCDCL solving as used in practice (cf. [Beyersdorff *et al.*, 2021]).

## Missing proofs from Section 4

**Theorem 4.5** ([Böhm and Beyersdorff, 2021]). *Each fully reduced primitive Q-resolution refutation of a  $\Sigma_3^b$  QCNF  $\Phi$  that fulfils the XT-property has size  $2^{\Omega(\text{gauge}(\Phi))}$ .*

*Proof Sketch.* We refer to the lower bound technique for so-called *quasi level-ordered* Q-resolution refutations (it is not necessary to define this notion here) explained in [Böhm and Beyersdorff, 2021]. In the same paper, an algorithm was designed that can transform QCDCL refutations of such  $\Sigma_3^b$  formulas (resp.  $\mathfrak{R}(\iota)$  if  $\iota$  was a QCDCL refutation) into quasi level-ordered refutations in polynomial time. However, the algorithm only crucially requires that the given proof is fully reduced (in order to input and output a Q-resolution and no long-distance Q-resolution proof) and primitive, which is true for  $\mathfrak{R}(\iota)$  if the corresponding formula fulfils the XT-property, even though the notion of primitivity was not explicitly defined in [Böhm and Beyersdorff, 2021]. In line 12 of this algorithm we need that there are no resolutions over  $X$ -variables between two XUT-clauses. In fact, without this precondition, we would not be able to guarantee a polynomial running time, although a slightly modified algorithm could handle arbitrary proofs (in exponential time), as well.

Therefore we can transform any (fully reduced) primitive Q-resolution refutation of a formula that fulfils the XT-property into a quasi level-ordered Q-resolution refutation, for which the gauge lower bound can be applied. The result then follows from Theorem 12 of [Böhm and Beyersdorff, 2021].  $\square$

**Lemma 4.6.** *Let  $\mathcal{T}$  be a trail in a QCDCL, QCDCL<sup>CUBE</sup>, QCDCL<sup>PL</sup> or QCDCL<sup>CUBE+PL</sup> proof from a QCNF  $\Phi$  with the XT-property. Then for each  $T$ -literal  $t_1 \in \mathcal{T}$ , which was not decided by pure literal elimination, there is a  $U$ -literal  $u \in \mathcal{T}$  with  $u <_{\mathcal{T}} t_1$ .*

*Proof.* If  $t_1$  was decided regularly, then the situation is clear because we can only decide  $T$ -literals if and only if all  $U$ -variables were assigned before. Therefore we can assume that there is no  $T$ -literal  $t' \in \mathcal{T}$  with  $t' \leq_{\mathcal{T}} t_1$  such that  $t'$  was a regular decision.

We will show that then there must be a  $T$ -literal  $t \leq_{\mathcal{T}} t_1$  that was propagated in  $\mathcal{T}$  via its antecedent clause  $F := \text{ante}_{\mathcal{T}}(t)$  and  $F$  contains at least one  $U$ -literal  $\bar{u}$ . Assume that such a  $t$  does not exist. Then for each  $T$ -literal  $t_j \in \mathcal{T}$  with  $t_j \leq_{\mathcal{T}} t_1$  that was propagated via its antecedent clause  $F_j := \text{ante}_{\mathcal{T}}(t_j)$ , starting with  $j = 1$ , it holds that  $F_j$  cannot contain any  $X$ -literal because of our assumption and the XT-property. Again by the XT-property,  $F_j$  cannot be a unit clause. Therefore we can find another  $T$ -literal  $t_j \neq t_{j+1} \in F_j$  such that  $t_{j+1} \in \mathcal{T}$  and  $t_{j+1} <_{\mathcal{T}} t_j$ . By our assumption, we know that  $t_{j+1}$  cannot be a regular decision. It cannot be a pure literal decision either, since we have  $t_{j+1} \in F_j$ . Then  $t_{j+1}$  must have been propagated.

But now we have detected infinitely many  $T$ -literals  $(t_j)_{j=1}^{\infty}$  assigned in  $\mathcal{T}$ , which is obviously a contradiction. That means that we can find at least one such  $t$  and some  $\bar{u}$  with  $\bar{u} \in \text{ante}_{\mathcal{T}}(t)$  and  $u <_{\mathcal{T}} t \leq_{\mathcal{T}} t_1$ .  $\square$

**Proposition 4.7.** *Let  $\iota$  be a QCDCL, QCDCL<sup>CUBE</sup>, QCDCL<sup>PL</sup> or QCDCL<sup>CUBE+PL</sup> refutation of a QCNF  $\Phi$  that fulfils the XT-property. If  $\mathfrak{R}(\iota)$  is not primitive, then there exists a trail  $\mathcal{T} \in \mathfrak{T}(\iota)$  such that there is a  $U$ -literal  $u \in \mathcal{T}$  and an  $X$ -literal  $x \in \mathcal{T}$  with  $u <_{\mathcal{T}} x$ . Additionally,  $u$  cannot be a regular decision literal.*

*Proof.* If  $\mathfrak{R}(\iota)$  is not primitive, then there are two XUT-clauses  $C, D \in \mathfrak{R}(\iota)$  that are resolved over an  $X$ -variable  $x$ , say  $x \in C$  and  $\bar{x} \in D$ . One of these clauses has to be an antecedent clause of some trail  $\mathcal{T} \in \mathfrak{T}(\iota)$ , w.l.o.g. let  $C$  be the antecedent clause  $\text{ante}_{\mathcal{T}}(x)$ . Let  $\bar{t} \in C$  be one of the  $T$ -literals from  $C$ . In particular, we have  $t \in \mathcal{T}$  and  $t <_{\mathcal{T}} x$ . Because  $t$  was not a pure literal decision (we have  $\bar{t} \in C$ ) and because of Lemma 4.6, there is a  $U$ -literal  $u \in \mathcal{T}$  with  $u <_{\mathcal{T}} t$ . We conclude that also  $u <_{\mathcal{T}} x$  holds.

Since we can only decide  $U$ -literals regularly if all  $X$ -variables are assigned in some polarity in  $\mathcal{T}$ , it is impossible for  $u$  to be a regular decision literal.  $\square$

## Missing proofs from Section 5

**Proposition 5.1.** *QCDCL<sup>CUBE</sup>  $p$ -simulates QCDCL and QCDCL<sup>CUBE+PL</sup>  $p$ -simulates QCDCL<sup>PL</sup>.*

*Proof.* A QCDCL (QCDCL<sup>PL</sup>) proof translates into a QCDCL<sup>CUBE</sup> (QCDCL<sup>CUBE+PL</sup>) proof where all trails run into conflict and no cubes are learnt.  $\square$

**Proposition 5.2.** *There exist polynomial-size QCDCL<sup>CUBE</sup> refutations of  $\text{Eq}_n$ .*

*Proof.* First we learn the cubes  $x_i \wedge \bar{u}_i$  and  $\bar{x}_i \wedge u_i$  for  $i = 1, \dots, n-1$ . In order to learn  $x_1 \wedge \bar{u}_1$ , we can use the trail

$$\mathcal{T}_1 := (\mathbf{x}_1; \dots; \mathbf{x}_n; \bar{\mathbf{u}}_1; \dots; \bar{\mathbf{u}}_n; \bar{\mathbf{t}}_1; \mathbf{t}_2; \dots; \mathbf{t}_n).$$

Then the partial assignment  $x_1 \wedge \bar{u}_1 \wedge \bar{t}_1 \wedge t_2 \wedge \dots \wedge t_n$  satisfies the matrix of  $\text{Eq}_n$ . Reducing this cube existentially results in  $x_1 \wedge \bar{u}_1$ , hence  $x_1 \wedge \bar{u}_1 \in \mathfrak{L}(\mathcal{T}_1)$ .

Learning  $\bar{x}_1 \wedge u_1$  works analogously. Note that the previously learned cube does not interfere with the learning of this cube.

Having already learned the  $2i$  cubes from 1 to  $i$ , let us now explain how to learn the two cubes for  $i+1$ . We create the following trail:

$$\mathcal{T}_{i+1} := (\mathbf{x}_1, u_1, t_1; \dots; \mathbf{x}_i, u_i, t_i; \mathbf{x}_{i+1}; \dots; \mathbf{x}_n; \bar{\mathbf{u}}_{i+1}; \dots; \bar{\mathbf{u}}_n; \bar{\mathbf{t}}_{i+1}; \mathbf{t}_{i+2}; \dots; \mathbf{t}_n)$$

with

$$\begin{aligned} \text{ante}_{\mathcal{T}_{i+1}}(u_j) &= x_j \wedge \bar{u}_j, \\ \text{ante}_{\mathcal{T}_{i+1}}(t_j) &= \bar{x}_j \vee \bar{u}_j \vee t_j \end{aligned}$$

for  $j = 1, \dots, i$ .

Again, the partial assignment  $x_{i+1} \wedge \bar{u}_{i+1} \wedge t_1 \wedge \dots \wedge t_i \wedge \bar{t}_{i+1} \wedge t_{i+2} \wedge \dots \wedge t_n$  satisfies the matrix of Eq<sub>n</sub>. This can be reduced to the cube  $x_{i+1} \wedge \bar{u}_{i+1}$ , which we will learn. As before, learning  $\bar{x}_{i+1} \wedge u_{i+1}$  works analogously.

After we have learned all of these  $2n - 2$  cubes, we will go on with clause learning in which we will successively learn the clauses

$$L_i := \bar{x}_i \vee \bar{u}_i \vee \bigvee_{j=i+1}^n (u_j \vee \bar{u}_j) \vee \bigvee_{k=1}^{i-1} \bar{t}_k$$

$$R_i := x_i \vee u_i \vee \bigvee_{j=i+1}^n (u_j \vee \bar{u}_j) \vee \bigvee_{k=1}^{i-1} \bar{t}_k$$

for  $i = 2, \dots, n - 1$ .

We start with the following trails:

$$\mathcal{U}_{n-1} := (\mathbf{x}_1, u_1, t_1; \dots; \mathbf{x}_{n-1}, u_{n-1}, t_{n-1}, \bar{t}_n, x_n, \perp)$$

with

$$\begin{aligned} \text{ante}_{\mathcal{U}_{n-1}}(u_j) &= x_j \wedge \bar{u}_j \\ \text{ante}_{\mathcal{U}_{n-1}}(t_j) &= \bar{x}_j \vee \bar{u}_j \vee t_j \\ \text{ante}_{\mathcal{U}_{n-1}}(\bar{t}_n) &= \bar{t}_1 \vee \dots \vee \bar{t}_n \\ \text{ante}_{\mathcal{U}_{n-1}}(x_n) &= x_n \vee u_n \vee t_n \\ \text{ante}_{\mathcal{U}_{n-1}}(\perp) &= \bar{x}_n \vee \bar{u}_n \vee t_n \end{aligned}$$

for  $j = 1, \dots, n - 1$ . We resolve over  $x_n, \bar{t}_n$  and  $t_{n-1}$  and get  $L_{n-1}$ . Analogously, we can learn  $R_{n-1}$ .

Suppose we have already learned  $L_{n-1}, R_{n-1}, \dots, L_i, R_i$  for some  $i \in \{3, \dots, n - 1\}$ . Let us now construct trails from which we can learn  $L_{i-1}$  and  $R_{i-1}$ :

$$\mathcal{U}_{i-1} := (\mathbf{x}_1, u_1, t_1; \dots; \mathbf{x}_{i-1}, u_{i-1}, t_{i-1}, x_i, \perp)$$

with

$$\begin{aligned} \text{ante}_{\mathcal{U}_{i-1}}(u_j) &= x_j \wedge \bar{u}_j, \\ \text{ante}_{\mathcal{U}_{i-1}}(t_j) &= \bar{x}_j \vee \bar{u}_j \vee t_j \\ \text{ante}_{\mathcal{U}_{i-1}}(x_i) &= R_i \\ \text{ante}_{\mathcal{U}_{i-1}}(\perp) &= L_i \end{aligned}$$

for  $j = 1, \dots, i - 1$ . We resolve over  $x_i$  and  $t_{i-1}$  and get  $L_{i-1}$ . Again, analogously we can derive  $R_{i-1}$ .

After we have finished learning  $L_2$  and  $R_2$ , we can create the last two trails as follows:

$$\mathcal{U}_1 := (\mathbf{x}_1, u_1, t_1, x_2, \perp)$$

with

$$\begin{aligned} \text{ante}_{\mathcal{U}_1}(u_1) &= x_1 \wedge \bar{u}_1 \\ \text{ante}_{\mathcal{U}_1}(t_1) &= \bar{x}_1 \vee \bar{u}_1 \vee t_1 \\ \text{ante}_{\mathcal{U}_1}(x_2) &= R_2 \\ \text{ante}_{\mathcal{U}_1}(\perp) &= L_2. \end{aligned}$$

We resolve over  $x_2$  and  $t_1$  and obtain the unit clause  $(\bar{x}_1)$ . Then the last trail will not contain any decision:

$$\mathcal{U}'_1 := (\bar{x}_1, \bar{u}_1, t_1, x_2, \perp)$$

with

$$\begin{aligned} \text{ante}_{\mathcal{U}'_1}(\bar{x}_1) &= (\bar{x}_1) \\ \text{ante}_{\mathcal{U}'_1}(u_1) &= x_1 \wedge \bar{u}_1 \\ \text{ante}_{\mathcal{U}'_1}(t_1) &= \bar{x}_1 \vee \bar{u}_1 \vee t_1 \\ \text{ante}_{\mathcal{U}'_1}(x_2) &= R_2 \\ \text{ante}_{\mathcal{U}'_1}(\perp) &= L_2. \end{aligned}$$

Resolving over all existential variables leads to the empty clause.  $\square$

**Proposition 5.4.** Eq<sub>n</sub> has poly-size QCDCL<sup>PL</sup> (and QCDCL<sup>CUBE+PL</sup>) refutations.

*Proof.* The refutation is similar to the one in Proposition 5.2, except that instead of learning cubes, we will use pure literal elimination to decide the universal literals out of order. We will again learn the clauses  $L_i$  and  $R_i$  for  $i = 2, \dots, n - 1$ .

We start with the following trails:

$$\mathcal{U}_{n-1} := (\mathbf{x}_1; \underline{\mathbf{u}}_1, t_1; \dots; \mathbf{x}_{n-1}; \underline{\mathbf{u}}_{n-1}, t_{n-1}, \bar{t}_n, x_n, \perp)$$

with

$$\begin{aligned} \text{ante}_{\mathcal{U}_{n-1}}(t_j) &= \bar{x}_j \vee \bar{u}_j \vee t_j \\ \text{ante}_{\mathcal{U}_{n-1}}(\bar{t}_n) &= \bar{t}_1 \vee \dots \vee \bar{t}_n \\ \text{ante}_{\mathcal{U}_{n-1}}(x_n) &= x_n \vee u_n \vee t_n \\ \text{ante}_{\mathcal{U}_{n-1}}(\perp) &= \bar{x}_n \vee \bar{u}_n \vee t_n \end{aligned}$$

for  $j = 1, \dots, n - 1$ . We resolve over  $x_n, \bar{t}_n$  and  $t_{n-1}$  and get  $L_{n-1}$ . In an analogous way we can learn  $R_{n-1}$ .

Suppose we have already learned  $L_{n-1}, R_{n-1}, \dots, L_i, R_i$  for some  $i \in \{3, \dots, n - 1\}$ . Let us now construct trails from which we can learn  $L_{i-1}$  and  $R_{i-1}$ :

$$\mathcal{U}_{i-1} := (\mathbf{x}_1; \underline{\mathbf{u}}_1, t_1; \dots; \mathbf{x}_{i-1}; \underline{\mathbf{u}}_{i-1}, t_{i-1}, x_i, \perp)$$

with

$$\begin{aligned} \text{ante}_{\mathcal{U}_{i-1}}(t_j) &= \bar{x}_j \vee \bar{u}_j \vee t_j \\ \text{ante}_{\mathcal{U}_{i-1}}(x_i) &= R_i \\ \text{ante}_{\mathcal{U}_{i-1}}(\perp) &= L_i \end{aligned}$$

for  $j = 1, \dots, i - 1$ . We resolve over  $x_i$  and  $t_{i-1}$  and get  $L_{i-1}$ . Again, analogously we can derive  $R_{i-1}$ . Note that, in our case, the learned clauses will not interfere with pure literal elimination. Once we have learned  $L_i$  and  $R_i$ , we will not need to make the literals from  $u_i, \dots, u_n$  pure any more. Also, say we learn  $L_i$  before  $R_i$ , once we decide  $\bar{x}_i$  in order to learn  $R_i$ , we will also make  $L_i$  true. Therefore pure literal elimination behaves (almost) symmetrically.

After we have finished learning  $L_2$  and  $R_2$ , we can create the last two trails as follows:

$$\mathcal{U}_1 := (\mathbf{x}_1; \underline{\mathbf{u}}_1, t_1, x_2, \perp)$$

with

$$\begin{aligned} \text{ante}_{\mathcal{U}_1}(t_1) &= \bar{x}_1 \vee \bar{u}_1 \vee t_1 \\ \text{ante}_{\mathcal{U}_1}(x_2) &= R_2 = x_2 \vee u_2 \vee \bigvee_{j=3}^n (u_j \vee \bar{u}_j) \vee \bar{t}_1 \\ \text{ante}_{\mathcal{U}_1}(\perp) &= L_2 = \bar{x}_2 \vee u_2 \vee \bigvee_{j=3}^n (u_j \vee \bar{u}_j) \vee \bar{t}_1. \end{aligned}$$

We resolve over  $x_2$  and  $t_1$  and obtain the unit clause  $(\bar{x}_1)$ . Then the last trail will not contain any decision:

$$\mathcal{U}'_1 := (\bar{x}_1, \bar{u}_1, t_1, x_2, \perp)$$

with

$$\begin{aligned} \text{ante}_{\mathcal{U}'_1}(\bar{x}_1) &= (\bar{x}_1) \\ \text{ante}_{\mathcal{U}'_1}(t_1) &= \bar{x}_1 \vee \bar{u}_1 \vee t_1 \\ \text{ante}_{\mathcal{U}'_1}(x_2) &= R_2 \\ \text{ante}_{\mathcal{U}'_1}(\perp) &= L_2. \end{aligned}$$

Resolving over all existential variables leads to the empty clause.  $\square$

**Proposition 5.6.** *The CNF  $\mathfrak{C}(\text{MirrorCR}_n)$  is unsatisfiable and  $\text{gauge}(\text{MirrorCR}_n) \geq n - 1$ .*

*Proof.* We first show the unsatisfiability of the matrix. Assume otherwise. Let  $\sigma$  be a satisfying assignment for  $\mathfrak{C}(\text{MirrorCR}_n)$ . We can assume that  $\sigma$  is a total assignment. W.l.o.g. let  $u \in \sigma$ . We distinguish two cases:

Case 1: For all  $i \in \{1, \dots, n\}$  there exists a  $j \in \{1, \dots, n\}$  such that  $\bar{x}_{(i,j)} \in \sigma$ . Then we need  $\bar{a}_i \in \sigma$  for all  $i = 1, \dots, n$ , which falsifies the clause  $a_1 \vee \dots \vee a_n$ .

Case 2: There is an  $i \in \{1, \dots, n\}$  such that for all  $j \in \{1, \dots, n\}$  we have  $x_{(i,j)} \in \sigma$ . Then we need  $b_j \in \sigma$  for all  $j = 1, \dots, n$ , which falsifies the clause  $\bar{b}_1 \vee \dots \vee \bar{b}_n$ .

In each case we can conclude that it is not possible to construct a satisfying assignment for  $\mathfrak{C}(\text{MirrorCR}_n)$ .

We now prove  $\text{gauge}(\text{MirrorCR}_n) \geq n - 1$ .

Since  $\text{MirrorCR}_n$  contains no X-clauses as axioms, we have to resolve over some  $a_i$  or  $b_j$  somehow. Obviously, it is not possible to resolve  $x_{(i,j)} \vee u \vee a_i$  and  $x_{(i,j)} \vee \bar{u} \vee \bar{a}_i$  or  $\bar{x}_{(i,j)} \vee \bar{u} \vee b_j$  and  $\bar{x}_{(i,j)} \vee u \vee \bar{b}_j$ . That means we have to use the other axioms. Because of the symmetry, we can assume that we use the clause  $\bar{a}_1 \vee \dots \vee \bar{a}_n$  somehow. Then we have to get rid of all  $\bar{a}_i$ . This can be done via the clauses  $x_{(i,j)} \vee u \vee a_i$ , or we use the clause  $a_1 \vee \dots \vee a_n$ . However, to use the latter clause we have to get rid of at least  $n - 1$  different  $a_i$  in another way first, which is only possible with the aid of the clauses  $x_{(i,j)} \vee \bar{u} \vee \bar{a}_i$ . We conclude that we will pile up at least  $n - 1$  different X-literals.  $\square$

**Proposition 5.8.** *From each  $\text{QCDCL}^{\text{PL}}$  refutation of  $\text{MirrorCR}_n$  we can extract a fully reduced primitive Q-resolution refutation of the same size.*

*Proof.* Let  $\iota$  be a  $\text{QCDCL}^{\text{PL}}$  refutation of  $\text{MirrorCR}_n$ . We will show that  $\mathfrak{R}(\iota)$  is primitive.

Assume not. Then by Proposition 4.7 there exists a trail  $\mathcal{T} \in \mathfrak{T}(\iota)$  such that there is an X-literal  $x \in \mathcal{T}$  and a U-literal  $v \in \mathcal{T}$  with  $v <_{\mathcal{T}} x$  and  $v$  is not a regular decision literal. Let us say that  $\text{var}(x) = x_{(k,m)}$  for some  $k, m \in \{1, \dots, n\}$ .

That means we have decided  $v$  (which is either  $u$  or  $\bar{u}$ ) out of order via pure literal elimination. We show that this is not possible before we have assigned all X-literals.

Claim 1: There is a T-literal  $t_1$  such that  $t_1 <_{\mathcal{T}} v <_{\mathcal{T}} x$ .

W.l.o.g. let  $v = \bar{u}$ . We need to satisfy the clauses  $\bar{x}_{(i,j)} \vee \bar{u} \vee \bar{a}_i$  for each  $i, j \in \{1, \dots, n\}$  without

assigning  $u$ . Since we want to propagate  $x$  later, we cannot assign the X-variable  $x_{(k,m)}$  in order to satisfy these clauses. That means we need to set  $b_m$  to true and  $a_k$  to false. If we set  $t_1 := b_m$ , then we get  $t_1 <_{\mathcal{T}} v <_{\mathcal{T}} x$ .

Claim 2: For each T-literal  $t_j$  with  $t_j <_{\mathcal{T}} v <_{\mathcal{T}} x$  there is another T-literal  $t_{j+1}$  such that  $t_{j+1} <_{\mathcal{T}} t_j <_{\mathcal{T}} v <_{\mathcal{T}} x$ .

Because of  $t_j <_{\mathcal{T}} v$ , the T-literal  $t_j$  cannot be a regular decision. Either  $t_j$  was decided as a pure literal, or it was propagated. If it was a pure literal, then we needed to satisfy one of the clauses  $\bar{a}_1 \vee \dots \vee \bar{a}_n, \bar{b}_1 \vee \dots \vee \bar{b}_n, a_1 \vee \dots \vee a_n$  or  $b_1 \vee \dots \vee b_n$ . This is only possible if we assigned another T-literal  $t_{j+1}$  before, hence  $t_{j+1} <_{\mathcal{T}} t_j <_{\mathcal{T}} v <_{\mathcal{T}} x$ . However, if  $t_j$  was propagated, then there is the antecedent clause  $F := \text{ante}_{\mathcal{T}}(t_j)$ . Due to the XT-property,  $F$  cannot be unit. Then there is another literal  $t_j \neq \ell \in F$ . Because the formula only contains one U-variable,  $\ell$  can only be an X- or a T-literal. Again, by the XT-property,  $F$  cannot be an XT-clause and therefore  $\ell$  has to be a T-literal, which needs to be falsified by the current trail. Therefore, if we set  $t_{j+1} := \bar{\ell}$ , we get  $t_{j+1} <_{\mathcal{T}} t_j <_{\mathcal{T}} v <_{\mathcal{T}} x$ .

We proved that  $\mathfrak{R}(\iota)$  has to be primitive, otherwise the trail  $\mathcal{T}$  would contain infinitely many T-literals  $t_j$ .  $\square$

**Proposition 5.11.** *PLTrap $_n$  needs exponential-size  $\text{QCDCL}^{\text{PL}}$  and  $\text{QCDCL}^{\text{CUBE+PL}}$  refutations.*

*Proof.* Because  $\mathfrak{C}(\text{PLTrap}_n)$  contains  $\mathfrak{C}(\text{MirrorCR}_n)$ , which is unsatisfiable, the matrix of  $\text{PLTrap}_n$  is unsatisfiable, as well. Therefore cube learning will never be applied and it suffices to consider  $\text{QCDCL}^{\text{PL}}$  refutations.

Let  $\iota$  be a  $\text{QCDCL}^{\text{PL}}$  refutation of  $\text{PLTrap}_n$ . We will show that each trail of  $\mathfrak{T}(\iota)$  can only contain literals from  $\text{MirrorCR}_n$  or  $y$ . Then  $\iota$  can be interpreted as a  $\text{QCDCL}^{\text{PL}}$  refutation of  $\text{MirrorCR}_n$  where the only difference is the assignment of  $y$ , which does not affect clause learning in any form. Then the result follows by Corollary 5.9.

In each  $\text{QCDCL}^{\text{PL}}$  trail, we will set  $y$  to true due to pure literal elimination. That means the clause  $y \vee a$  will never become the unit clause  $(a)$ .

After this, we have to assign the variables from  $\text{MirrorCR}_n$ . We will show that for each trail  $\mathcal{T} \in \mathfrak{T}(\iota)$  we have  $\{a, \bar{a}, b, \bar{b}\} \cap \mathcal{T} = \emptyset$ .

First of all, it is obvious that pure literal elimination of  $a$  or  $b$  is impossible at any time due to the four clauses  $\bar{a} \vee b, a \vee b, \bar{a} \vee \bar{b}$  and  $a \vee \bar{b}$ . In fact, if, for example, we would like to make  $b$  pure, then we have to satisfy the clauses  $\bar{a} \vee \bar{b}$  and  $a \vee \bar{b}$ , which cannot be done without setting  $b$  to false.

Next, let us assume that there is some literal  $\ell \in \{a, \bar{a}, b, \bar{b}\}$  that was propagated in some trail  $\mathcal{T} \in \mathfrak{T}(\iota)$ . In particular, let  $\mathcal{T}$  be the first trail in which we propagated a literal  $\ell \in \{a, \bar{a}, b, \bar{b}\}$ . Since  $y \vee a$  can never be used as an antecedent clause for  $a$ , we have  $\text{ante}_{\mathcal{T}}(\ell) \in \{\bar{a} \vee b, a \vee b, \bar{a} \vee \bar{b}, a \vee \bar{b}\}$ . But then we would need another  $\ell \neq \ell' \in \{a, \bar{a}, b, \bar{b}\}$  with  $\ell' \in \mathcal{T}$  and  $\ell' <_{\mathcal{T}} \ell$ . If we suppose that  $\ell$  was the first propagation of a literal from  $\{a, \bar{a}, b, \bar{b}\}$ , then we conclude that  $\ell'$  has to be a regular decision.

We will now argue that we get a contradiction if there is a trail  $\mathcal{T} \in \mathfrak{T}(\iota)$  in which we have decided a literal  $\ell' \in \{a, \bar{a}, b, \bar{b}\}$ . Because of the level-ordered decision rule

LOD, there exists  $v \in \{u, \bar{u}\}$  with  $v \in \mathcal{T}$  and  $v <_{\mathcal{T}} \ell'$ . We can only decide  $v$  if we have assigned all existential literals left of  $v$ . In particular, for each  $i, j = 1, \dots, n$  there is a literal  $\ell_{(i,j)} \in \{x_{(i,j)}, \bar{x}_{(i,j)}\}$  with  $\ell_{(i,j)} \in \mathcal{T}$  and  $\ell_{(i,j)} <_{\mathcal{T}} v$ . We now distinguish two cases.

**Case 1:** For all  $i \in \{1, \dots, n\}$  there exists a  $j \in \{1, \dots, n\}$  with  $\ell_{(i,j)} = \bar{x}_{(i,j)}$ .

Then if  $v = u$ , we will gain unit clauses  $(\bar{a}_i)$  for  $i = 1, \dots, n$  from the clauses  $x_{(i,j)} \vee \bar{u} \vee \bar{a}_i$ , which can be used for unit propagations that lead to a conflict in the clause  $a_1 \vee \dots \vee a_n$ . Otherwise, if  $v = \bar{u}$ , then we will get unit clauses  $(a_i)$  from the clauses  $x_{(i,j)} \vee u \vee a_i$  and a conflict in  $\bar{a}_1 \vee \dots \vee \bar{a}_n$ .

**Case 2:** There exists an  $i \in \{1, \dots, n\}$  such that for all  $j \in \{1, \dots, n\}$  it holds  $\ell_{(i,j)} = x_{(i,j)}$ .

This case is analogous to Case 1 with unit clauses  $(b_j)$  (resp.  $(\bar{b}_j)$ ) and a conflict in  $\bar{b}_1 \vee \dots \vee \bar{b}_n$  (resp.  $b_1 \vee \dots \vee b_n$ ).

In each case we will get a conflict in some clause. That means the trail  $\mathcal{T}$  would run into a conflict before we would have the chance to decide  $\ell'$ . That shows that  $\ell'$  cannot be decided at any point. We conclude that no trail from  $\iota$  can contain a literal from  $\{a, \bar{a}, b, \bar{b}\}$ .  $\square$

**Proposition 5.12.** *PLTrap<sub>n</sub> has polynomial-size QCDCL refutations.*

*Proof.* The shortest refutation only consists of two trails. We start with

$$\mathcal{T} := (\bar{y}, a, b, \perp)$$

with

$$\begin{aligned} \text{ante}_{\mathcal{T}}(a) &= y \vee a \\ \text{ante}_{\mathcal{T}}(b) &= \bar{a} \vee b \\ \text{ante}_{\mathcal{T}}(\perp) &= \bar{a} \vee \bar{b}. \end{aligned}$$

We resolve over  $b$  and learn the unit clause  $(\bar{a})$ .

The final trail looks as follows:

$$\mathcal{U} := (\bar{a}, b, \perp)$$

with

$$\begin{aligned} \text{ante}_{\mathcal{U}}(\bar{a}) &= (\bar{a}) \\ \text{ante}_{\mathcal{U}}(b) &= a \vee b \\ \text{ante}_{\mathcal{U}}(\perp) &= a \vee \bar{b}, \end{aligned}$$

from which we can learn the empty clause by resolving over everything.  $\square$

## Missing proofs from Section 6

**Proposition 6.2.** *Fully reduced primitive Q-resolution refutations of TwinEq<sub>n</sub> have exponential size.*

*Proof.* We need to show  $\text{gauge}(\text{TwinEq}_n) = n$ , then the result follows by Theorem 4.5.

Since we have to resolve over  $T$  somehow, we have to use the clause  $\bar{t}_1 \vee \dots \vee \bar{t}_n$ . Hence, we have to resolve over each  $t_i$  at least once, and therefore we will pile up  $x_i$  or  $\bar{x}_i$  in each resolution step due to the XUT-axioms.  $\square$

**Proposition 6.3.** *Each QCDCL<sup>CUBE</sup> refutation of TwinEq<sub>n</sub> has at least exponential size.*

*Proof.* We will prove that from each QCDCL<sup>CUBE</sup> refutation of TwinEq<sub>n</sub> we can extract a fully reduced primitive Q-resolution refutation of the same size. Let  $\iota$  be a QCDCL<sup>CUBE</sup> refutation of TwinEq<sub>n</sub>. We will show that  $\mathfrak{R}(\iota)$  is primitive.

Assume not. Then by Proposition 4.7 there exists a trail  $\mathcal{T} \in \mathfrak{T}(\iota)$  such that there is an  $X$ -literal  $x \in \mathcal{T}$  and a  $U$ -literal  $u \in \mathcal{T}$  with  $u <_{\mathcal{T}} x$ . Also,  $u$  cannot be a regular decision in  $\mathcal{T}$ .

Hence, we have propagated  $u$  before  $x$ . Universal propagation can only be performed via cubes. Let us now consider how the initial cubes from TwinEq<sub>n</sub> look like.

Assume that the cube  $A$  is a (not necessarily total) assignment that satisfies the matrix of TwinEq<sub>n</sub>. We have to satisfy the clause  $\bar{t}_1 \vee \dots \vee \bar{t}_n$ , hence there is a  $j \in \{1, \dots, n\}$  with  $\bar{t}_j \in A$ . Then we also have to satisfy the four clauses

$$\begin{aligned} x_j \vee u_j \vee t_j \\ \bar{x}_j \vee \bar{u}_j \vee t_j \\ x_j \vee w_j \vee t_j \\ \bar{x}_j \vee \bar{w}_j \vee t_j. \end{aligned}$$

That means  $x_j$  has to appear in some polarity in  $A$ , say  $x_j \in A$ . But then we need to set both  $u_j$  and  $w_j$  to false, thus  $\bar{u}_j, \bar{w}_j \in A$ .

We conclude that each (reduced) cube has to contain one of the subcubes

$$\begin{aligned} x_j \wedge \bar{u}_j \wedge \bar{w}_j \\ \bar{x}_j \wedge u_j \wedge w_j \end{aligned}$$

for some  $j \in \{1, \dots, n\}$ . This also causes that none of these cubes are resolvable.

We observe that all cubes that can be used for universal unit propagation contain at least two universal literals. Since we needed one of these cubes as antecedent cube of some universal literal in our trail  $\mathcal{T}$ , we would have needed to decide or propagate another universal literal before. Having only finitely many universal literals, we would have needed to decide one universal literal before propagating  $x$ , which is a contradiction to our decision rule LOD.

This shows that  $\mathfrak{R}(\iota)$  is indeed primitive.  $\square$

**Proposition 6.4.** *TwinEq<sub>n</sub> has polynomial-size QCDCL<sup>PL</sup> refutations.*

*Proof.* The proof is similar to the one in Proposition 5.4, except one change: Each time some universal literal is getting pure, say  $u_i$ , then also  $w_i$  becomes pure as well. That means each time we decide some  $u_i$  (resp.  $\bar{u}_i$ ) in the trail by pure literal elimination, we also have to do the same to  $w_i$  (resp.  $\bar{w}_i$ ) in the next decision level. However, this does not affect anything concerning unit propagation or clause learning.

To give an example: The trail  $\mathcal{U}_{n-1}$  from Proposition 5.4 will now look like

$$\begin{aligned} \mathcal{U}_{n-1} := (\mathbf{x}_1; \mathbf{u}_1, t_1; \mathbf{w}_1; \dots; \mathbf{x}_{n-2}; \mathbf{u}_{n-2}, t_{n-2}; \mathbf{w}_{n-2}; \\ \mathbf{x}_{n-1}; \mathbf{u}_{n-1}, t_{n-1}, \bar{t}_n, x_n, \perp). \end{aligned}$$

$\square$

**Proposition 6.7.**  $\text{PLTrap}_n$  has poly-size  $\text{QCDCL}^{\text{CUBE}}$  refutations.

*Proof.* The short proofs in  $\text{QCDCL}^{\text{CUBE}}$  follow from Propositions 5.1 and 5.12.  $\square$

**Proposition 6.10.**  $\text{BulkyEq}_n$  has polynomial-size  $\text{QCDCL}^{\text{CUBE+PL}}$  refutations, but needs exponential-size  $\text{QCDCL}^{\text{PL}}$  refutations.

*Proof. Part 1:*  $\text{BulkyEq}_n$  needs exponential-size  $\text{QCDCL}^{\text{PL}}$  refutations.

We first prove  $\text{gauge}(\text{BulkyEq}_n) \geq n - 1$ . To derive an  $X$ -clause, we have to use  $t_1 \vee \dots \vee t_n$  somehow. That means we have to resolve over each  $t_i$ . We can resolve with  $u_1 \vee \dots \vee u_n \vee t_1 \vee \dots \vee t_n$  or  $\bar{u}_1 \vee \dots \vee \bar{u}_n \vee t_1 \vee \dots \vee t_n$  only after we have resolved away at least  $n - 1$  different  $T$ -variables otherwise. That means we have pile up at least  $n - 1$  different  $X$ -literals by using the clauses  $x_i \vee u_i \vee t_i$  or  $\bar{x}_i \vee \bar{u}_i \vee t_i$ . Hence  $\text{gauge}(\text{BulkyEq}_n) \geq n - 1$ .

We will now prove that from each  $\text{QCDCL}^{\text{PL}}$  refutation of  $\text{BulkyEq}_n$  we can extract a fully reduced primitive Q-resolution refutation of the same size. Let  $\iota$  be a  $\text{QCDCL}^{\text{PL}}$  refutation of  $\text{BulkyEq}_n$ . We will show that  $\mathfrak{R}(\iota)$  is primitive.

Assume not. Then by Proposition 4.7 there exists a trail  $\mathcal{T} \in \mathfrak{T}(\iota)$  such that there is an  $X$ -literal  $x \in \mathcal{T}$  and a  $U$ -literal  $u \in \mathcal{T}$  with  $u <_{\mathcal{T}} x$  and  $u$  is not a regular decision literal.

Since cube learning is disabled, this universal literal  $u$  had to be decided by pure literal elimination. We will show that pure literal elimination of the universal literal  $u$  before deciding or propagating all  $X$ -variables is not possible. Define  $M := \{u_i, \bar{u}_i, t_i, \bar{t}_i : i = 1, \dots, n\}$ .

**Claim 1:** There exists some  $\ell_1 \in M$  such that  $\ell_1 <_{\mathcal{T}} u <_{\mathcal{T}} x$ .

In order to make  $u$  pure, we have to satisfy one of the clauses  $u_1 \vee \dots \vee u_n \vee t_1 \vee \dots \vee t_n$  or  $\bar{u}_1 \vee \dots \vee \bar{u}_n \vee t_1 \vee \dots \vee t_n$ . In particular, we need some  $\ell_1 \in M$  with  $\ell_1 <_{\mathcal{T}} u <_{\mathcal{T}} x$ .

**Claim 2:** For each  $\ell_j \in M$  with  $\ell_j <_{\mathcal{T}} u <_{\mathcal{T}} x$  there exists some  $\ell_{j+1} \in M$  such that  $\ell_{j+1} <_{\mathcal{T}} \ell_j <_{\mathcal{T}} u <_{\mathcal{T}} x$ .

If  $\ell_j$  was decided via pure literal elimination, we can use a similar argument as in Claim 1 (now we have satisfy one of the three clauses  $u_1 \vee \dots \vee u_n \vee t_1 \vee \dots \vee t_n$ ,  $\bar{u}_1 \vee \dots \vee \bar{u}_n \vee t_1 \vee \dots \vee t_n$  or  $\bar{t}_1 \vee \dots \vee \bar{t}_n$ ) and conclude that we need some  $\ell_{j+1} \in M$  with  $\ell_{j+1} <_{\mathcal{T}} \ell_j <_{\mathcal{T}} u <_{\mathcal{T}} x$ . However, if  $\ell_j$  was not decided as a pure literal, then it has to be a  $T$ -literal that was propagated. Note that we cannot have decided  $\ell_j$  regularly because of  $\ell_j <_{\mathcal{T}} x$  and  $\ell_j <_{\mathcal{T}} u$ . That means there is an antecedent clause  $F := \text{ante}_{\mathcal{T}}(\ell_j)$ . Due to the XT-property,  $F$  cannot be a unit clause. That means there is another literal  $\ell_j \neq \ell \in F$ . If  $\ell$  is a  $U$ - or a  $T$ -literal, then we can set  $\ell_{j+1} := \bar{\ell}$ . If  $\ell$  is an  $X$ -literal, then there is at least one  $U$ -literal  $v \in F$ , again because of the XT-property. Then we can set  $\ell_{j+1} := \bar{v}$ .

We have proven that if  $\mathfrak{R}(\iota)$  is not primitive, then  $\mathcal{T}$  has to contain an endless number of literals  $\ell_j$ , which is obviously not possible since the formula only consists of finitely many variables. That means  $\mathfrak{R}(\iota)$  has to be primitive.

**Part 2:**  $\text{BulkyEq}_n$  has polynomial-size  $\text{QCDCL}^{\text{CUBE+PL}}$  refutations.

We start with the learning of exactly two cubes:  $x_1 \wedge \bar{u}_1$  and  $\bar{x}_1 \wedge u_1$ . We do this via the following two trails:

$$\begin{aligned} \mathcal{T} &:= (\mathbf{x}_1; \dots; \mathbf{x}_n; \bar{\mathbf{u}}_1; \dots; \bar{\mathbf{u}}_n; \bar{\mathbf{t}}_1; \mathbf{t}_2; \dots; \mathbf{t}_n) \\ \mathcal{T}' &:= (\bar{\mathbf{x}}_1; \dots; \bar{\mathbf{x}}_n; \mathbf{u}_1; \dots; \mathbf{u}_n; \bar{\mathbf{t}}_1; \mathbf{t}_2; \dots; \mathbf{t}_n) \end{aligned}$$

Unfortunately we cannot continue learning the other cubes as in Proposition 5.2 since this will be blocked by pure literal elimination. However, we can use this effect to our advantage by simulating the missing cubes in this way.

Let us now start the learning of the clauses  $L_i$  and  $R_i$  for  $i = 2, \dots, n - 1$  from the proof of Proposition 5.2.

We begin by constructing the following trail:

$$\begin{aligned} \mathcal{U}_{n-1} &:= (\mathbf{x}_1, u_1, t_1; \mathbf{x}_2; \underline{\mathbf{u}}_2, t_2, \dots, \mathbf{x}_{n-2}; \underline{\mathbf{u}}_{n-2}, t_{n-2}; \\ &\quad \mathbf{x}_{n-1}, \underline{\mathbf{u}}_{n-1}, t_{n-1}, \bar{t}_n, x_n, \perp) \end{aligned}$$

with the same antecedent constraint as in Proposition 5.2 (except of the pure literals  $u_2, \dots, u_{n-2}$ ) and the same learned clause  $L_{n-1}$ . Analogously we can learn  $R_{n-1}$ .

We go on with the trails  $\mathcal{U}_{n-2}, \dots, \mathcal{U}_2$  in the same way as in Proposition 5.2 where we learn  $L_{n-2}, \dots, L_2$ , except that the literals  $u_2, \dots, u_{i-1}$  in  $\mathcal{U}_{i-1}$  are now pure literals and not propagated via cubes. However, this does not affect the clause learning process in any aspect. The same is obviously true for the analogous trails in which we learn  $R_{n-2}, \dots, R_2$ .

We finish the proof with the last two trails  $\mathcal{U}_1$  and  $\mathcal{U}'_1$  exactly as in Proposition 5.2.  $\square$

## Missing proofs from Section 7

**Theorem 7.1.**  $\text{QCDCL}$ ,  $\text{QCDCL}^{\text{CUBE}}$ ,  $\text{QCDCL}^{\text{PL}}$  and  $\text{QCDCL}^{\text{CUBE+PL}}$  are incomparable to Q-resolution. In detail, the formula  $\text{QParity}_n$  has polynomial-size  $\text{QCDCL}$ ,  $\text{QCDCL}^{\text{CUBE}}$ ,  $\text{QCDCL}^{\text{PL}}$  and  $\text{QCDCL}^{\text{CUBE+PL}}$  refutations, but needs exponential-size Q-resolution refutations. On the other hand,  $\text{MirrorCR}_n$  has polynomial-size Q-resolution refutations, but needs exponential-size  $\text{QCDCL}$ ,  $\text{QCDCL}^{\text{CUBE}}$ ,  $\text{QCDCL}^{\text{PL}}$  and  $\text{QCDCL}^{\text{CUBE+PL}}$  refutations.

*Proof. Claim 1:*  $\text{QParity}_n$  has polynomial-size  $\text{QCDCL}$  and  $\text{QCDCL}^{\text{CUBE}}$  refutations.

It was proven in [Beyersdorff and Böhm, 2021] that  $\text{QParity}_n$  has short  $\text{QCDCL}$  refutations. And because of Proposition 5.1, the formula is easy for  $\text{QCDCL}^{\text{CUBE}}$ , as well.

**Claim 2:**  $\text{QParity}_n$  has polynomial-size  $\text{QCDCL}^{\text{PL}}$  and  $\text{QCDCL}^{\text{CUBE+PL}}$  refutations.

We will show that we will never find pure literals while creating  $\text{QCDCL}^{\text{PL}}$  trails. In fact, the only way in making a literal  $\ell$  pure is to create a unit clause ( $\ell$ ), which would immediately lead to the propagation of  $\ell$  or a conflict.

For example, suppose the literal  $t_i$  is pure at some point in the trail. Then the clauses  $x_i \vee t_{i-1} \vee \bar{t}_i$  and  $\bar{x}_i \vee \bar{t}_{i-1} \vee \bar{t}_i$  must have been satisfied by the current assignment of the trail. Since we have not assigned  $t_i$  yet, we have to set either  $x_i$  to true and  $t_{i-1}$  to false, or  $x_i$  to false and  $t_{i-1}$  to true. In both cases we would obtain the unit clause ( $t_i$ ) by apply this assignment to either  $x_i \vee \bar{t}_{i-1} \vee t_i$  or  $\bar{x}_i \vee t_{i-1} \vee t_i$ .

The same holds for the universal variable  $u$ . For  $u$  or  $\bar{u}$  to be pure, we need to set  $t_n$  to false or true. But then we would obtain the unit clause  $(u)$  or  $(\bar{u})$ , which would immediately lead to a conflict.

We conclude that the polynomial-size QCDCL refutation of  $\text{QParity}_n$  is a  $\text{QCDCL}^{\text{PL}}$  refutation as well. And because  $\text{QCDCL}^{\text{CUBE+PL}}$  p-simulates  $\text{QCDCL}^{\text{PL}}$ ,  $\text{QParity}_n$  is also easy for  $\text{QCDCL}^{\text{CUBE+PL}}$ .

**Claim 3:**  $\text{QParity}_n$  needs exponential-size Q-resolution refutations.

This was already proven in [Beyersdorff *et al.*, 2019b].

**Claim 4:**  $\text{MirrorCR}_n$  needs exponential-size QCDCL,  $\text{QCDCL}^{\text{CUBE}}$ ,  $\text{QCDCL}^{\text{PL}}$  and  $\text{QCDCL}^{\text{CUBE+PL}}$  refutations.

Because of Proposition 5.6, each trail  $\mathcal{T}$  in a  $\text{QCDCL}^{\text{CUBE}}$  or  $\text{QCDCL}^{\text{CUBE+PL}}$  refutation runs into a conflict. Therefore we will always learn clauses and no cubes. Then each  $\text{QCDCL}^{\text{CUBE}}$  refutation can be interpreted as a QCDCL refutation and each  $\text{QCDCL}^{\text{CUBE+PL}}$  refutation can be interpreted as a  $\text{QCDCL}^{\text{PL}}$  refutation. The rest follows by Corollary 4.8, 5.7 and 5.9.

**Claim 5:**  $\text{MirrorCR}_n$  has polynomial-size Q-resolution refutations.

This follows directly from the fact that  $\text{MirrorCR}_n$  extends the original QCNF  $\text{CR}_n$ , which has polynomial-size Q-resolution refutations [Janota, 2016]. We will just ignore the clauses that are not contained in  $\text{CR}_n$ .  $\square$

## Further experimental results (complementing Section 8)

Figure 3 shows DepQBF’s behaviour on PLTrap and TwinEq. We see that here solver performance matches proof complexity almost perfectly. The only slight discrepancy is that PLTrap remains hard without PLE with the heuristics `satisfy` and `qtype`.

$\text{MirrorCR}$  should be, and is, hard for every configuration (Figure 4).

On the other hand, BulkyEq exhibits a similarly erratic behaviour as Equality (Figure 5). We know that BulkyEq is easy for  $\text{QCDCL}^{\text{CUBE+PL}}$ , but hard for  $\text{QCDCL}^{\text{CUBE}}$  (Proposition 6.10), yet somehow it seems the only configurations able to solve BulkyEq fast are ones without PLE (and with SDCL). It remains to be seen how PLE hurts solver performance here; no apparent trap like in PLTrap is discernible.

Finally, Figure 6 shows the performance of DepQBF in the default vanilla QCDCL configuration with and without pure-literal elimination. With PLE, DepQBF solved 84 formulas, while without only 80. 95 formulas were solved by at least one configuration. This serves as an illustration that benefits from pure-literal elimination can be observed outside of crafted proof-complexity formulas. A state-of-the-art solver configuration on industrial formulas would typically include a preprocessor and other techniques that go beyond vanilla QCDCL; we aim to test just QCDCL with and without PLE.



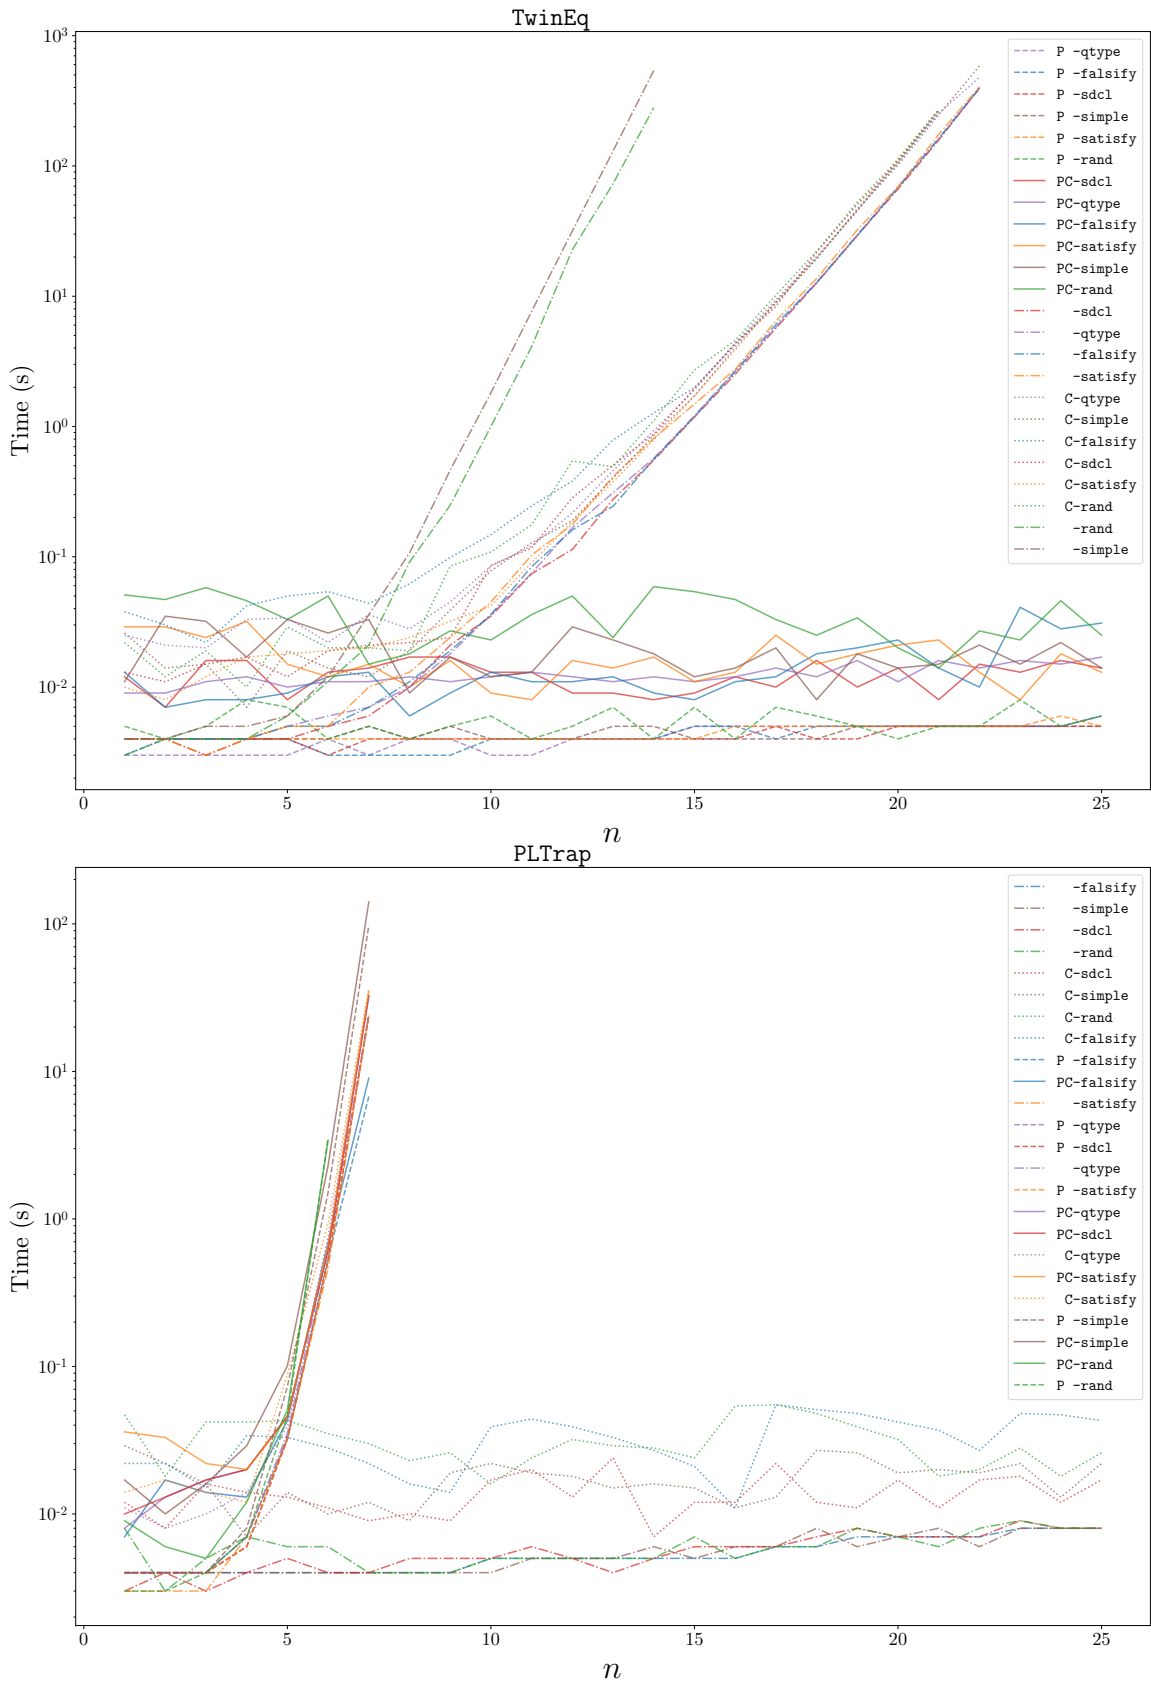


Figure 3: TwinEq (above) and PLTrap (below) formulas documenting Theorem 6.8. Labels indicate whether PLE ("P\*") and SDCL ("\*C") are on, configurations of one kind have the same line style. The rest of the label is the heuristic; configurations with the same heuristic share colour. Gaps in lines indicate time-outs at 10 minutes. The legend is sorted in descending order of performance.

### MirrorCR

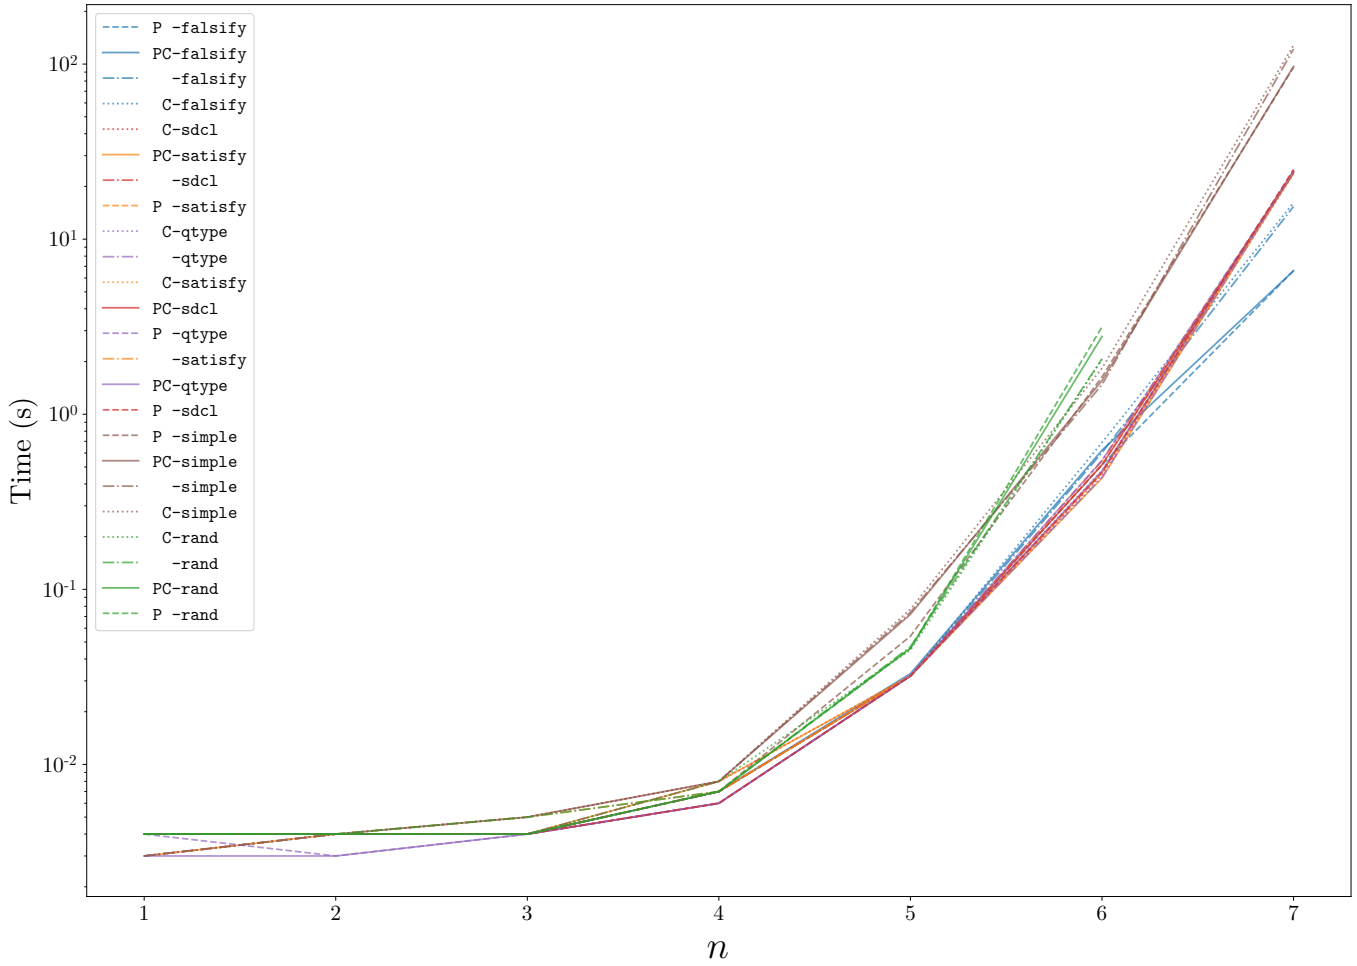


Figure 4: MirrorCR, the same kind of plot as before. We tested the solver on up to  $n = 10$ , but all configurations timed out on  $n \geq 8$ .

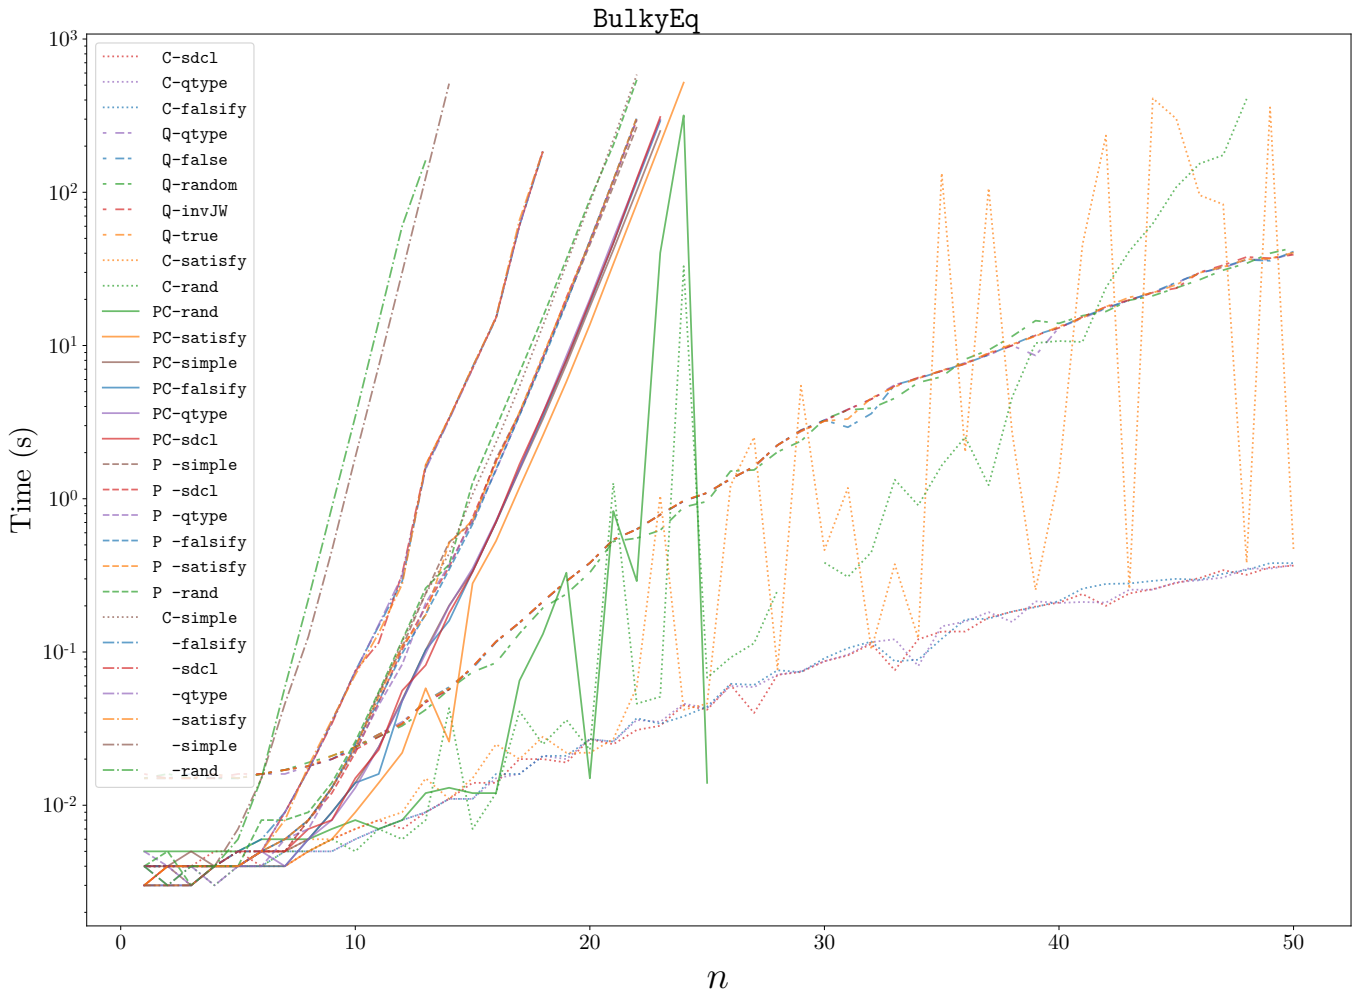


Figure 5: BulkyEq. Lines for Quate start with "Q", the remaining lines are for DepQBF, otherwise the same kind of plot as before.

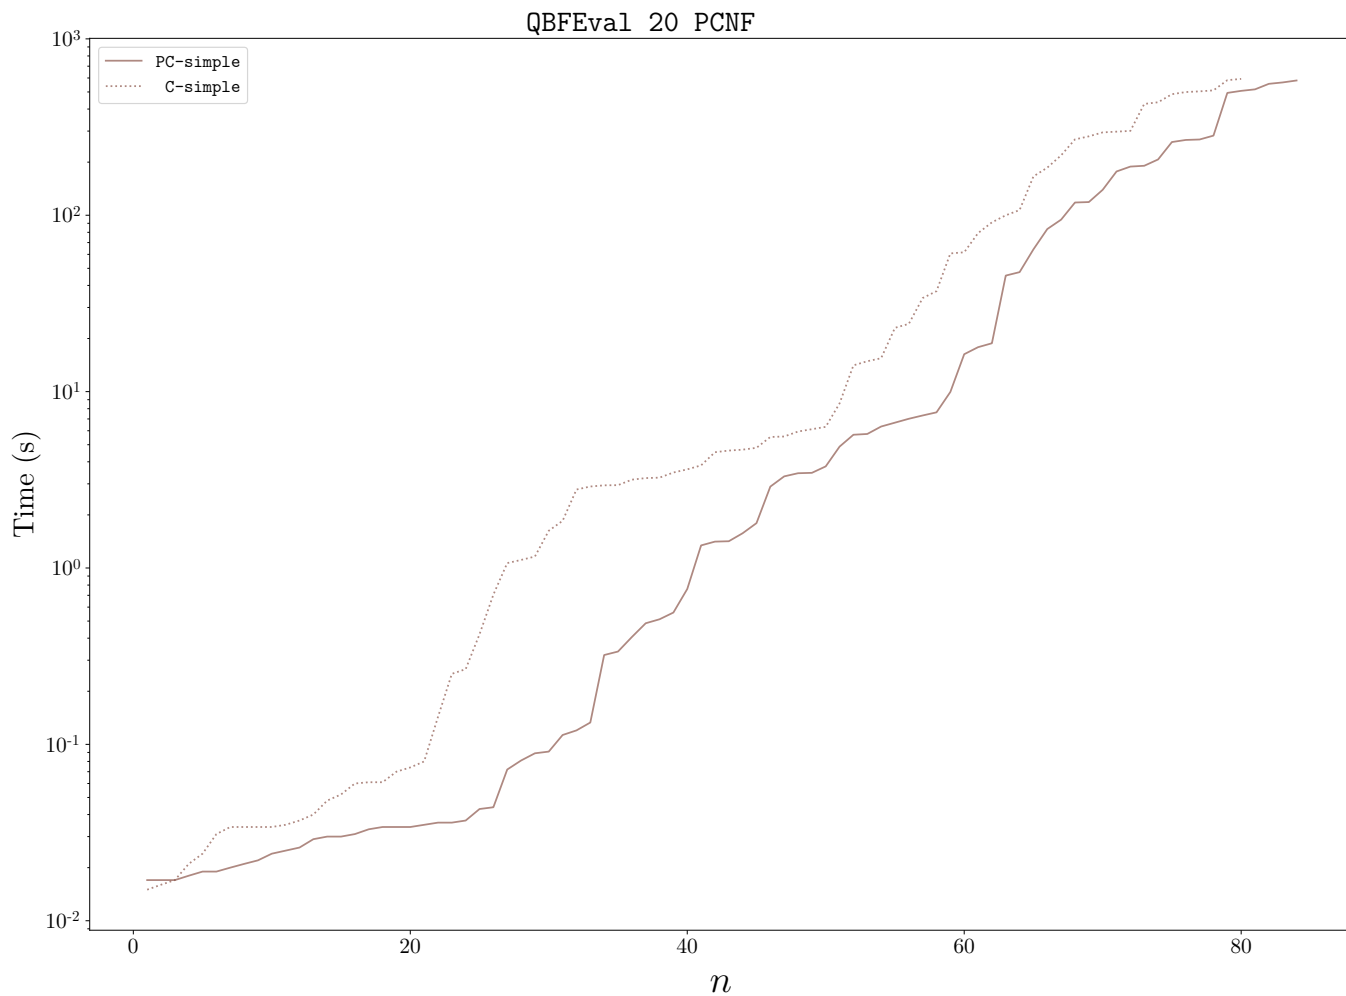


Figure 6: DepQBF on the QBF Evaluation 2020 PCNF Track. Cactus plot;  $(x, y)$  means the configuration solved  $x$  instances in  $y$  seconds. Right and low is better. Lines are labeled like before.

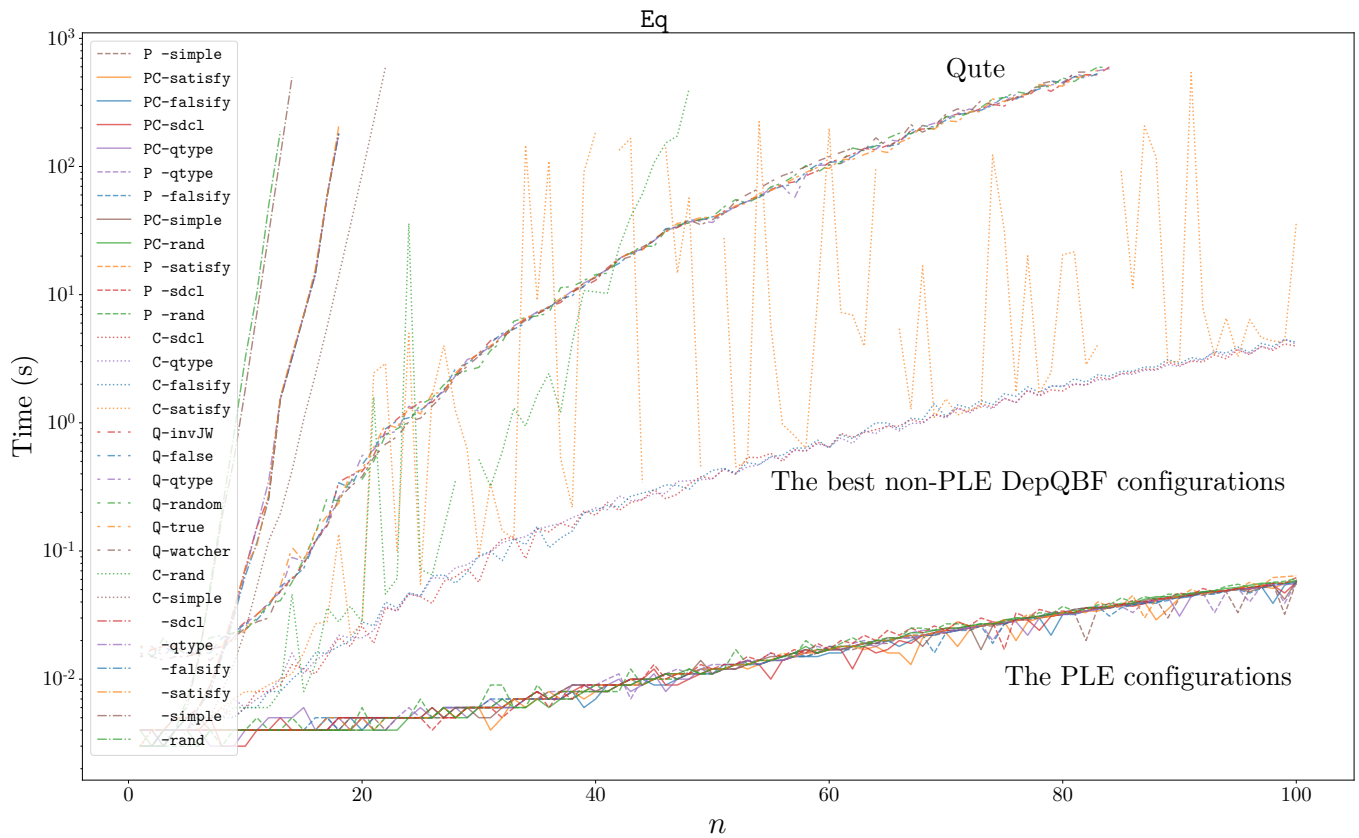


Figure 7: A larger copy of Figure 2.